
TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT

future automation

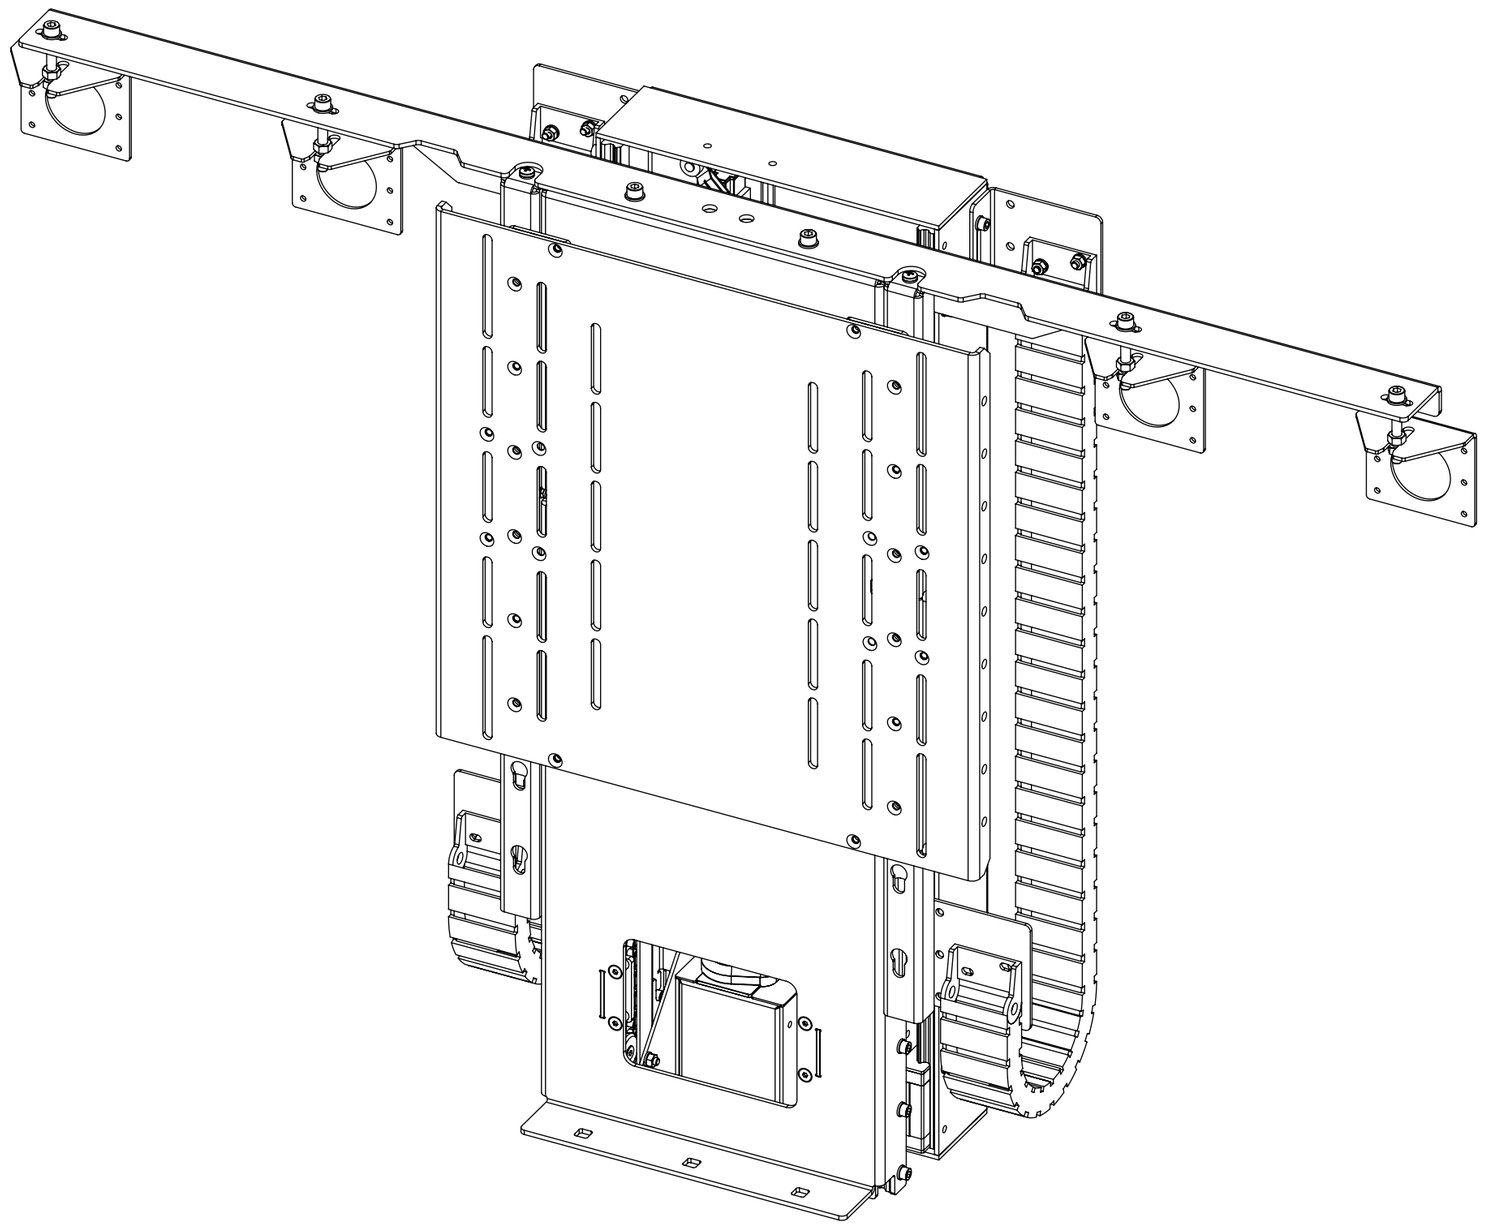

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 1

TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT


future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions	892mm (35 1/8") x 1280mm (50 3/8") x 240mm (9 7/16")
Minimum Screen Height	850mm (33 7/16")
Maximum Screen Height	1175mm (46 1/4")
Minimum Screen Width	1280mm (50 3/8") - (Lower Width option available apon request)
Maximum Weight Capacity (Screen + Enclosure)	75Kg (165lb)
Product Weight	45Kg (99lb)
Packaging Dimensions	TBC
Shipping Weight	TBC
Movement Type	Motorised
Power Supply Required	110V - 240V
Power Consumption Max.	250W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 200, 300, 400 W x 200, 300, 400 H - (Other VESA patterns apon request)
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Outdoor suitable version
Package Contents	Mechanism, IR remote control
Marine Suitable	YES
Outdoor Suitable	YES


TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT


future automation

GENERAL INFORMATION

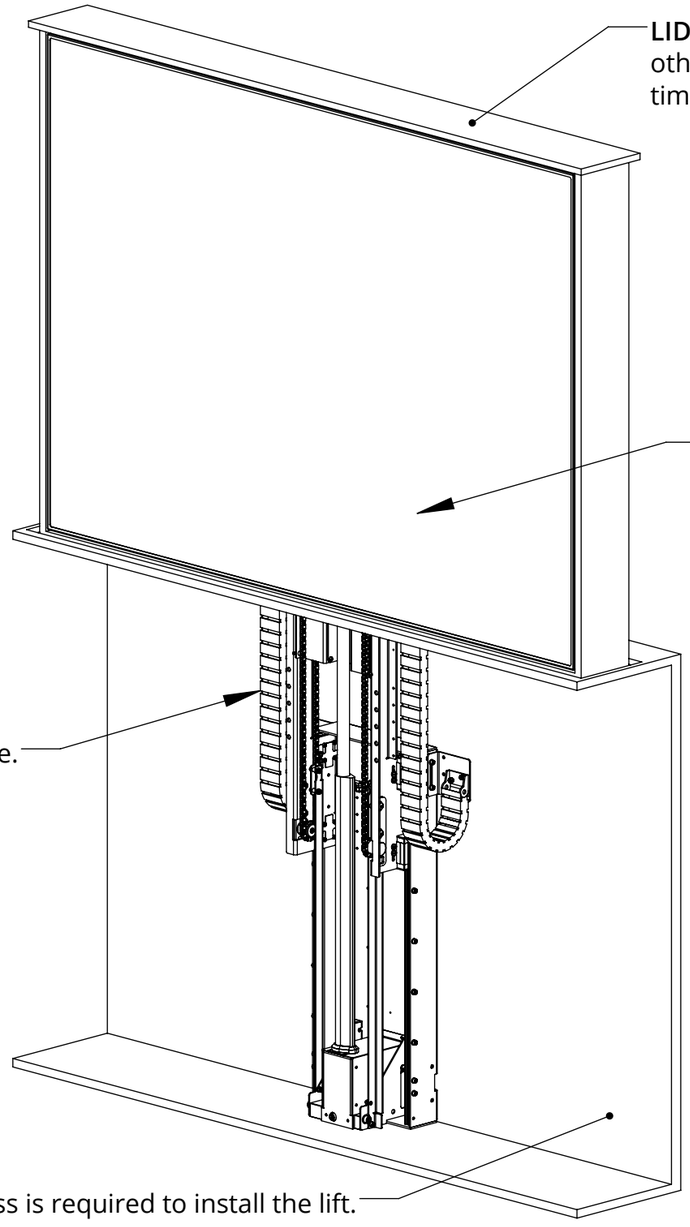

Allow 20mm+ in front of the screen if the mechanism is to be partially sunk below floor level.

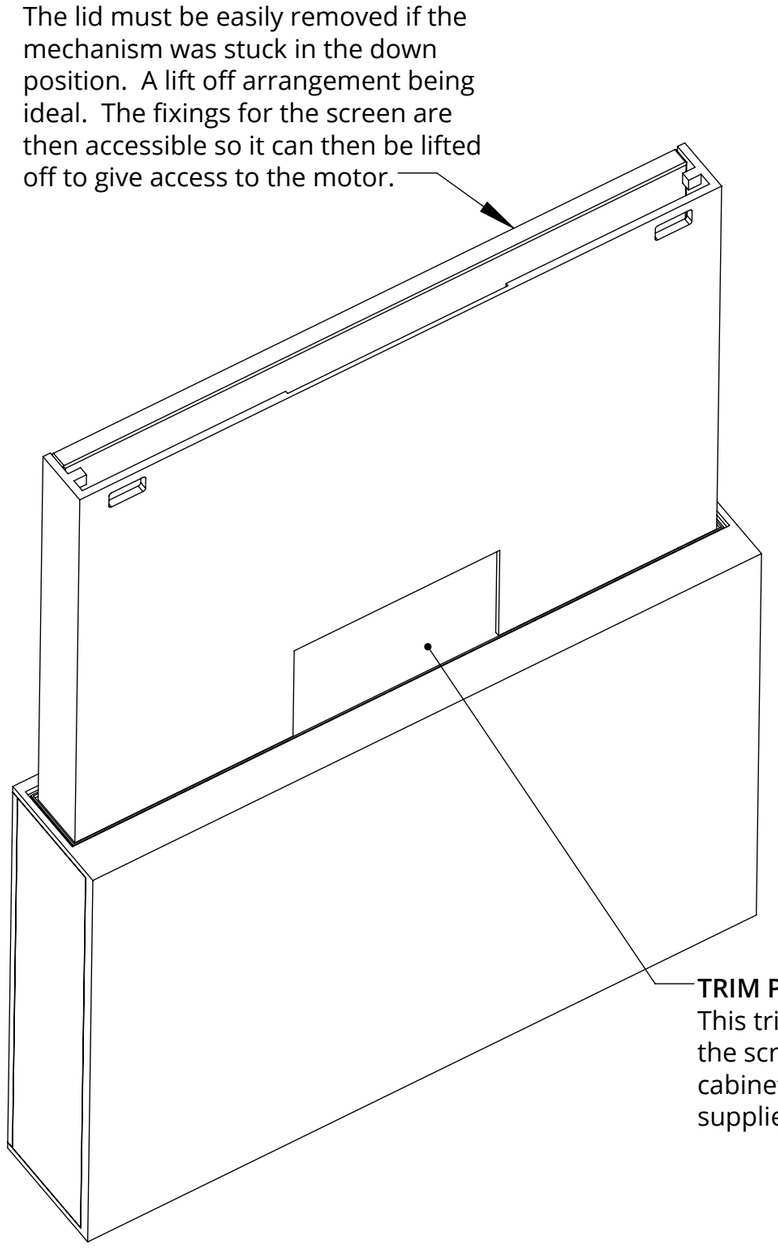

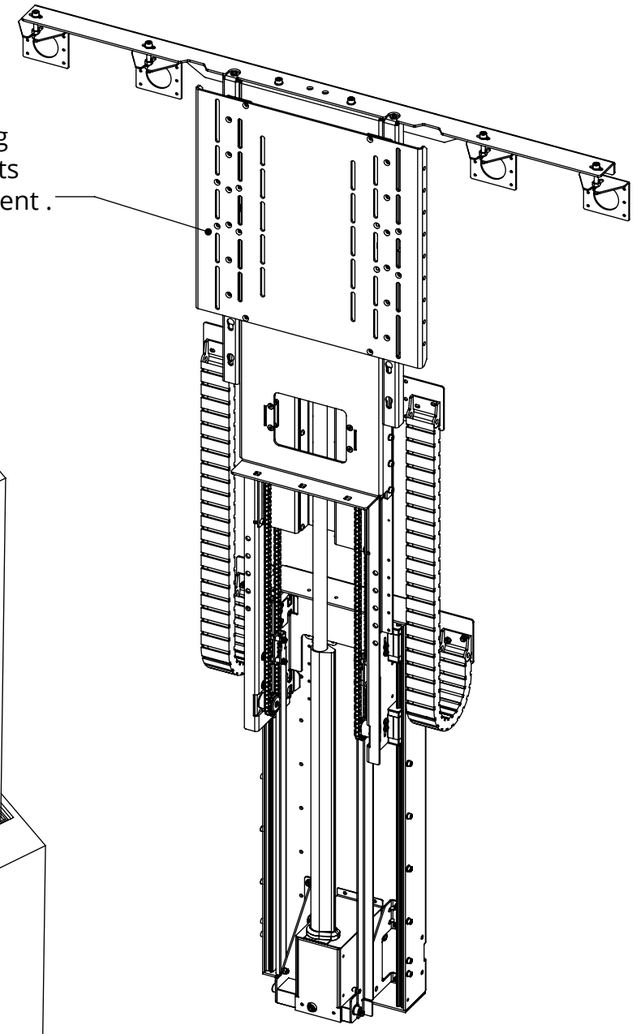

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 003
SHEET 3

TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT


future automation

CABINET SIZING


All sizing calculations are based off a 20mm [0.79"] box enclosure panel thickness. Any increases in this thickness will increase the required space.

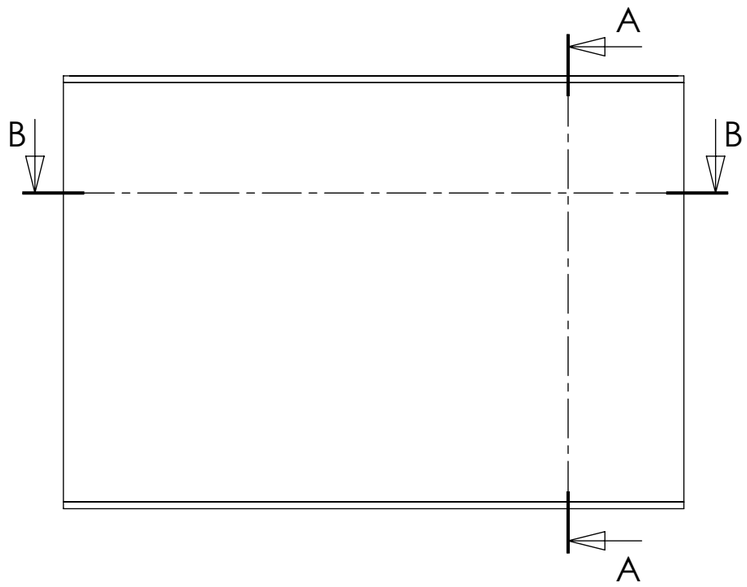


SECTION B-B
SCALE 1 : 8

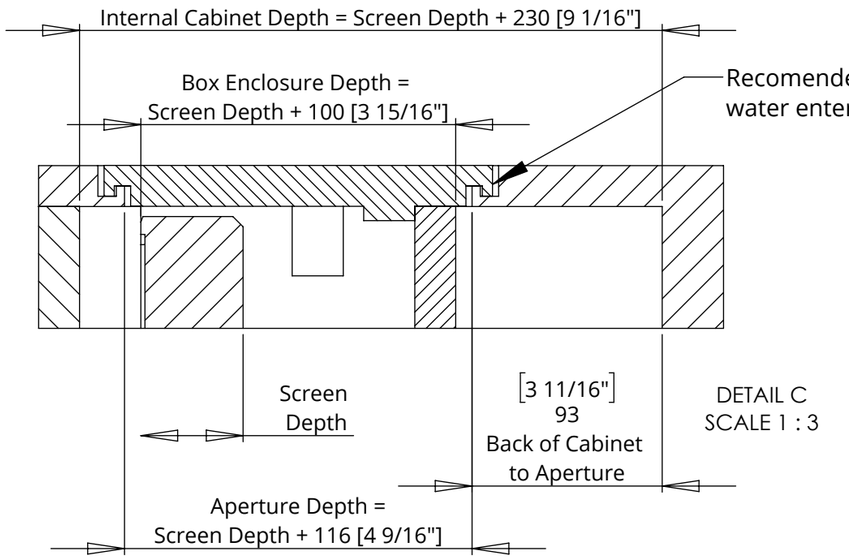

DETAIL C
SCALE 1 : 3

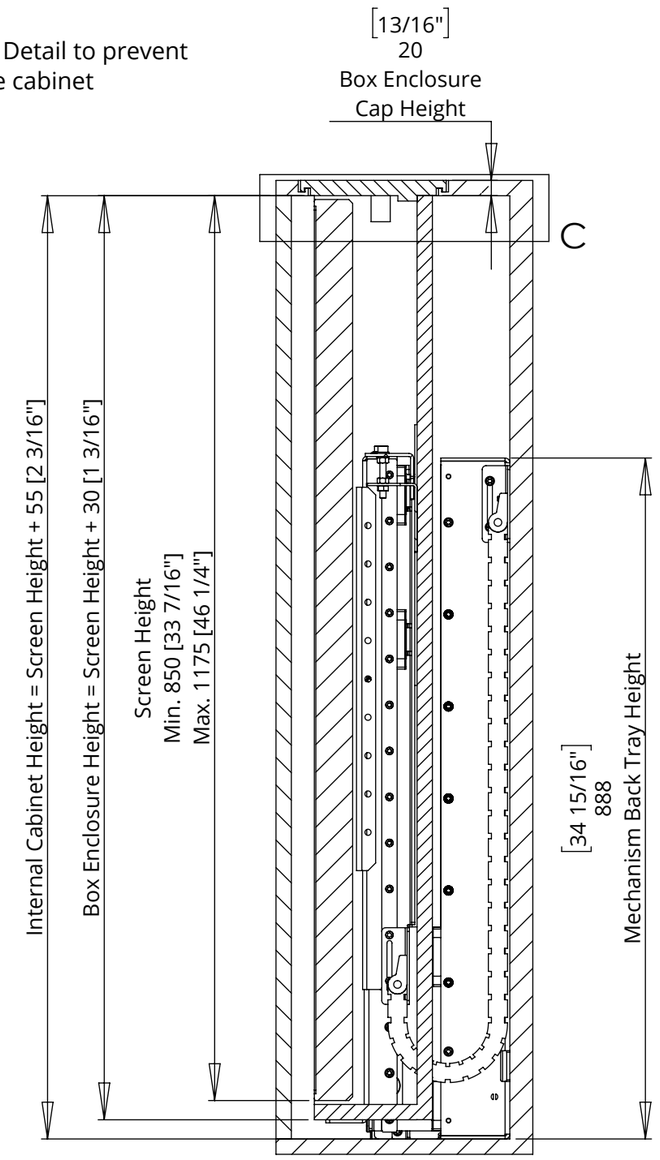


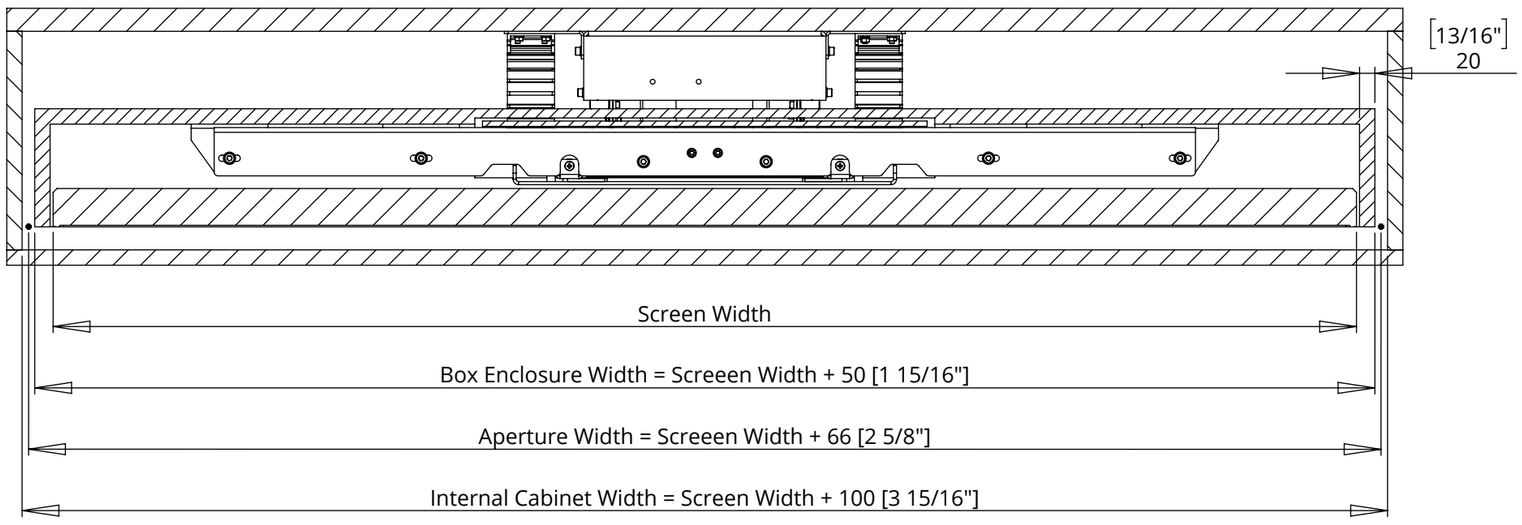


TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT


BOX ENCLOSURE DETAILING

The Screen, Enclosure, Lid and the Trim panel must weigh no more than **75Kg**.

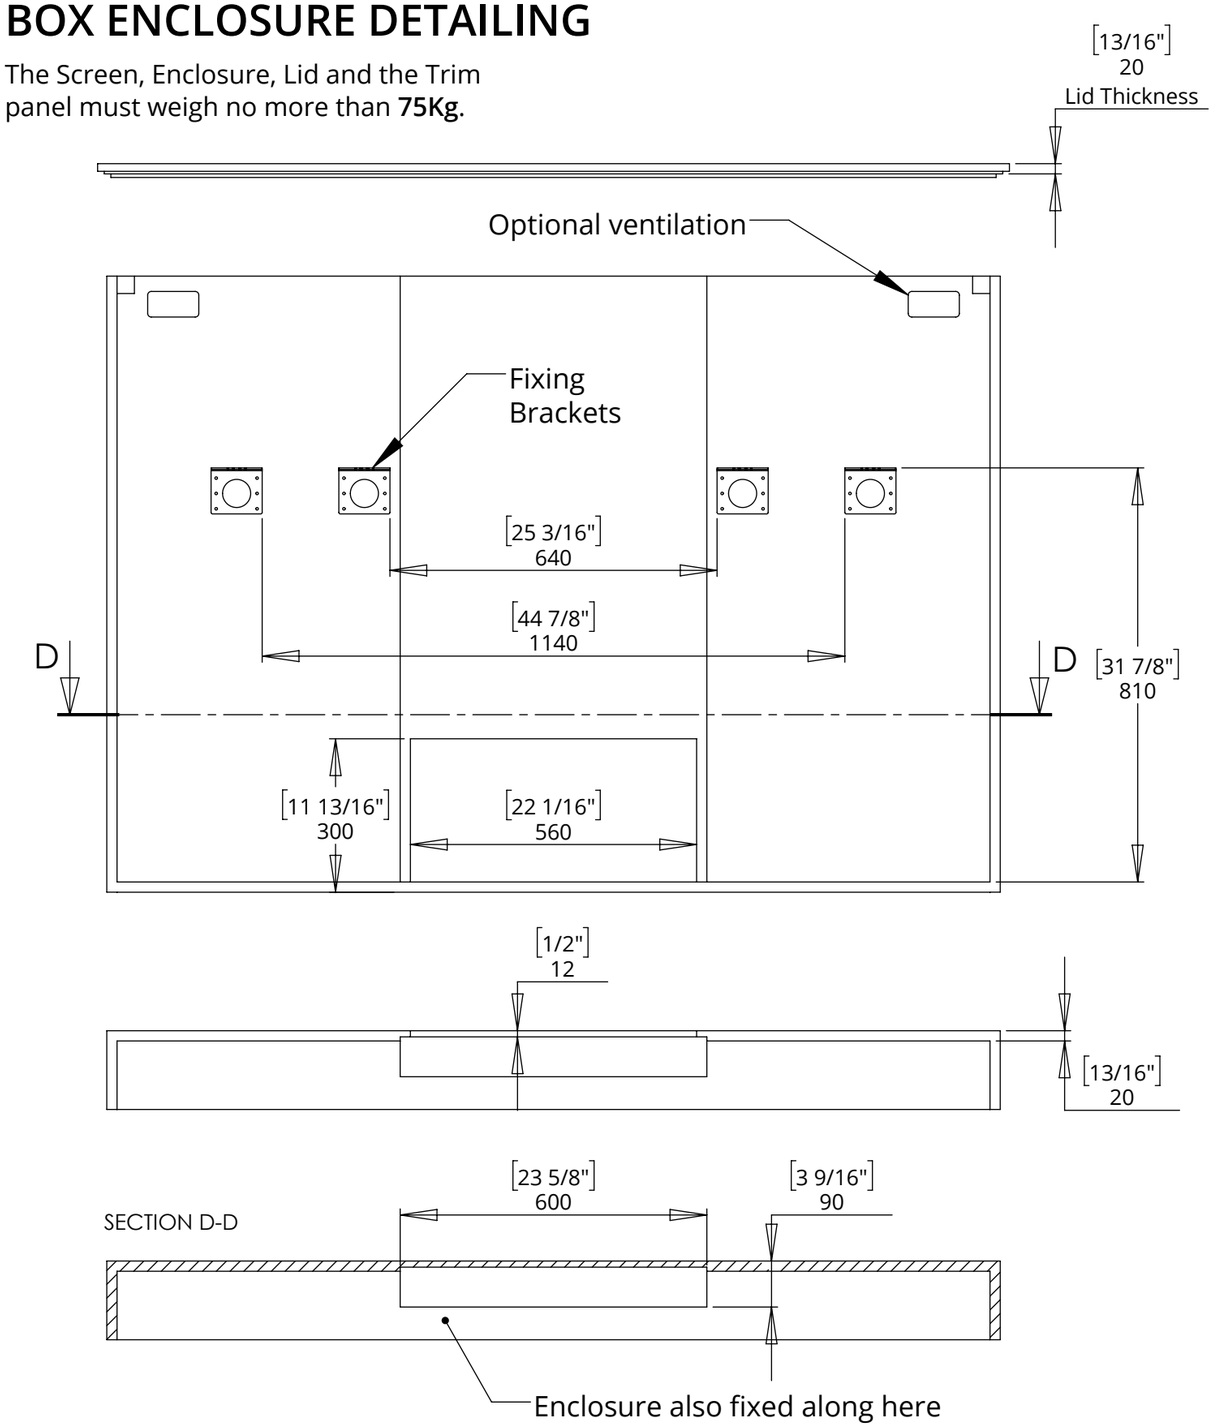

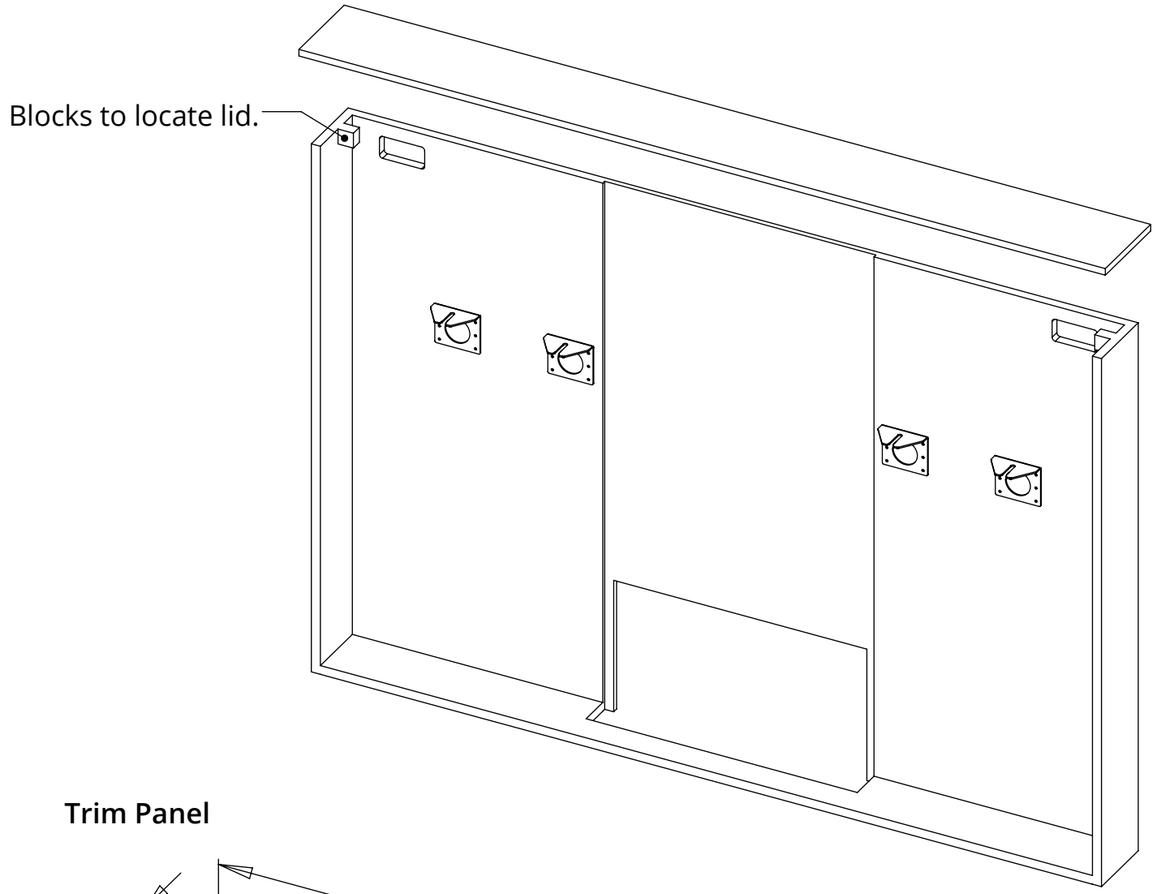

Trim Panel

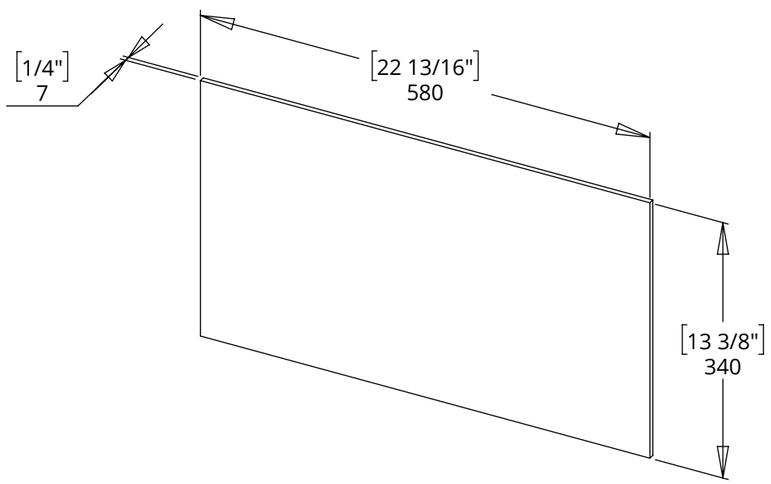

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 003
SHEET 5


TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT

INSTALL INSTRUCTIONS

Check that the cabinet, enclosure, lid and the trim panel are made to the details shown on the previous pages.

- You can stand the mechanism up on its base to test it before putting in the cabinet. See control document for details. Use the IR remote with caution and always cover the STOP button in case of issues.
- Centrally fix the mechanism to the back of the cabinet in the places shown.
- Run up and down and then add the enclosure.
- Adjust the position of the enclosure and adjust the up and down switches with caution. Temporarily add lid to check height.
- Run screen cables up into enclosure. Secure cables as they enter and leave the cable tracks with cable ties. Make sure no cables can get tangled or caught as the mechanism moves.
- Add trim panel. And adjust. This trim panel moves up into position as the TV lifts. Observe this movement and understand it before fixing.
- The upright plate can be adjusted in height by moving it to a different set of keyholes. Fix the plate to the back of the screen and mount to mechanism using the keyholes. Ensure the plate is secured using the fixing bolts located at the top of the keyhole plates.
- Check movement with screen with caution.

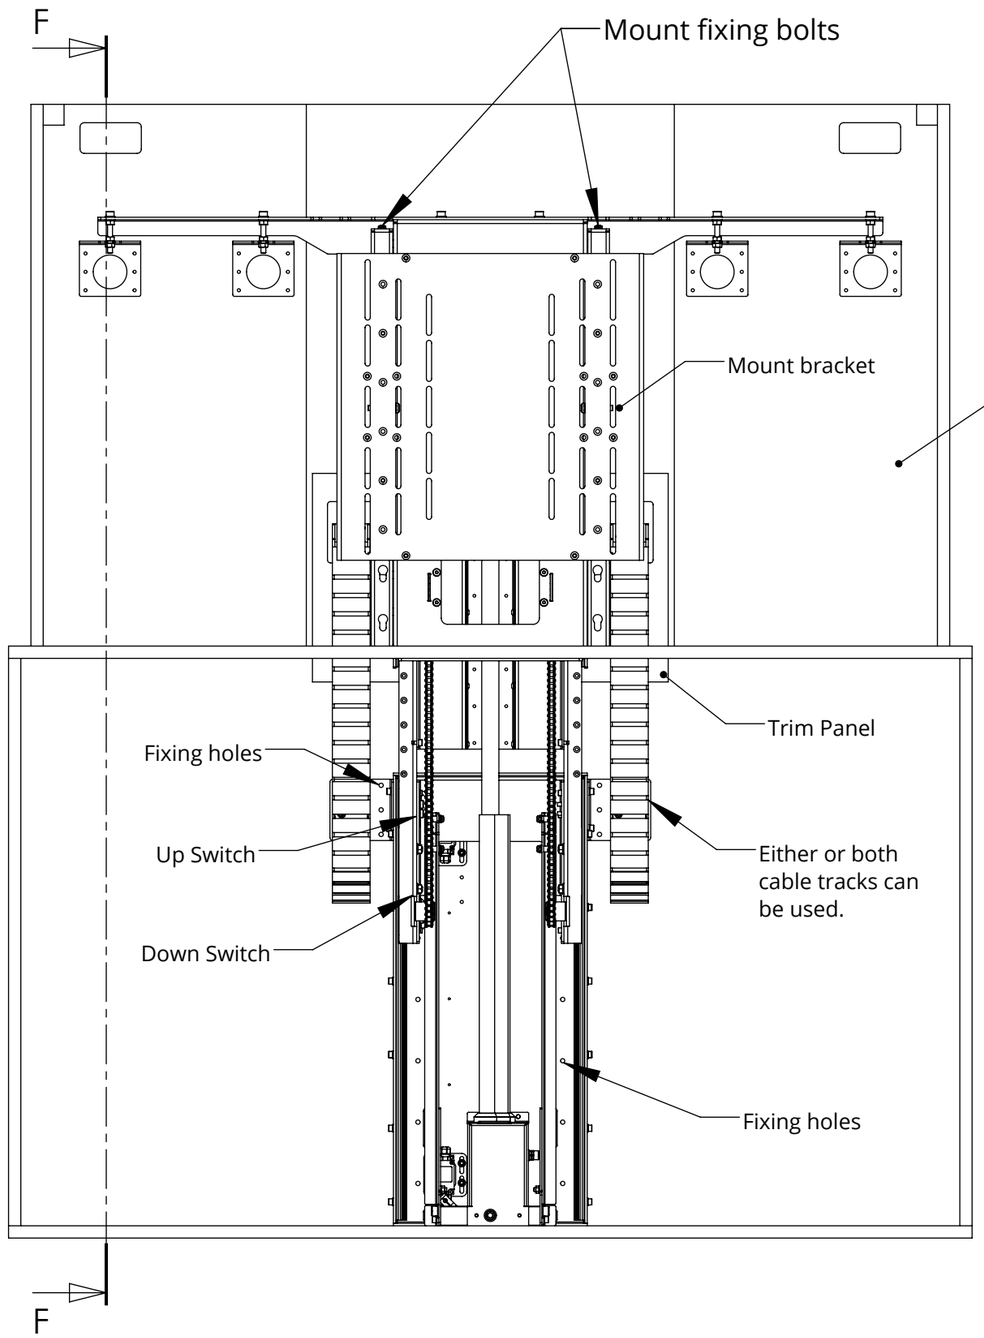

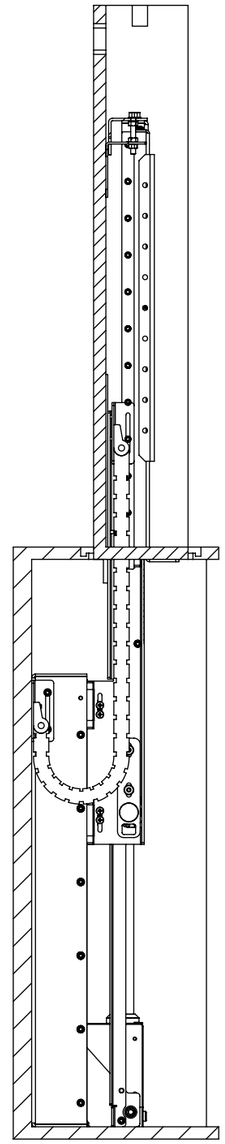


SECTION F-F


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 003
SHEET 6

TSLM-MO-3
MARINE OUTDOOR TELESCOPIC SCREEN LIFT

future automation

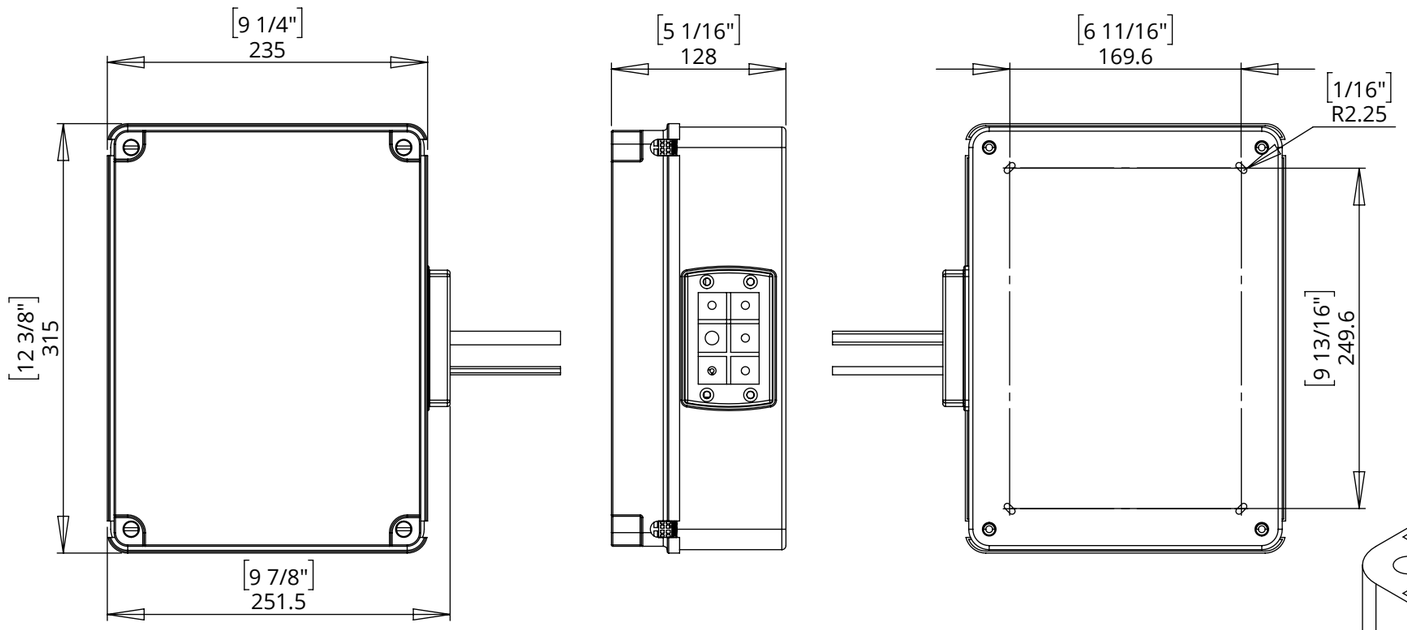

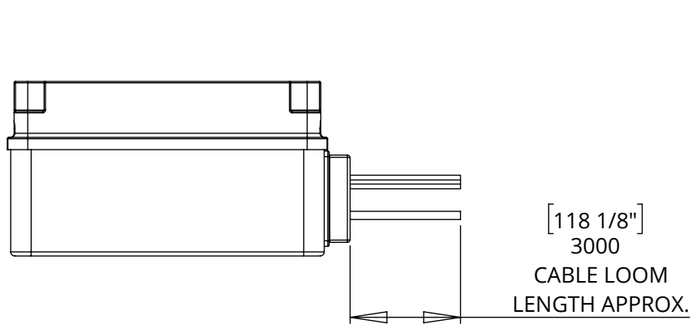

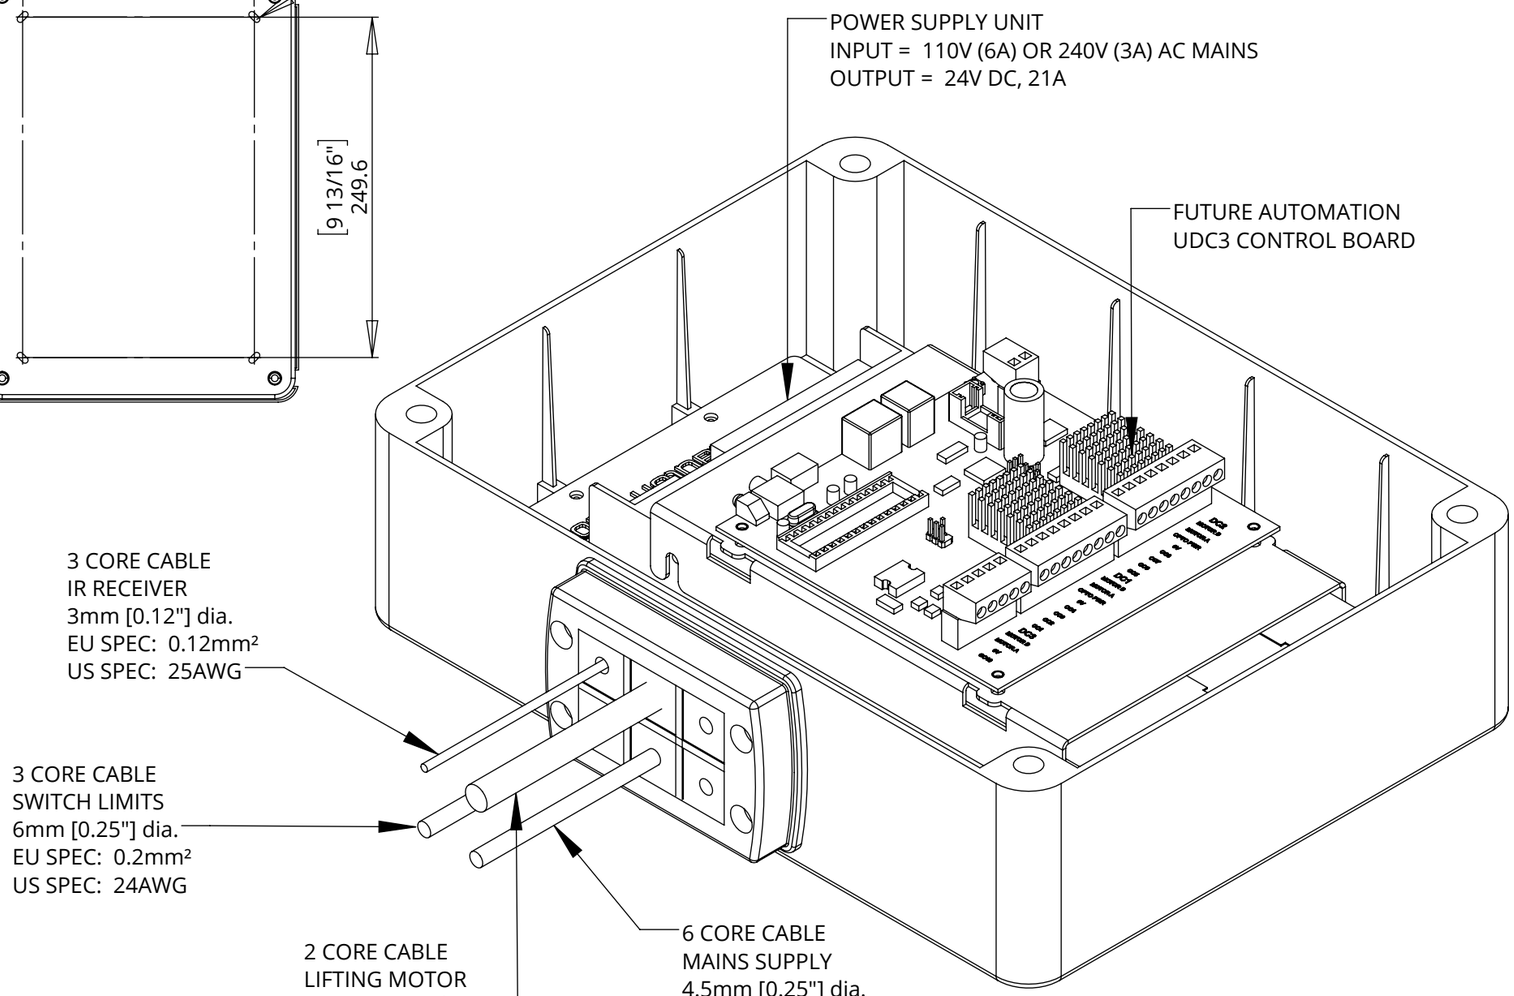

NOTES

- ENCLOSURE AND CABLE GLANDS RATED TO IP56.
- ENCLOSURE AND LID FIXINGS ALL MADE FROM GEWISS GW PLAST 75.
- ENCLOSURE MATERIAL SUITABLE FOR TEMPERATURES +60˚C TO -25˚C.
- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 7