


CHRS7-M


MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL

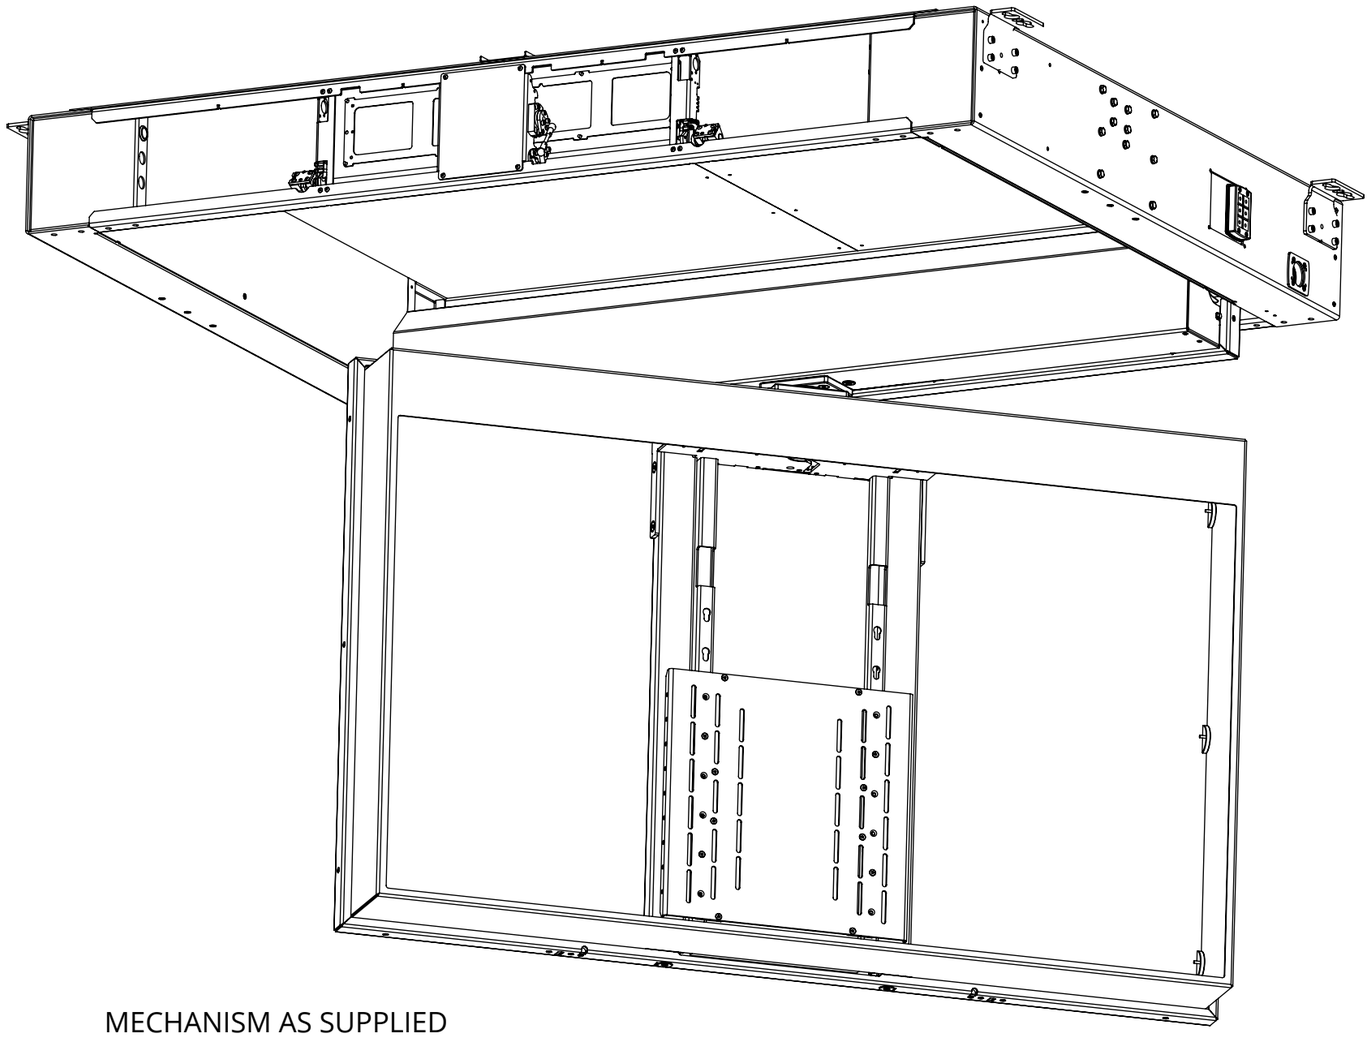

MECHANISM AS SUPPLIED

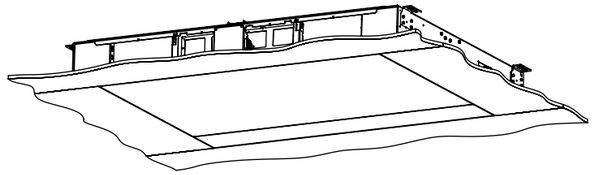

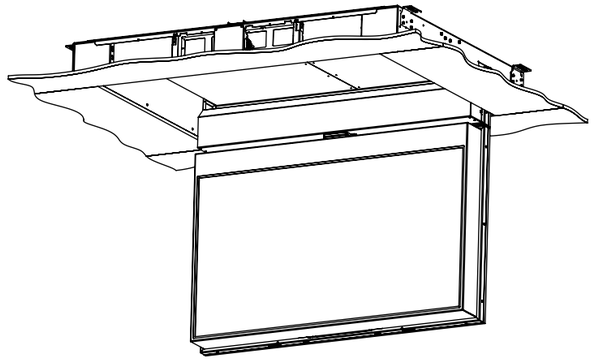

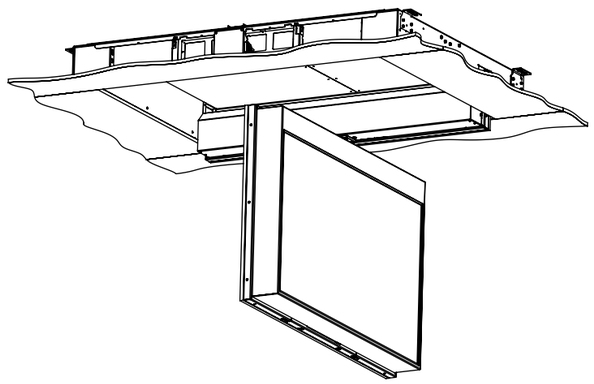

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 004
SHEET 1


CHRS7-M
MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL


SPECIFICATION	MEASUREMENTS
Product Dimensions	2224mm [87 9/16"] W x 1562mm [61 1/2 "] L x 255mm [10 1/16"] D
Product Weight	230Kg [507lb]
Maximum Screen Size (≤70mm D)	1730mm [68 1/8 "] W x 970mm [38 3/16"] L x 70mm [2 3/4 "] D
Maximum Screen Size (>70mm D)	1730mm [68 1/8 "] W x 940mm [37"] L x 130mm [5 1/8 "] D
Maximum Weight Capacity	150Kg [331lb] Max. - Inc 30Kg [66lb] Max. Addon Ceiling Panel Main Hinge & 10Kg [22lb] Max. Addon Ceiling Panel Swivel Back Tray **Assuming Screen Weight Biased Low (3/4 Screen Height)*
Packaging Dimensions	2270mm [89 3/8 "] W x 1720mm [67 11/16"] L x 490mm [19 5/16"] D
Shipping Weight	383Kg [844lb]
Maximum Rotation	90˚ on Hinge 180˚ CW and CCW on Swivel
Movement Type	Motorised
Control System	Housed internally - Accessible through internal access hatch.
Power Supply Required	110V - 240V AC 50-60hz
Power Consumption Max.	720W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Marine suitable version
Package Contents	Mechanism, IR remote control
Environment	Marine Indoor
Colour	WHITE - RAL9910 Satin Finish
Marine Suitable	Yes - Marine Locks for seucre stowing when not in use

CHRS7-M
MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL

MECHANISM MOUNTING DETAILS

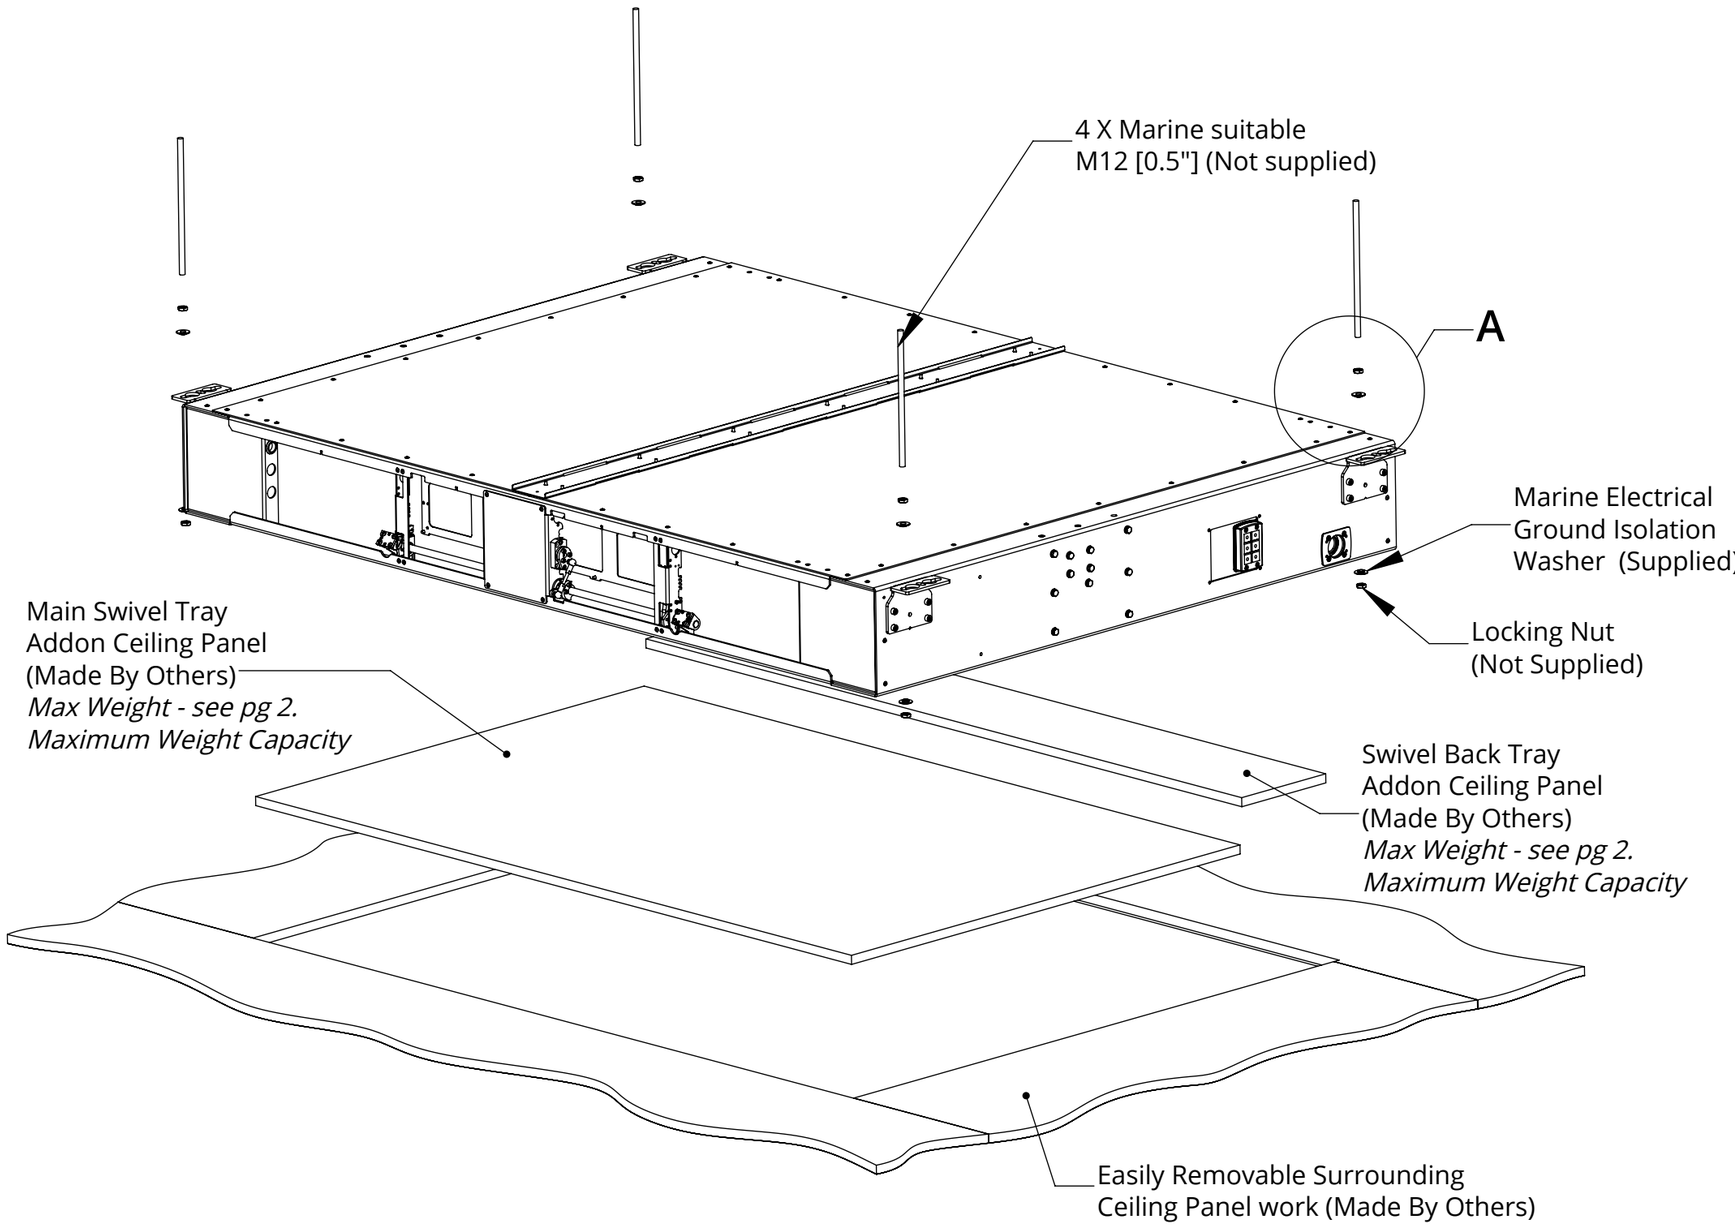

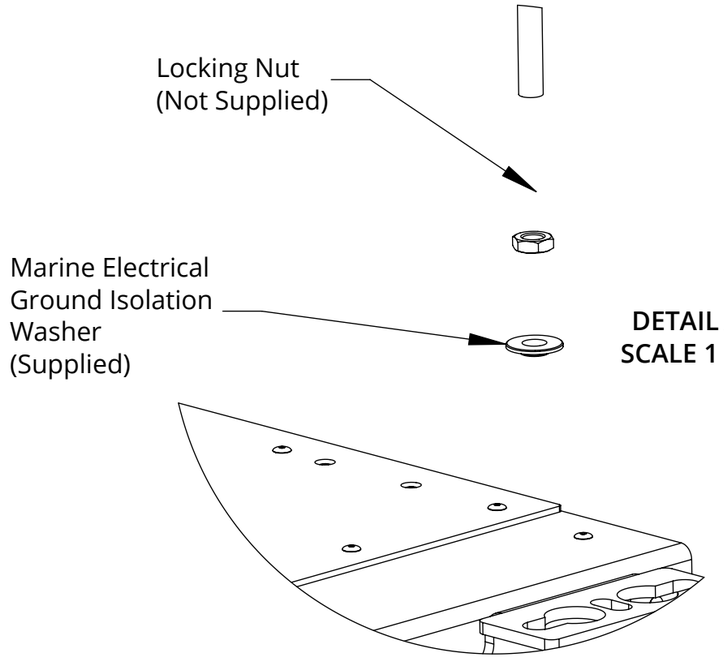

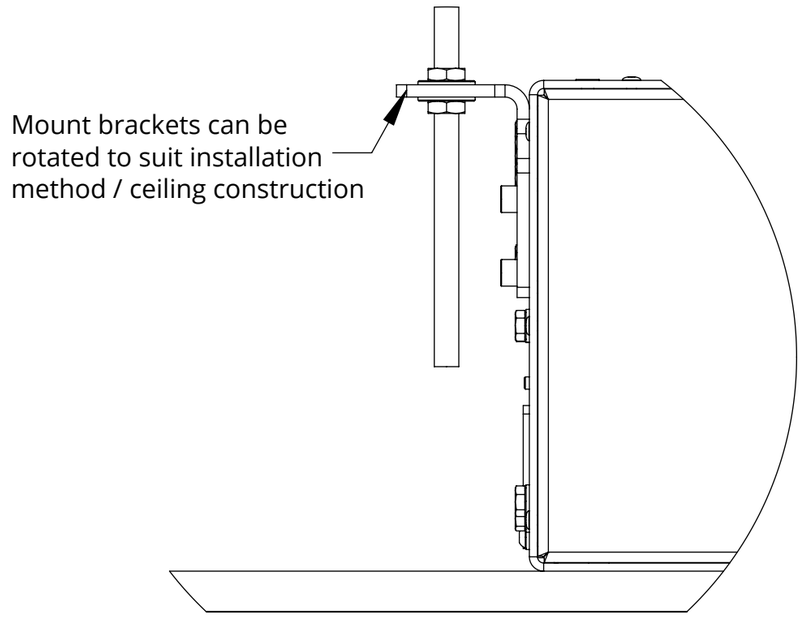


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 004
SHEET 3


CHRS7-M
MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL

CEILING PREPARATION

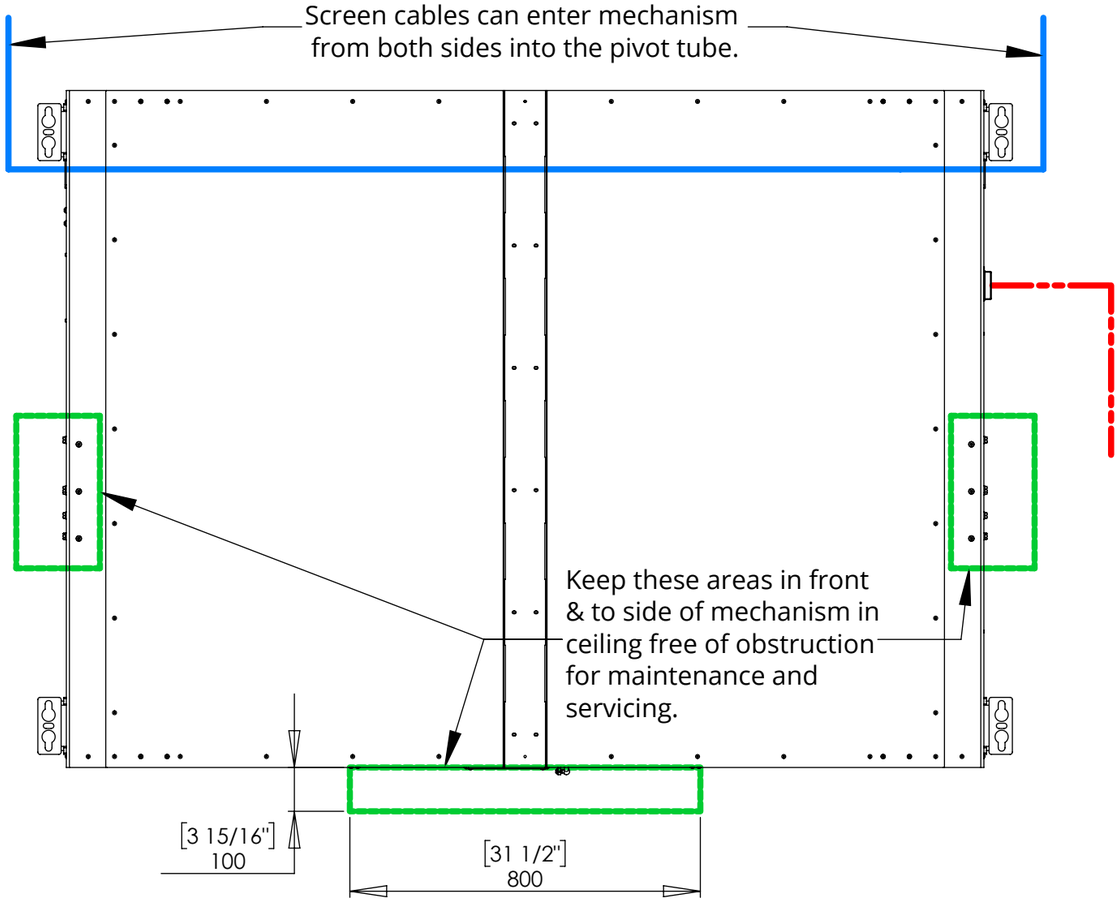

Mechanism Power and Control Cables.

Screen power and Signal

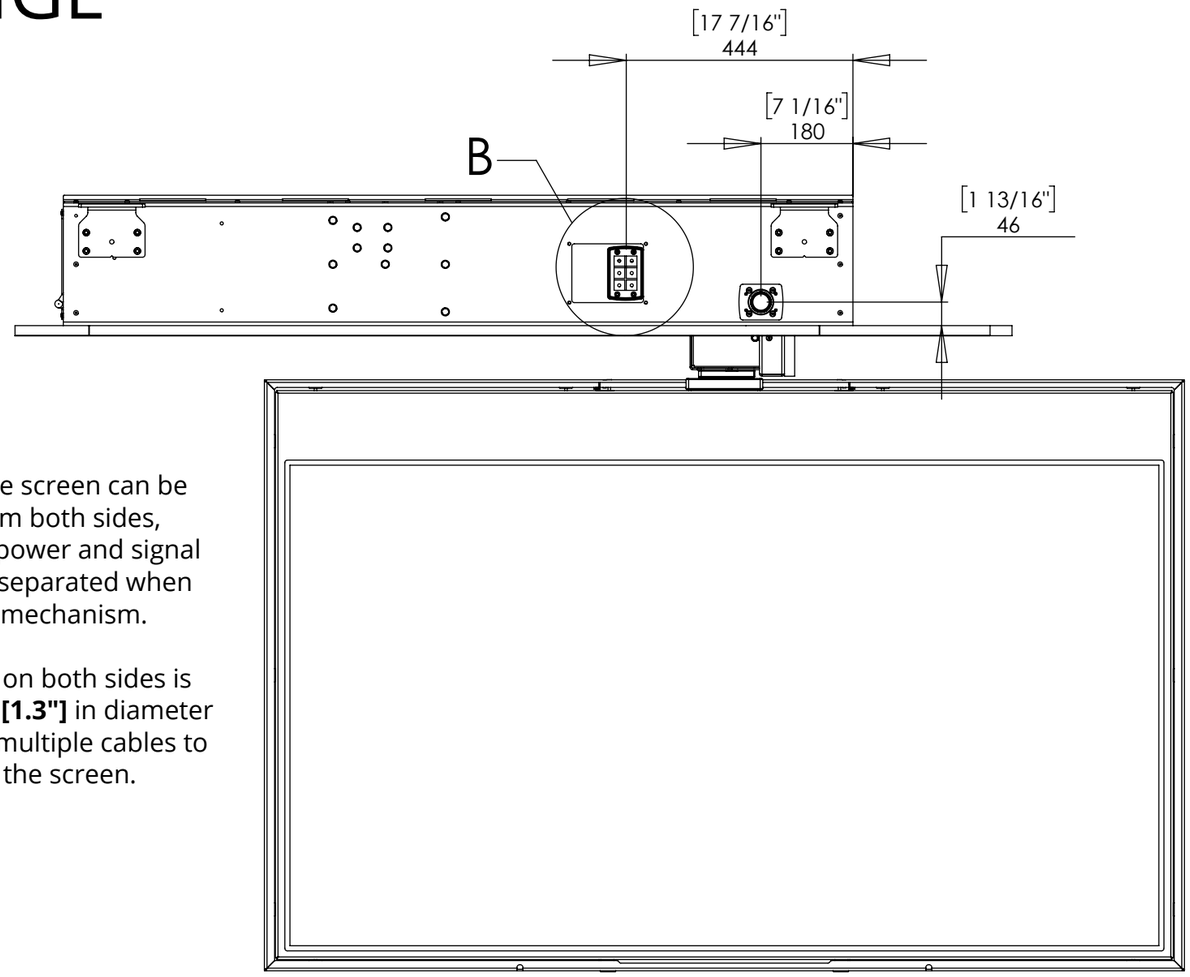


Cables for the screen can be routed in from both sides, allowing for power and signal cables to be separated when entering the mechanism.

The opening on both sides is **MIN. 32mm [1.3"]** in diameter allowing for multiple cables to be routed to the screen.

Cables pass through easily removable cable gland plates into mechanism.

Additional glands to suit different cable sizes are available on request.

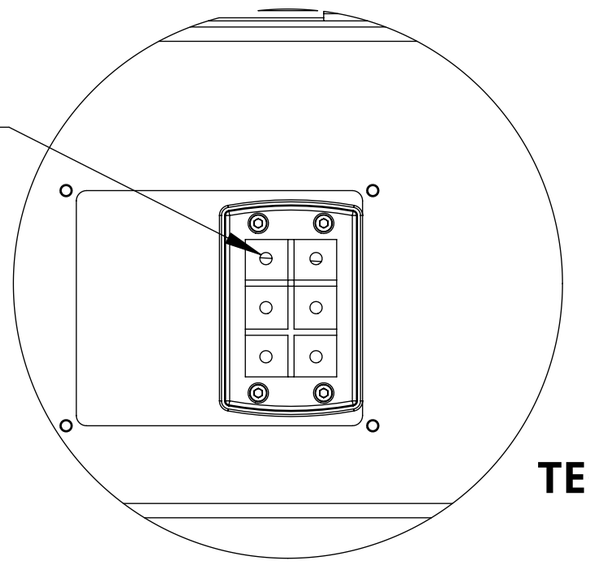


DETAIL B
SCALE 1 : 3


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 004
SHEET 4

CHRS7-M
MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL

CEILING DETAILS

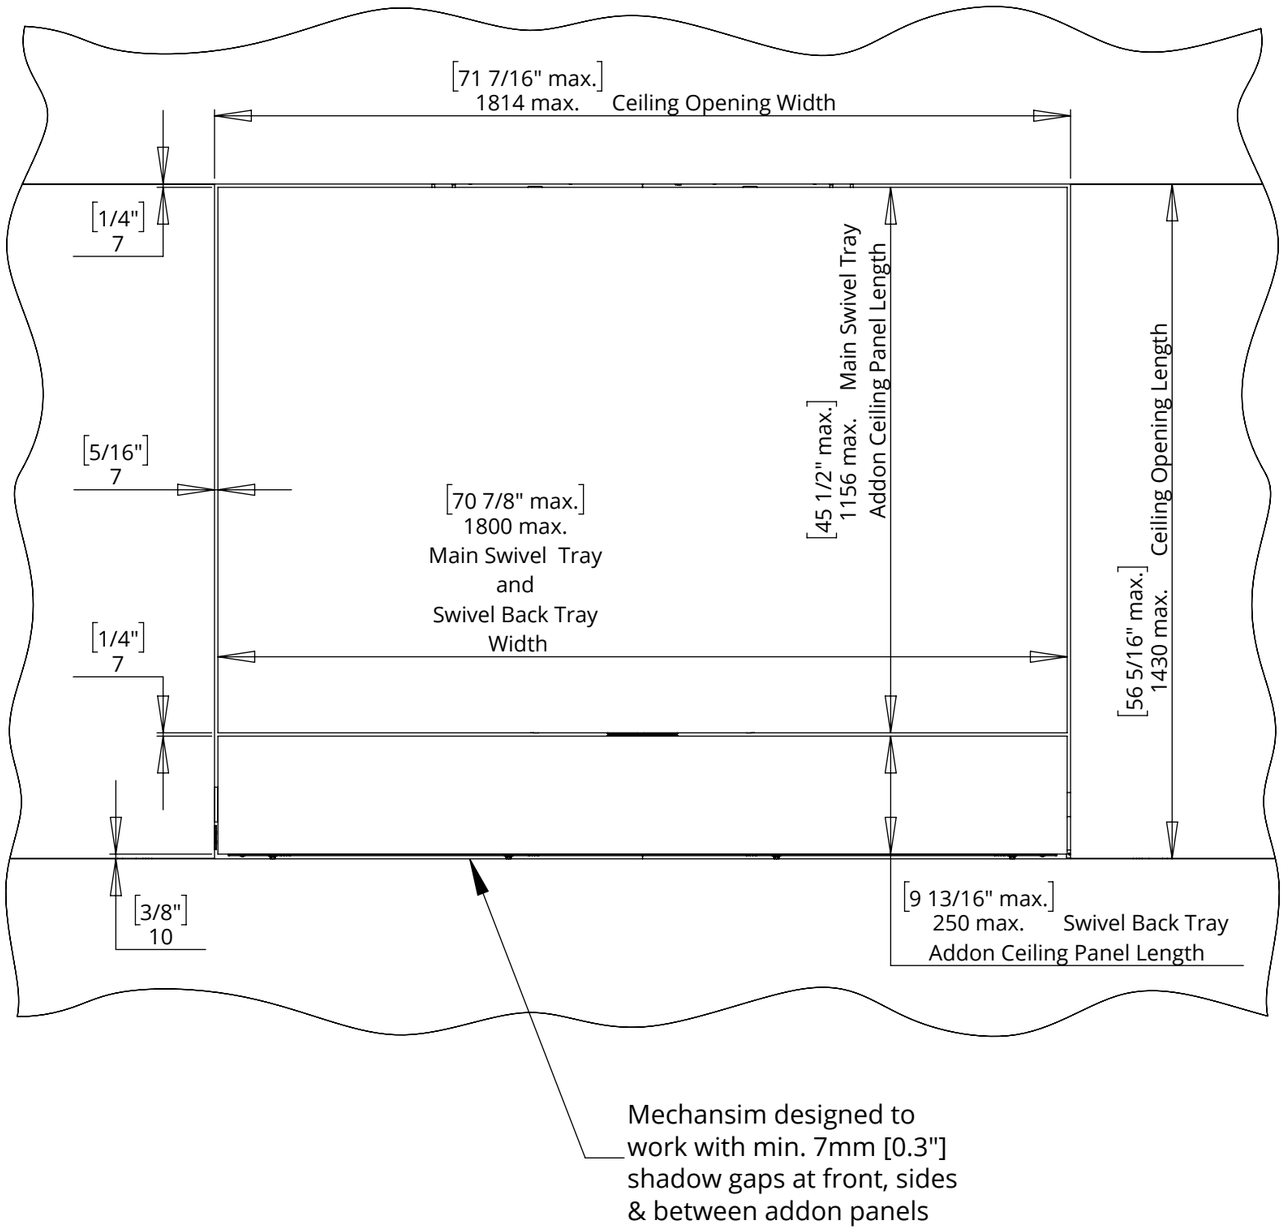

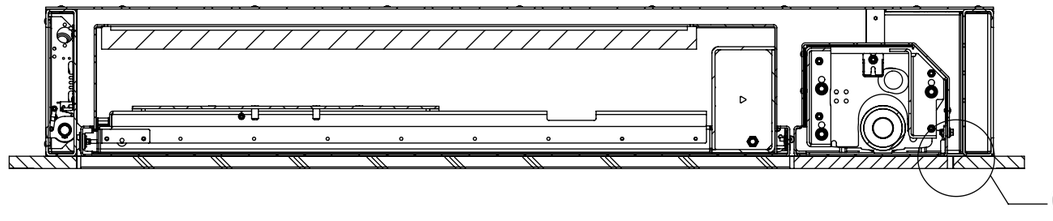

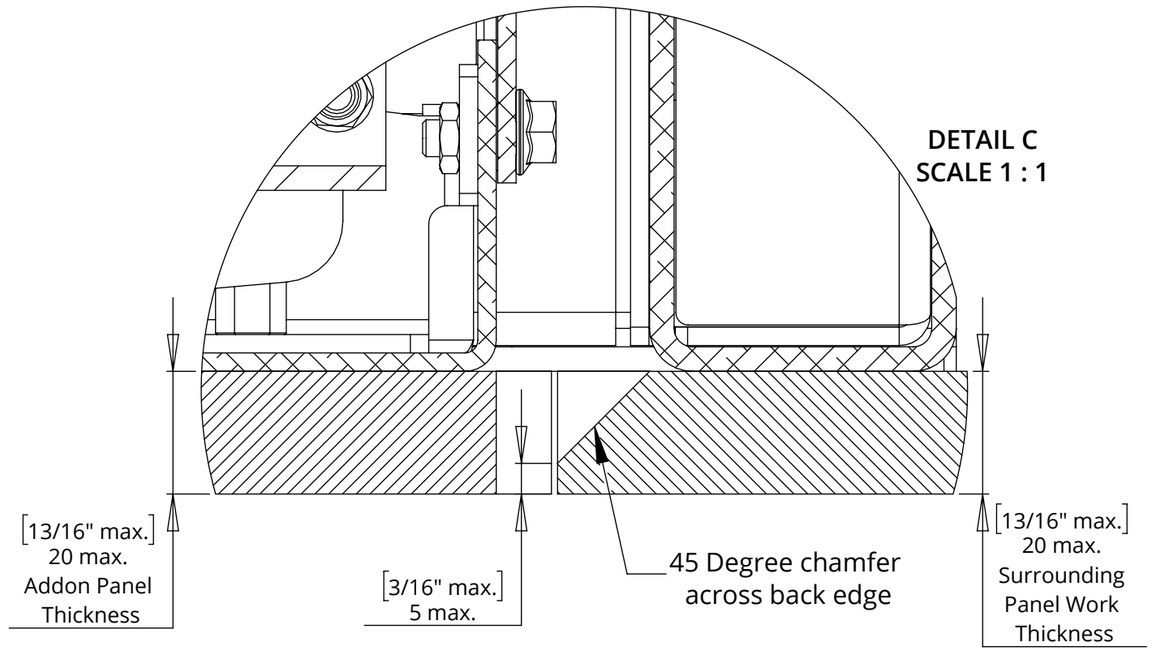


Ensure all panel work is the same thickness.


Weight of all addon panel work must be included in maximum mechanism lifting capacity.


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

CHRS7-M
MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL

MECHANISM DIMENSIONS - CLOSED

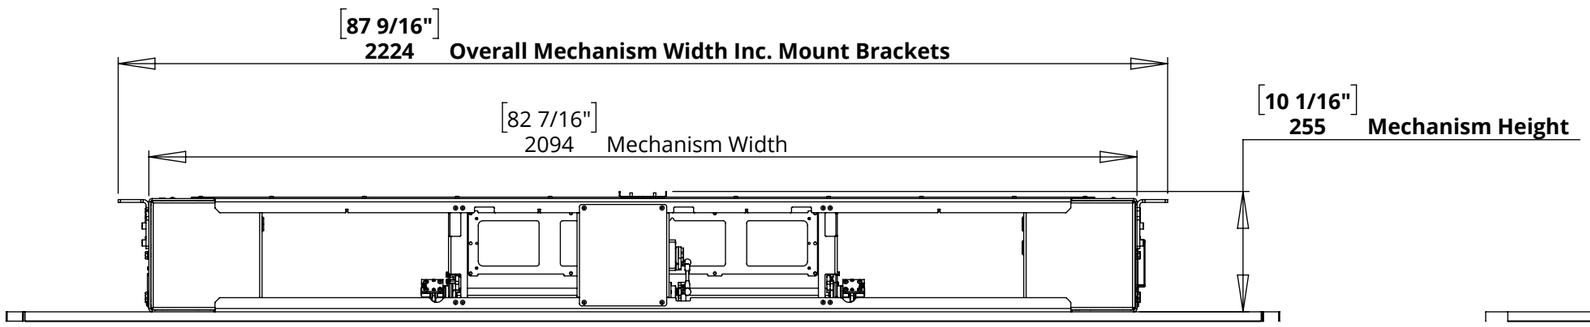


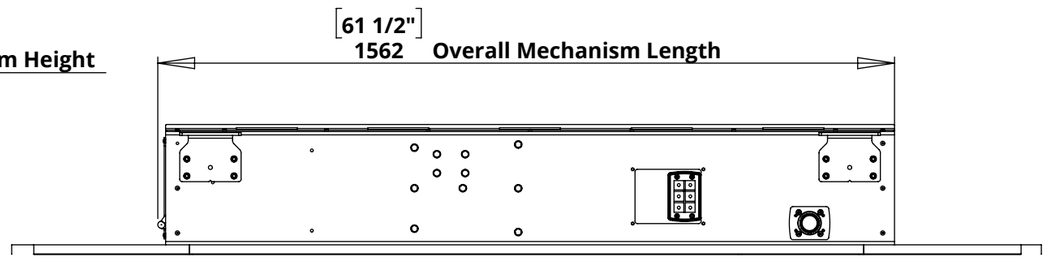

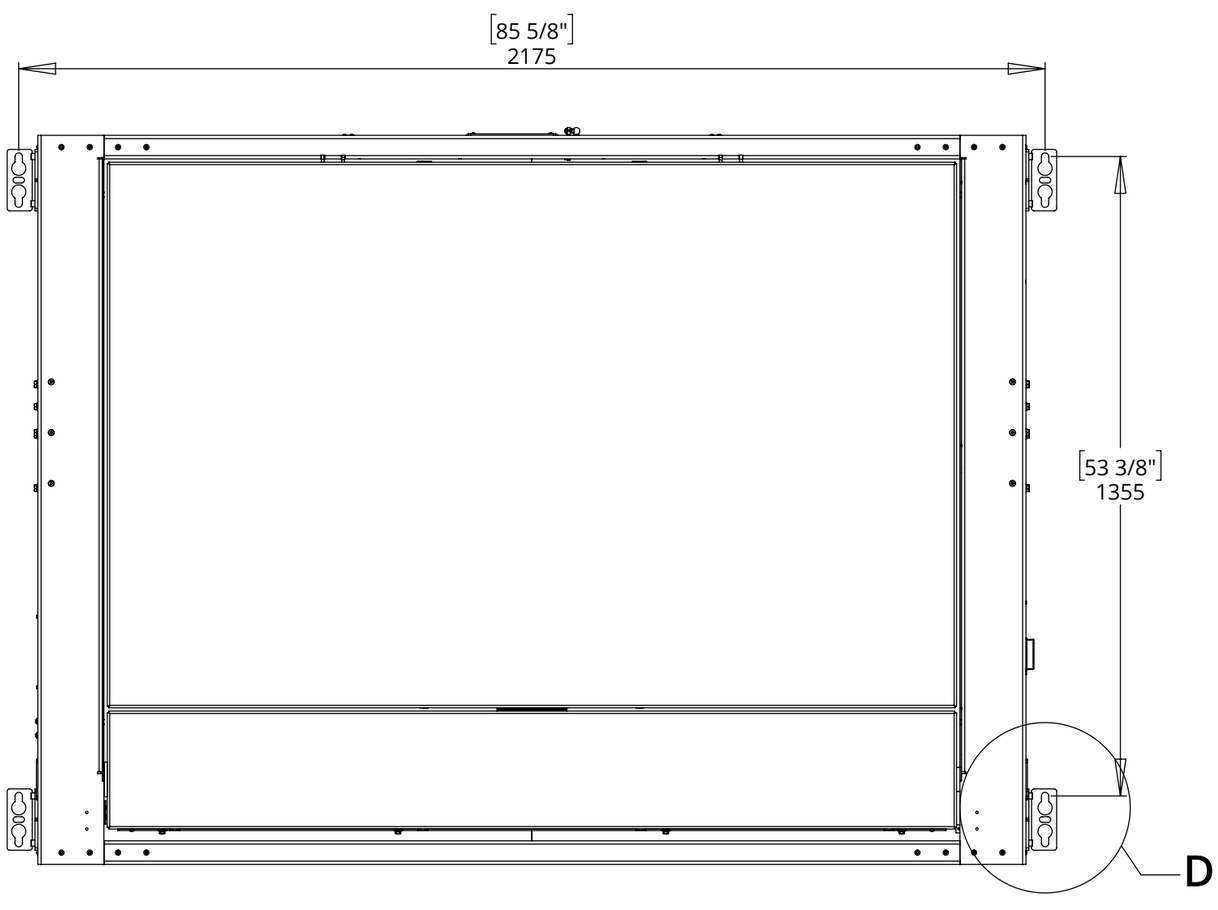

FIXING DETAIL

Mechanism mounted on M12 [0.5] Studding or fixed to underside of the ceiling joist structure, both using the mounting brackets installed on mechanism as standard

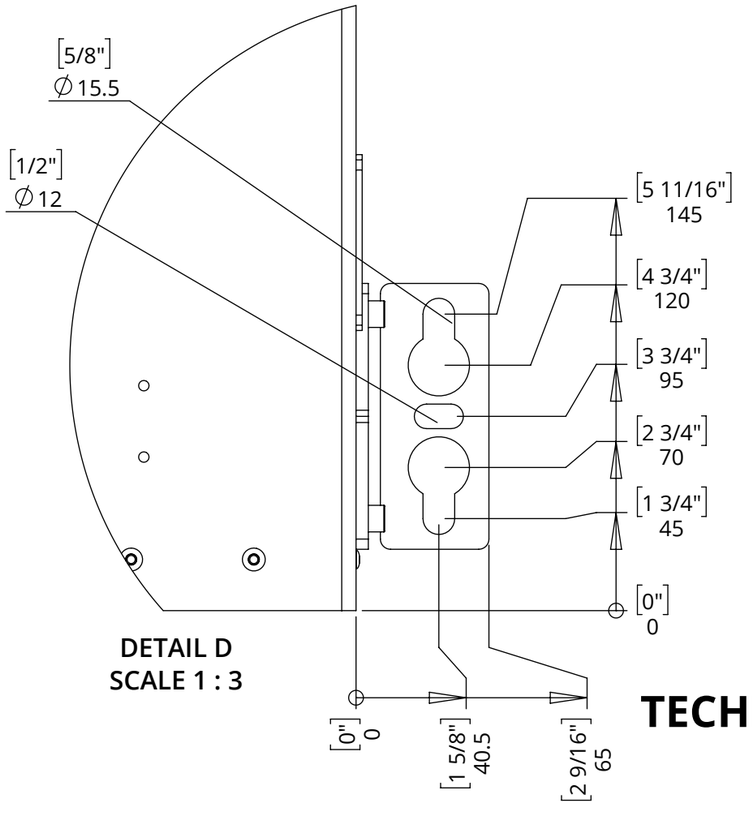


DETAIL D
SCALE 1 : 3

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 004
SHEET 6

CHRS7-M
MARINE INDOOR CEILING HINGE RANGE WITH SWIVEL


MECHANISM DIMENSIONS - OPEN

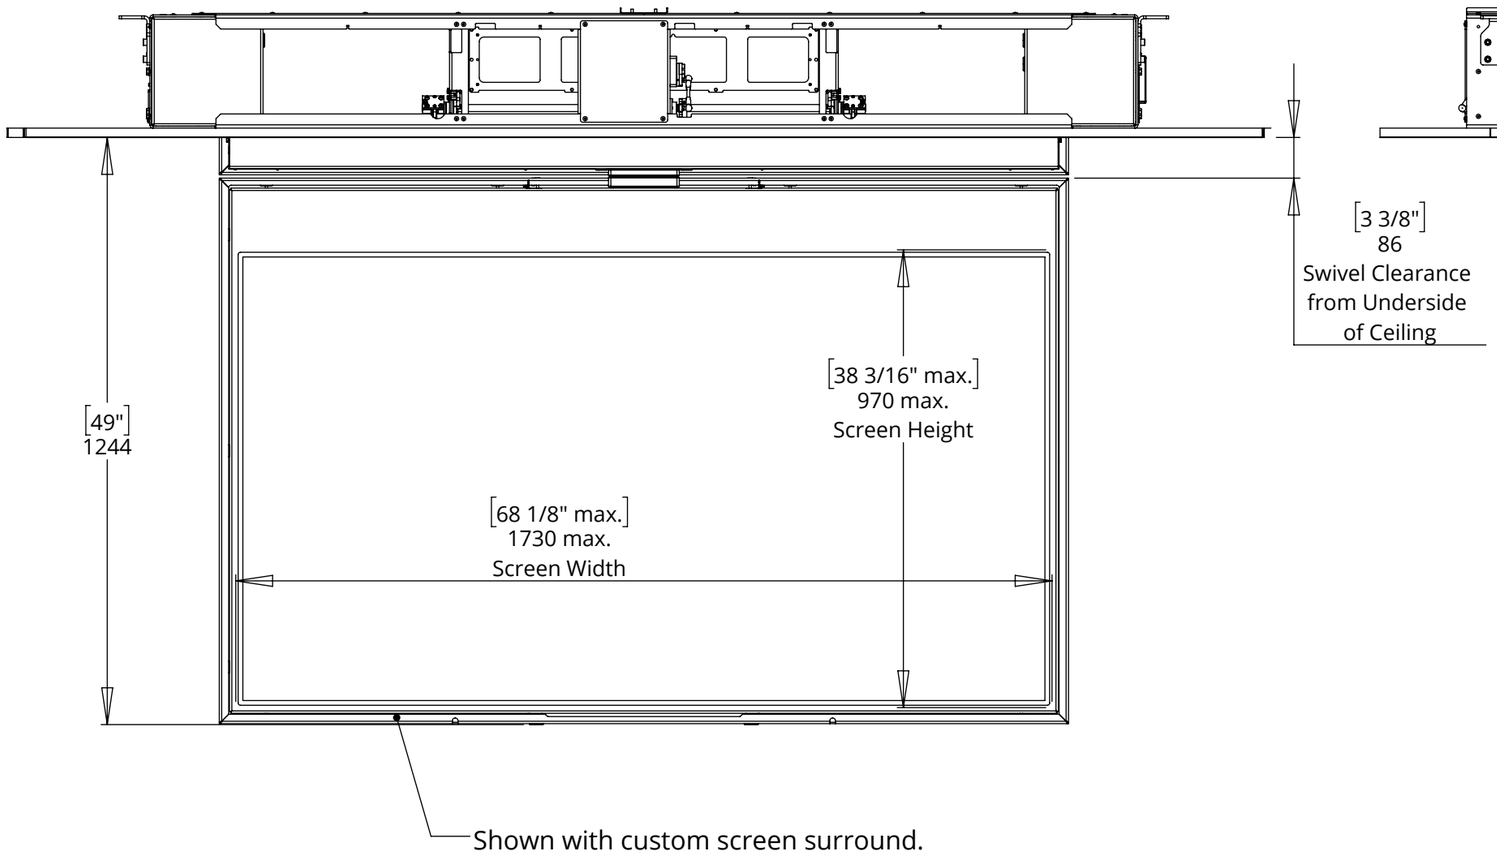

Shown with custom screen surround.

Supplied at request, screen details required at point of order.

Screen surround overlaps screen on all edges by 5mm as standard. If required this can be customised to suit.

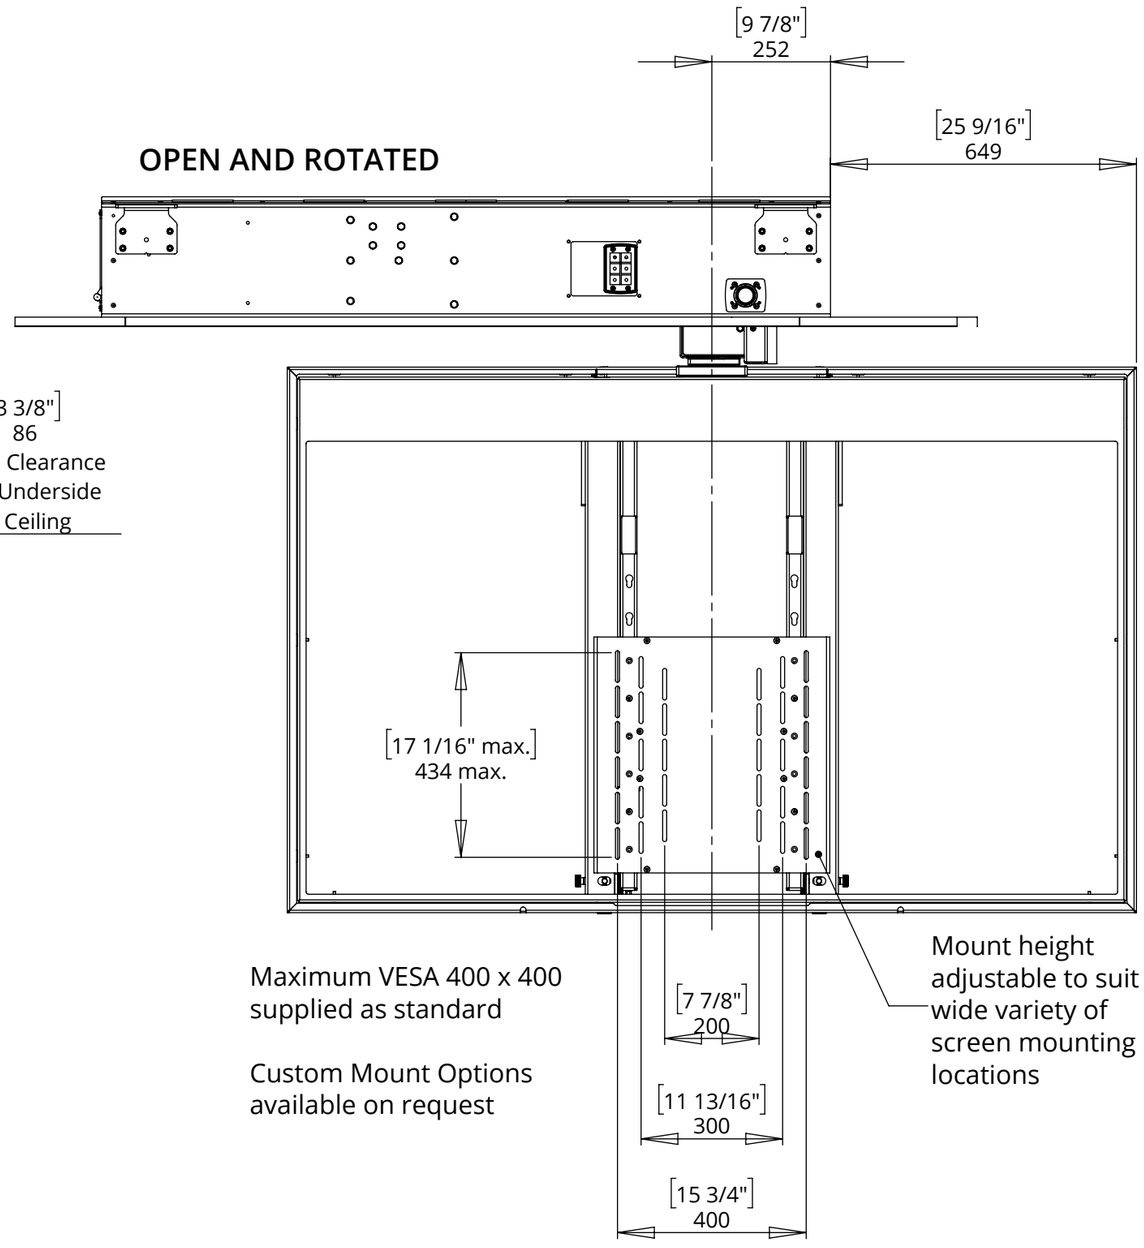

Maximum VESA 400 x 400 supplied as standard

Custom Mount Options available on request

Mount height adjustable to suit wide variety of screen mounting locations