
MDM-H-T915
MOVING DOOR MECHANISM WITH CLUTCH

future automation

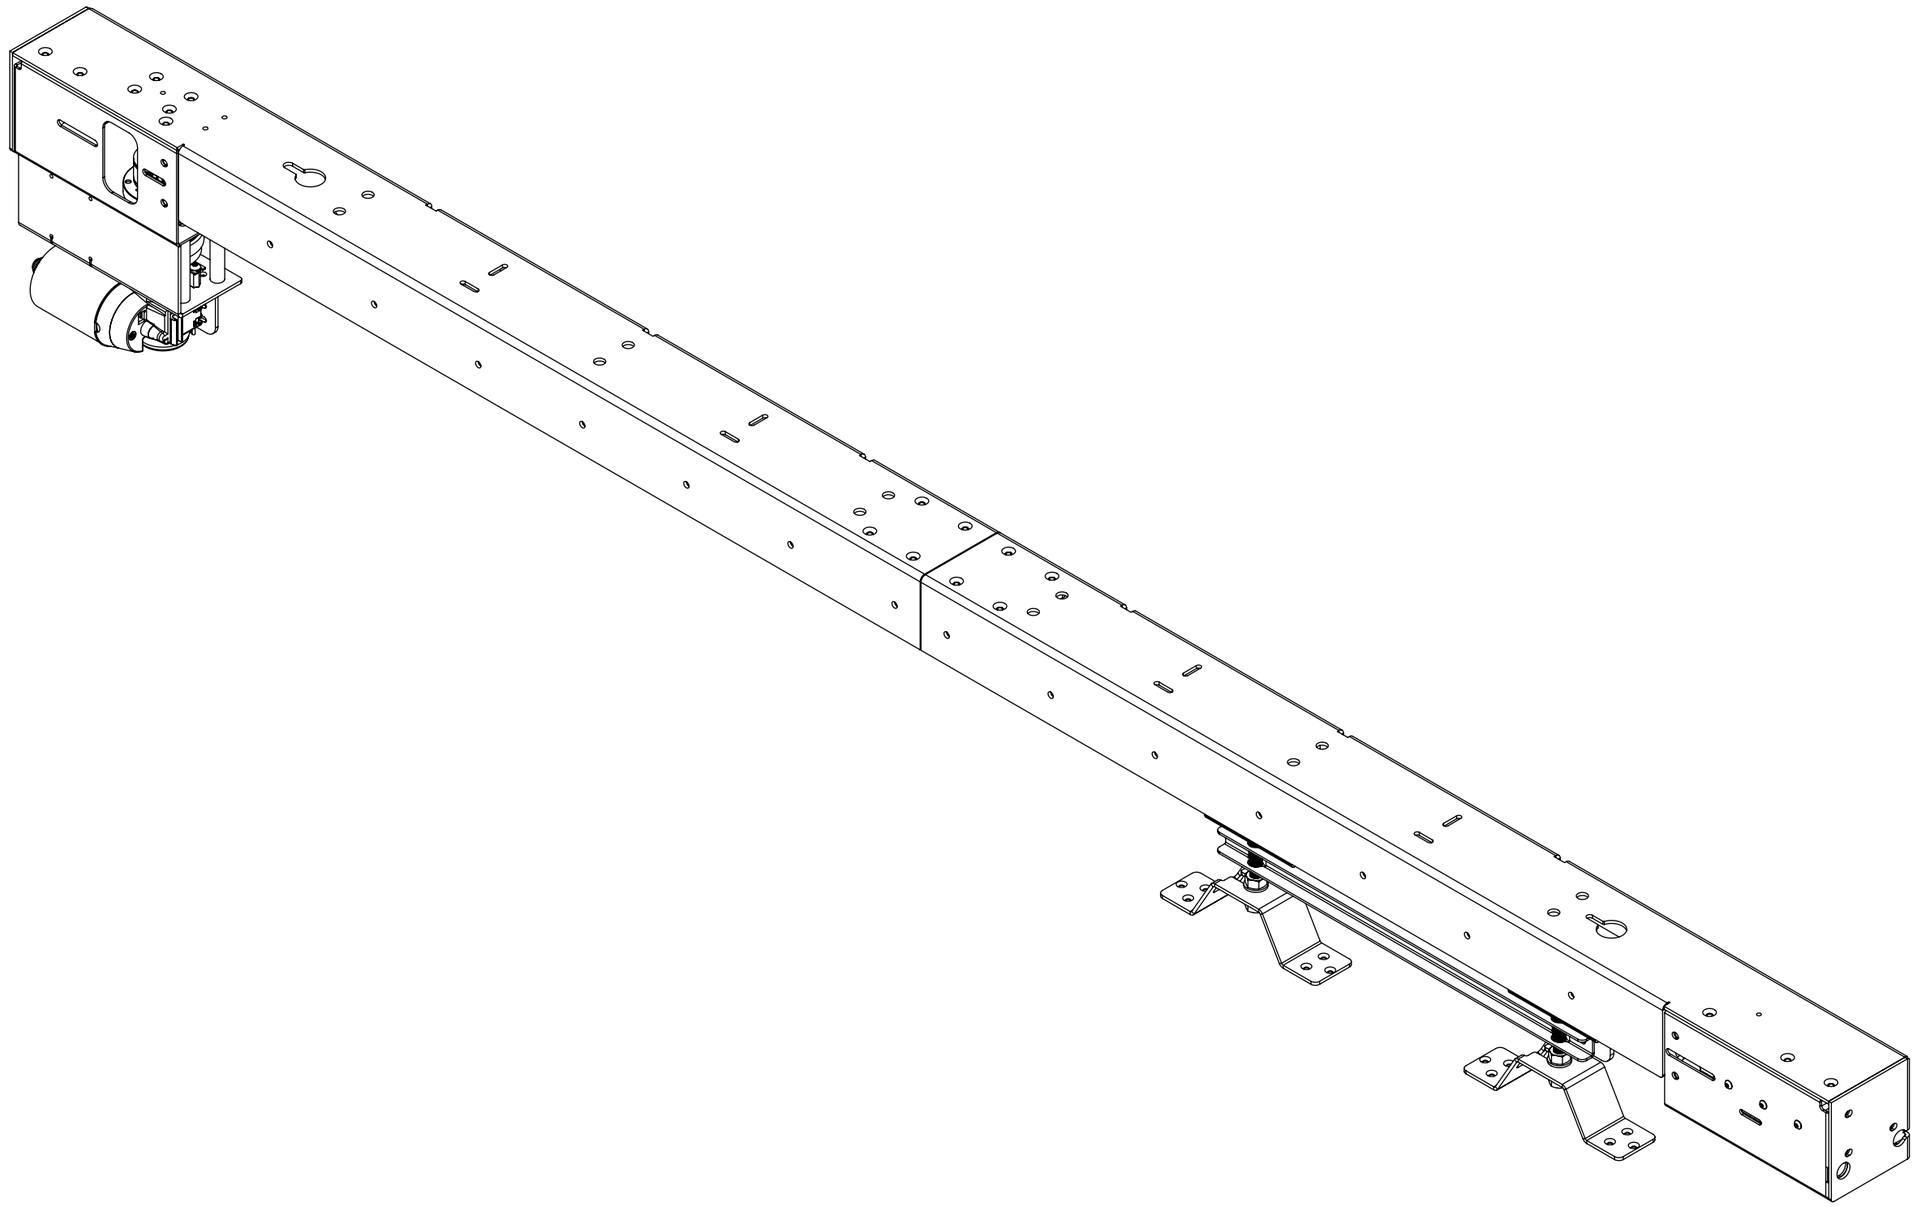


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 001
SHEET 1


MDM-H-T915
MOVING DOOR MECHANISM WITH CLUTCH

GENERAL DIMENSIONS


MDM is fixed from underneath through the mounting holes shown

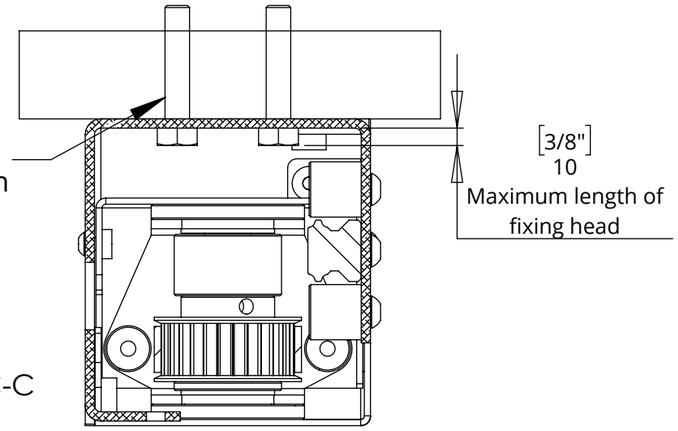


SECTION C-C

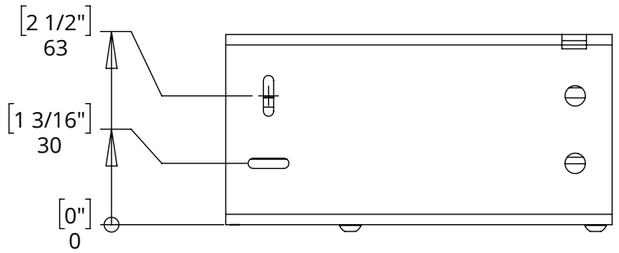

DETAIL B

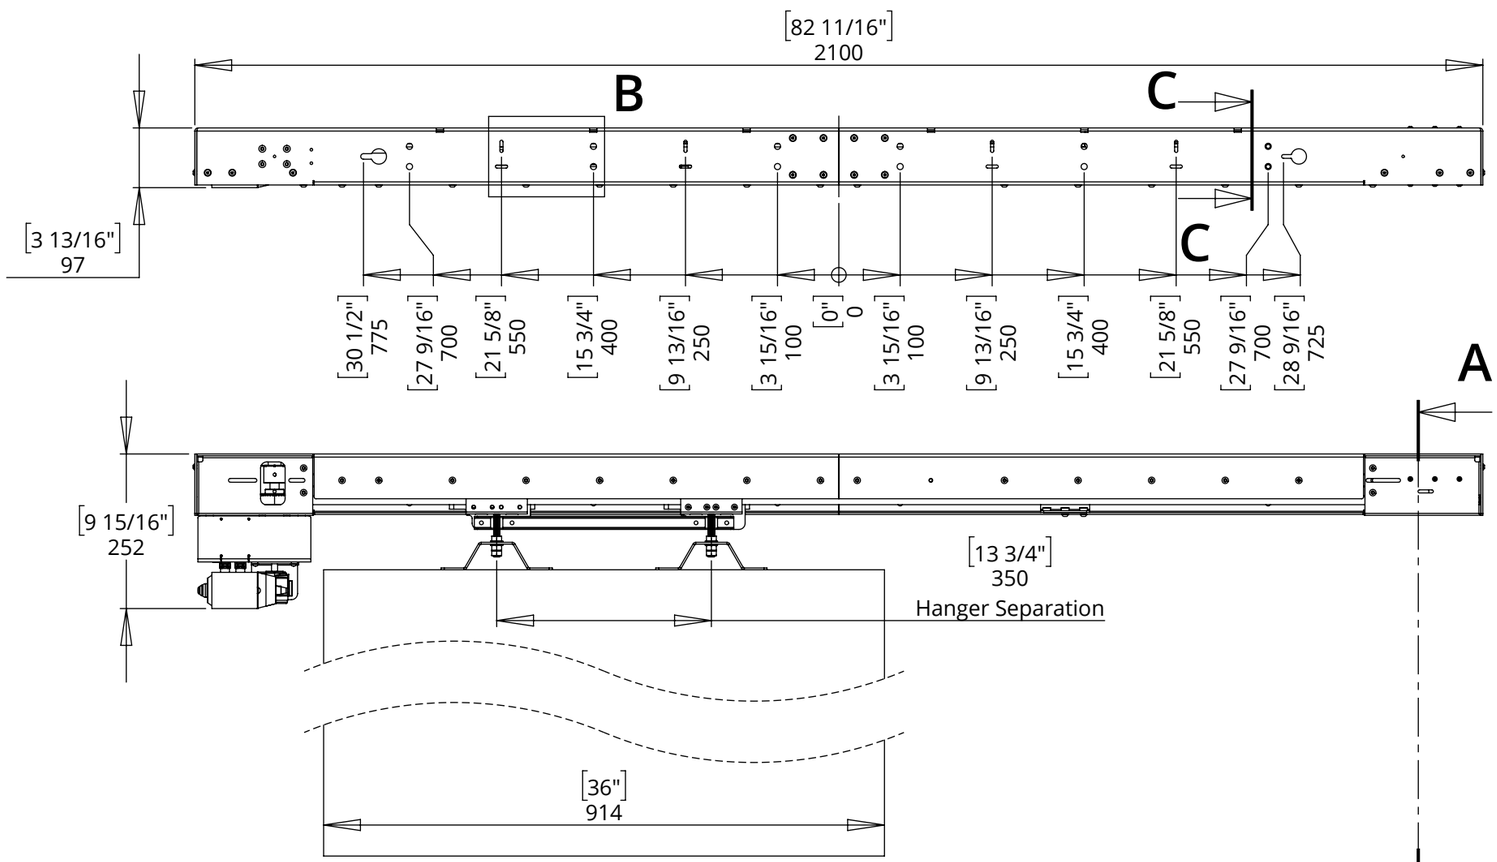

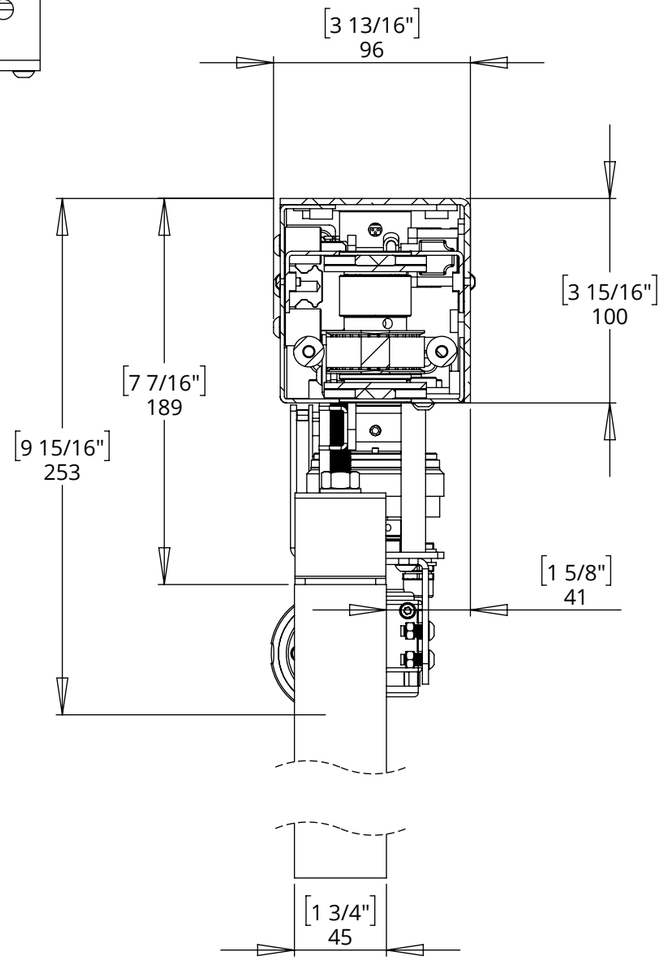

SECTION A-A

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 001
SHEET 2

MDM-H-T915
MOVING DOOR MECHANISM WITH CLUTCH

future automation

PANEL DIMENSIONS

OPEN POSITION

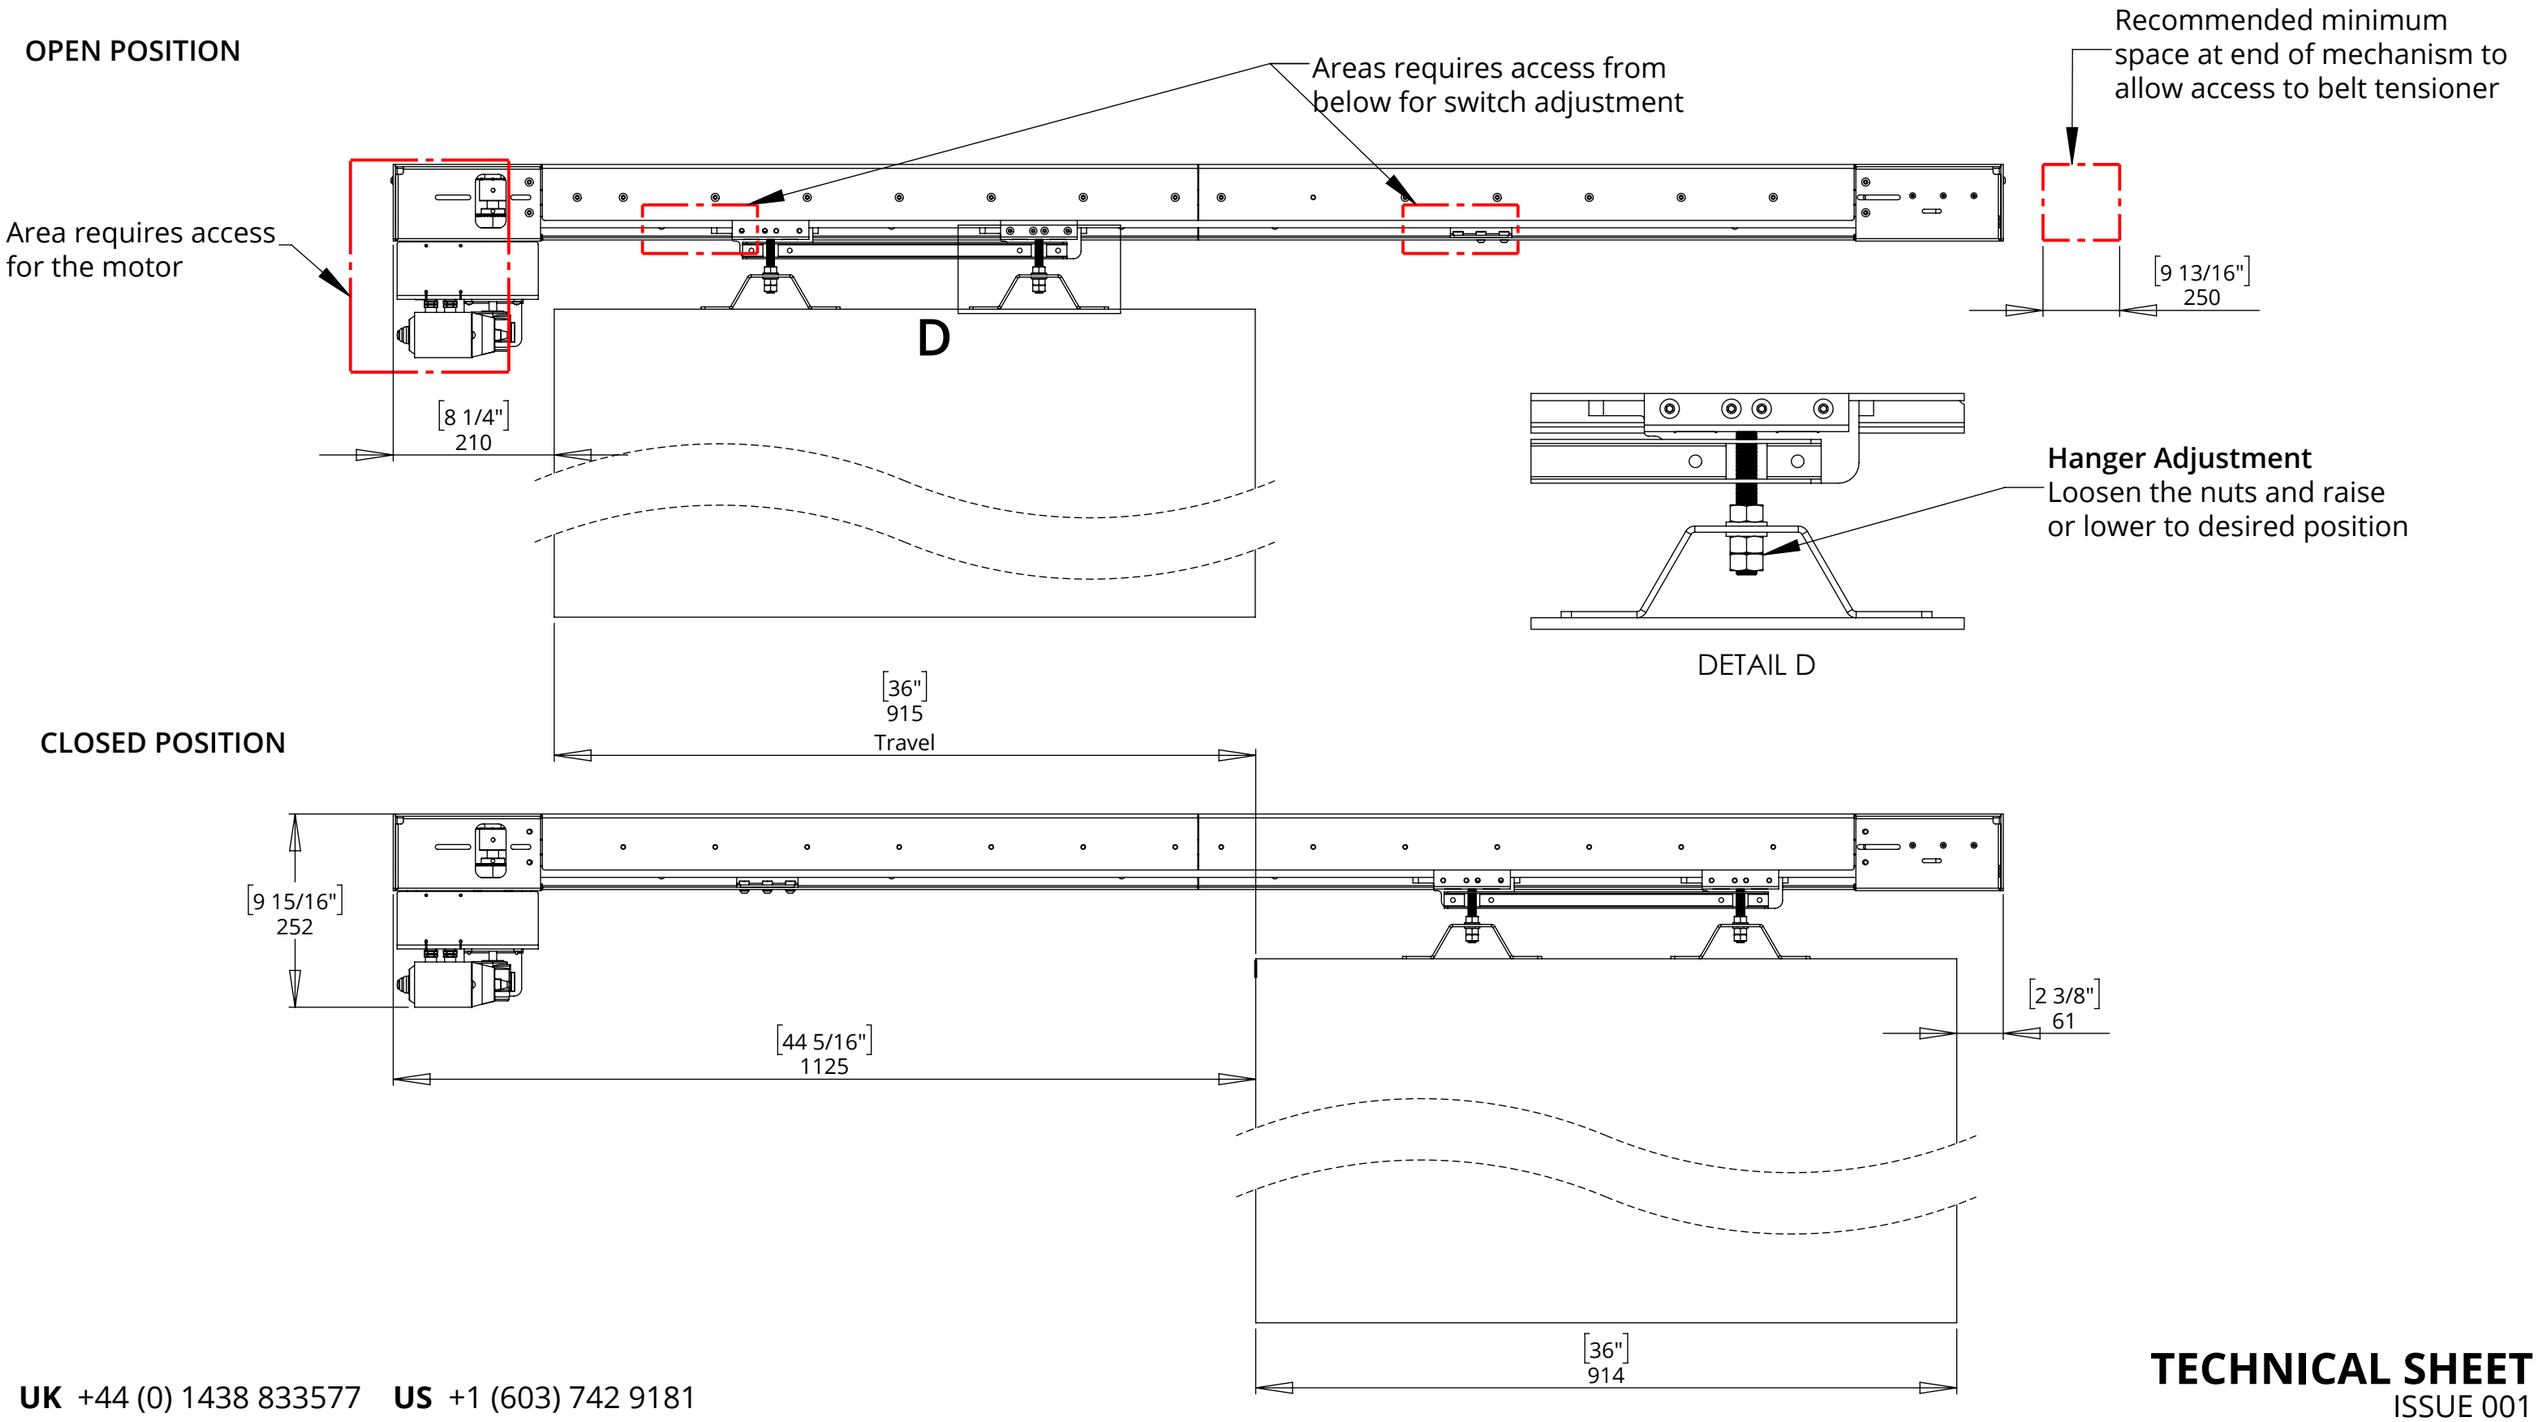


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 001
SHEET 3


MDM-H-T915
MOVING DOOR MECHANISM WITH CLUTCH

SWITCH ADJUSTMENT

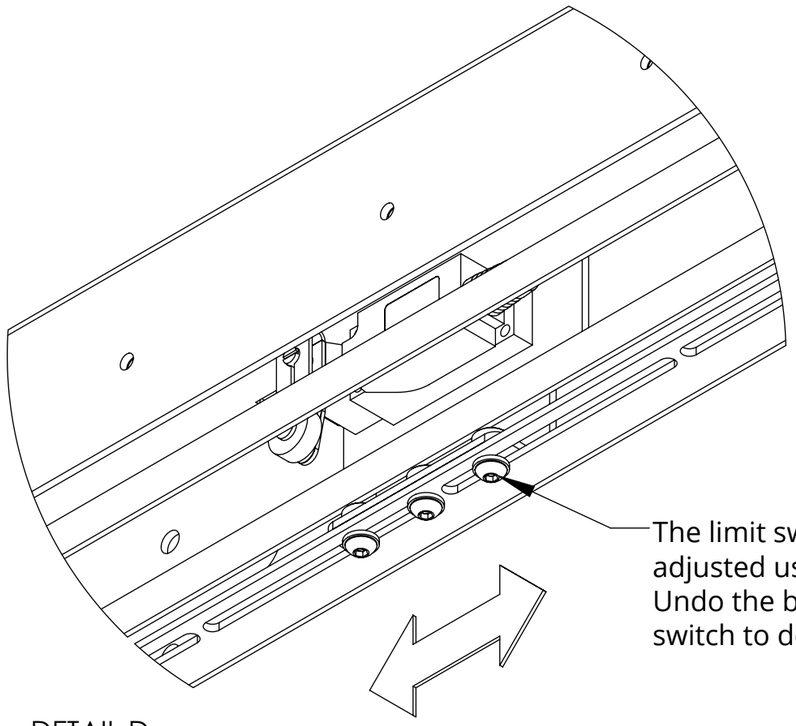

The limit switches can be adjusted using a allen key. Undo the bolts and slide switch to desired position.

DETAIL D

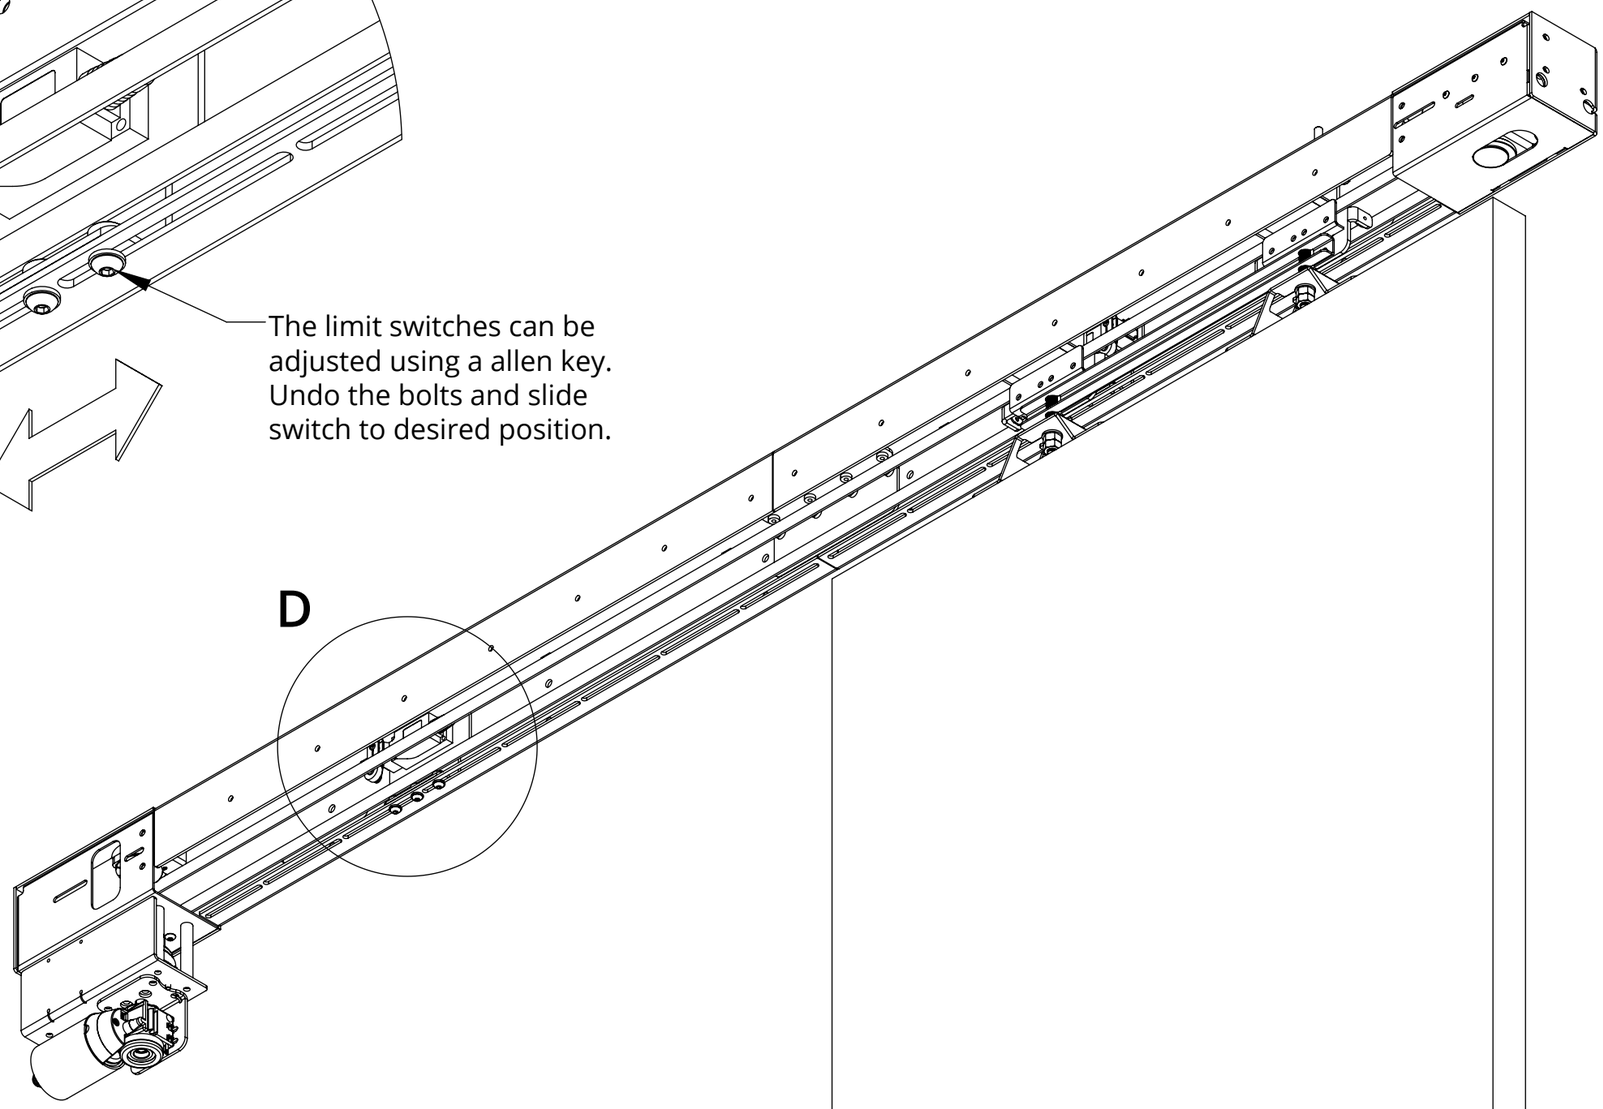



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 001
SHEET 4

MDM-H-T915
MOVING DOOR MECHANISM WITH CLUTCH

future automation

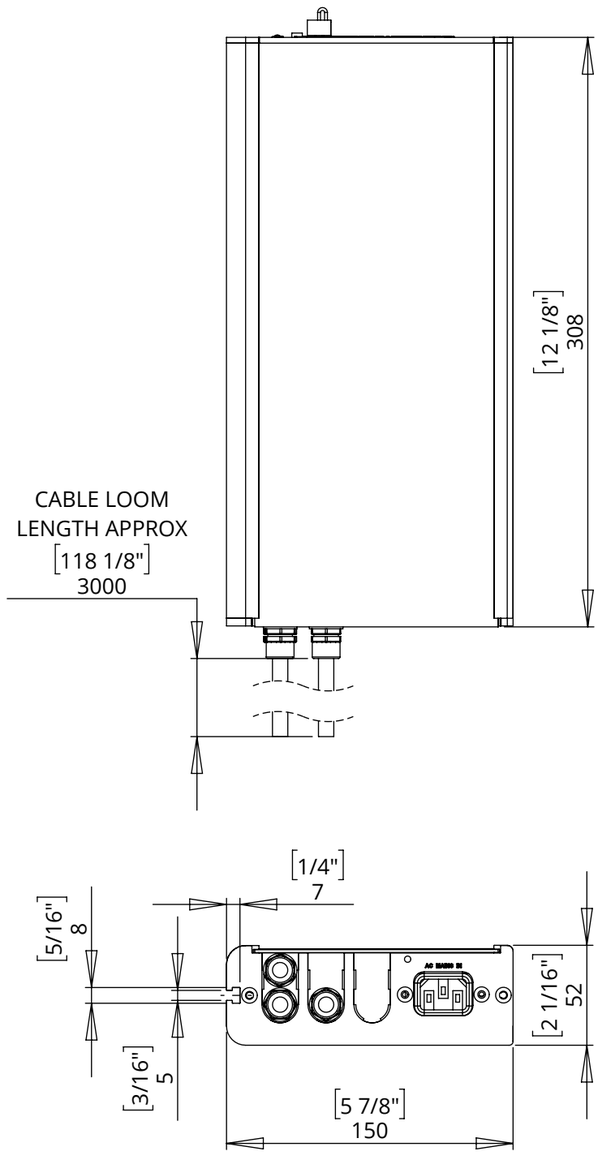

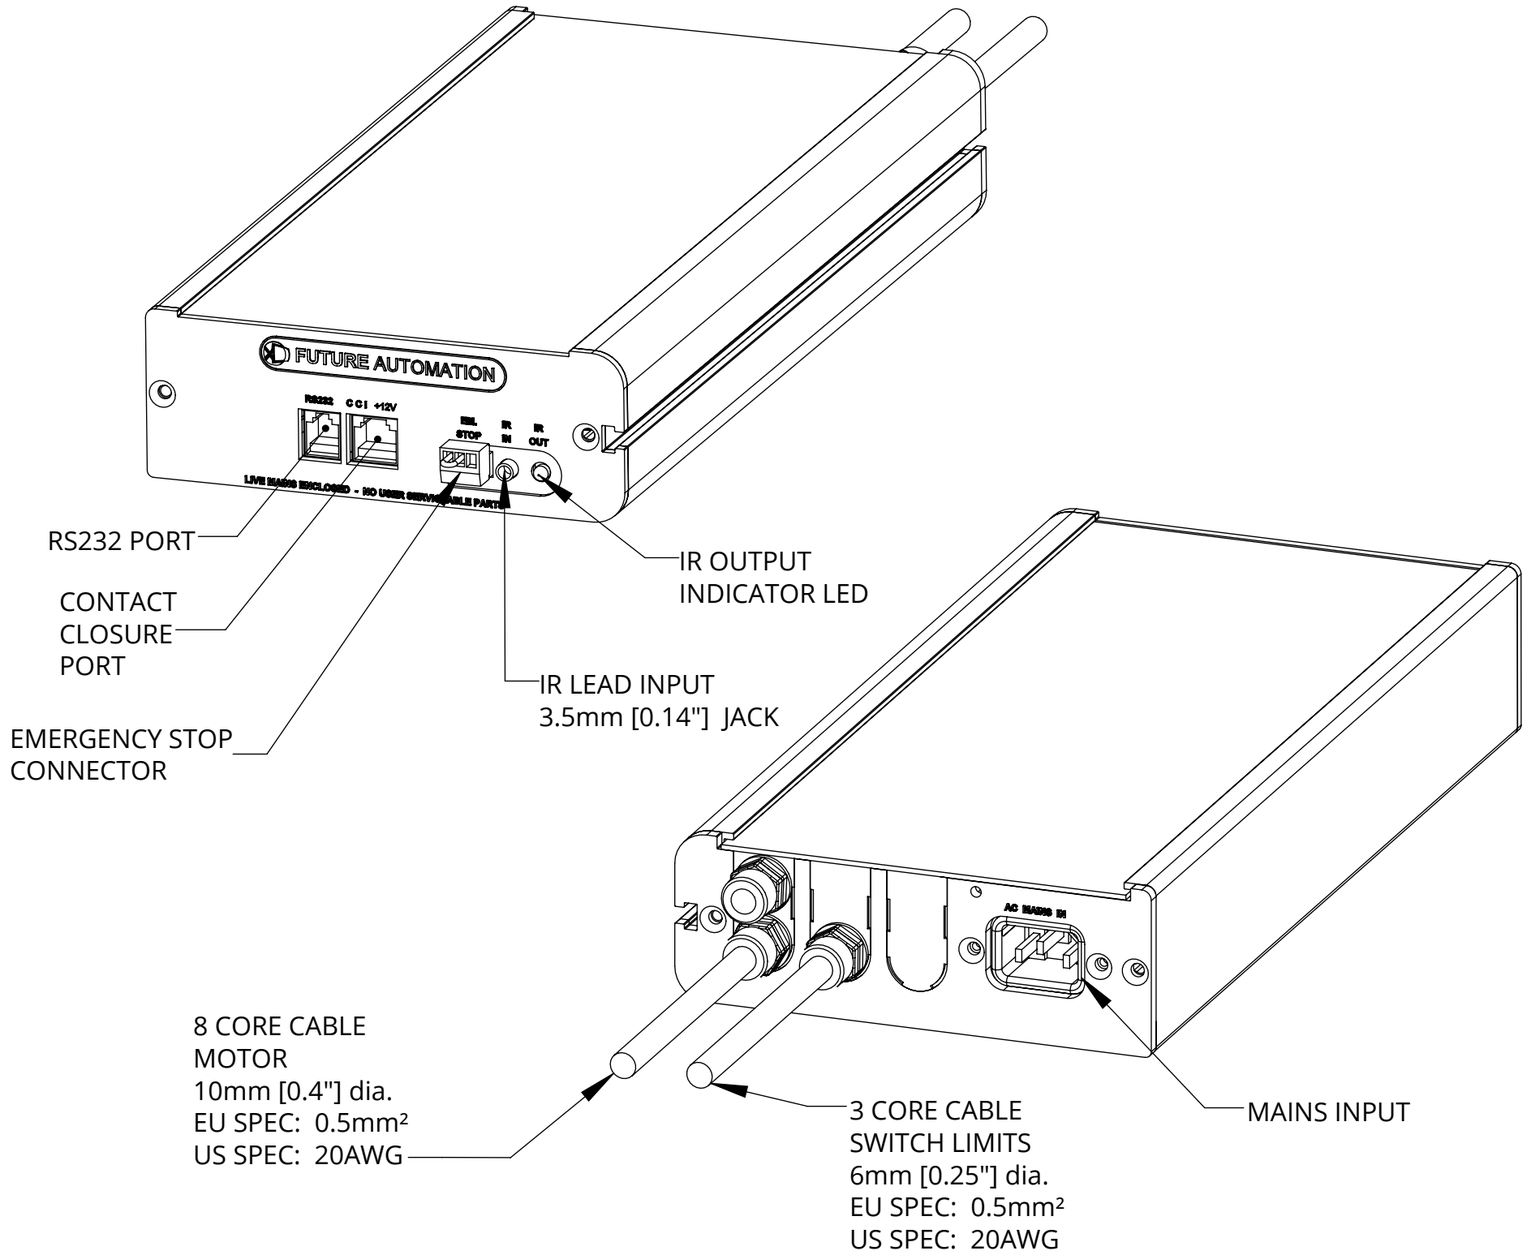

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 001
SHEET 5