



# PDR-BRG
## PROJECTOR DROP FOR BARCO BRAGI

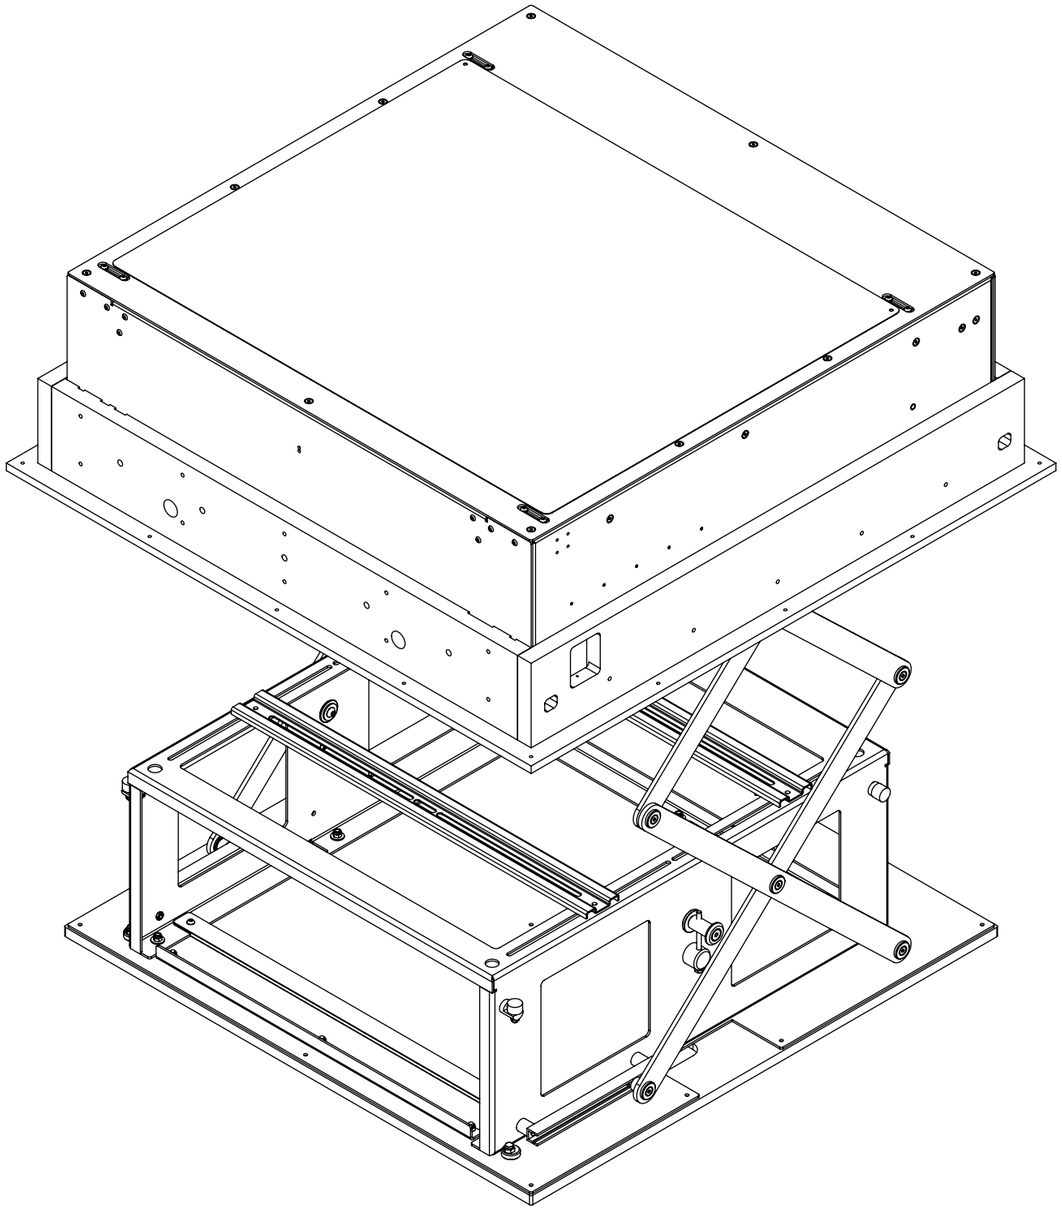

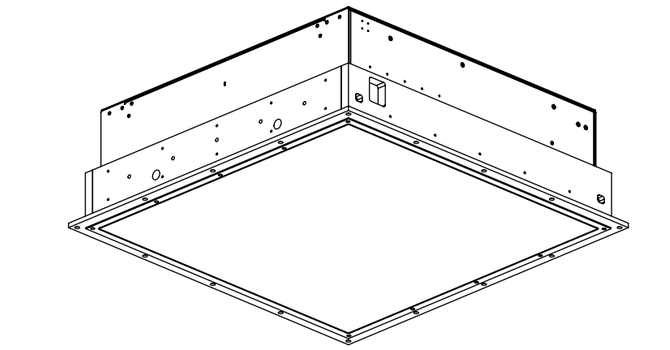

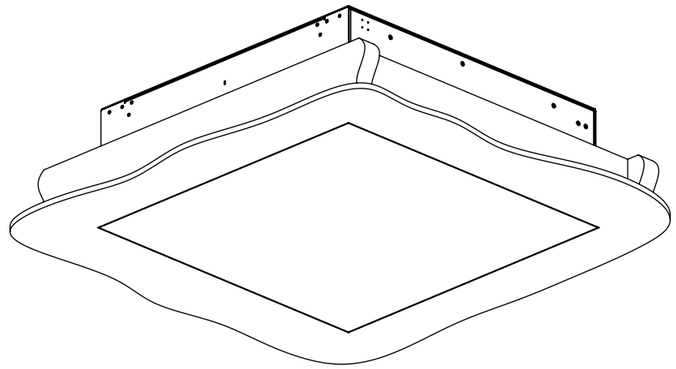

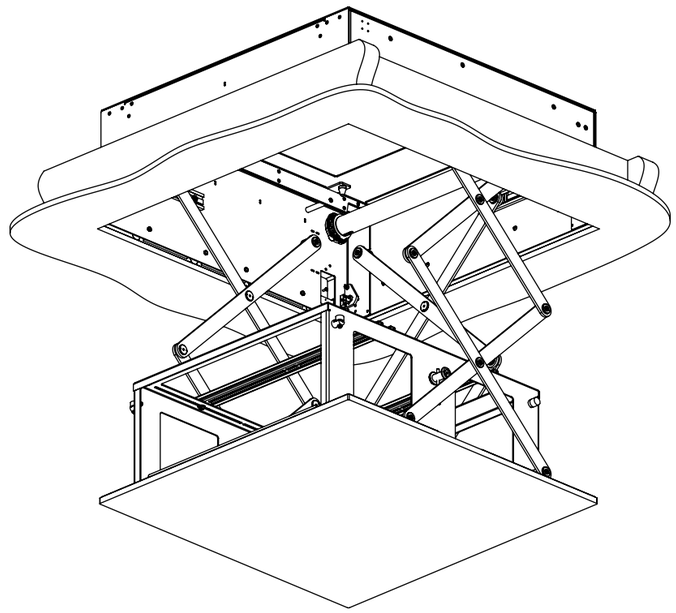

**UK** +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

**TECHNICAL SHEET**
ISSUE 004
SHEET 1

# PDR-BRG
## PROJECTOR DROP FOR BARCO BRAGI

future automation

| SPECIFICATION | MEASUREMENTS |
|---|---|
| Product Dimensions | 968mm (38 1/8") W x 968mm (38 1/8") L x 320mm (12 5/8") H |
| Recommended Maximum Projector Dimensions | 560mm (22 1/16") W x 650mm (25 9/16") L x 260mm (10 1/4") H |
| Maximum Projector Weight Capacity | 45Kg (99lb) |
| Supplied MDF Infill Panel Weight | 5Kg (11lb) |
| Maximum Speed | 50mm/s |
| Maximum Travel From Finished Ceiling Level | 740mm (29 1/8") - Standard<br>1200mm (47 1/4") - Available |
| Height from Finished Ceiling Level | 320mm (12 5/8") |
| Product Weight | 56Kg (124lb) |
| | |
| Packaging Dimensions | TBC |
| Shipping Weight | TBC |
| | |
| Movement Type | Motorised |
| Power Supply Required | 110V - 240V AC |
| Power Consumption Max. | 120W |
| Power Consumption Standby | 3W |
| | |
| Control Options | IR Remote, RS232, Contact Closure |
| Product Options / Features | Specific mounts / adapters, Custom RAL paint finishes |
| Package Contents | Mechanism, MDF Pre-install Ceiling Cassette, IR remote control |

# PDR-BRG
# PROJECTOR DROP FOR BARCO BRAGI

future automation

## DESIGN HIGHLIGHTS

Flush in ceiling finish with 3mm [1/8"] shadow gap around panel.

Spring catches aid a quick and simple mechanism installation.

Available with two different drop options. Standard drop is 740mm [29 1/8"] and Long Drop is 1200mm[47 1/4"]


Full cable management keeps all power and signal cables as neat and tidy as possible.


Top cover panel finishes internal void in matching white satin finish.


Slotted mounting system provides easily adjustable installation for almost any projector.


Standard control box can also control a third party product such as a projector screen.

VIEWS BELOW SHOW ACTION FROM IN POSITION TO DOWN POSITION

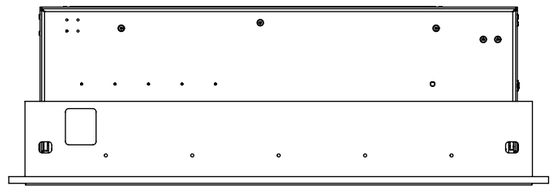

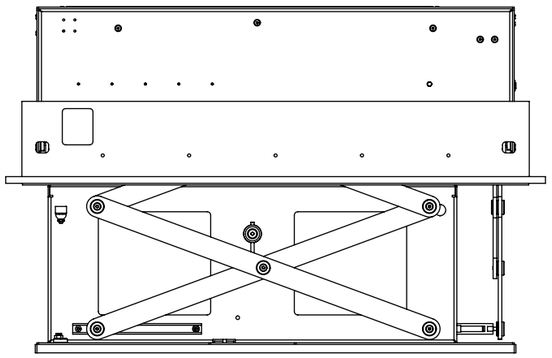

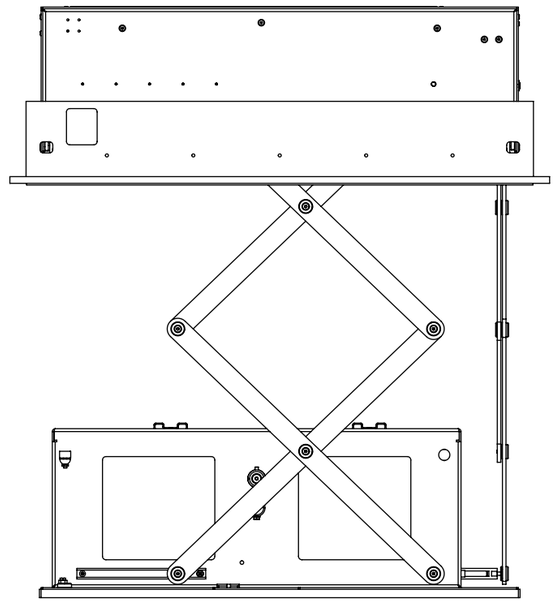

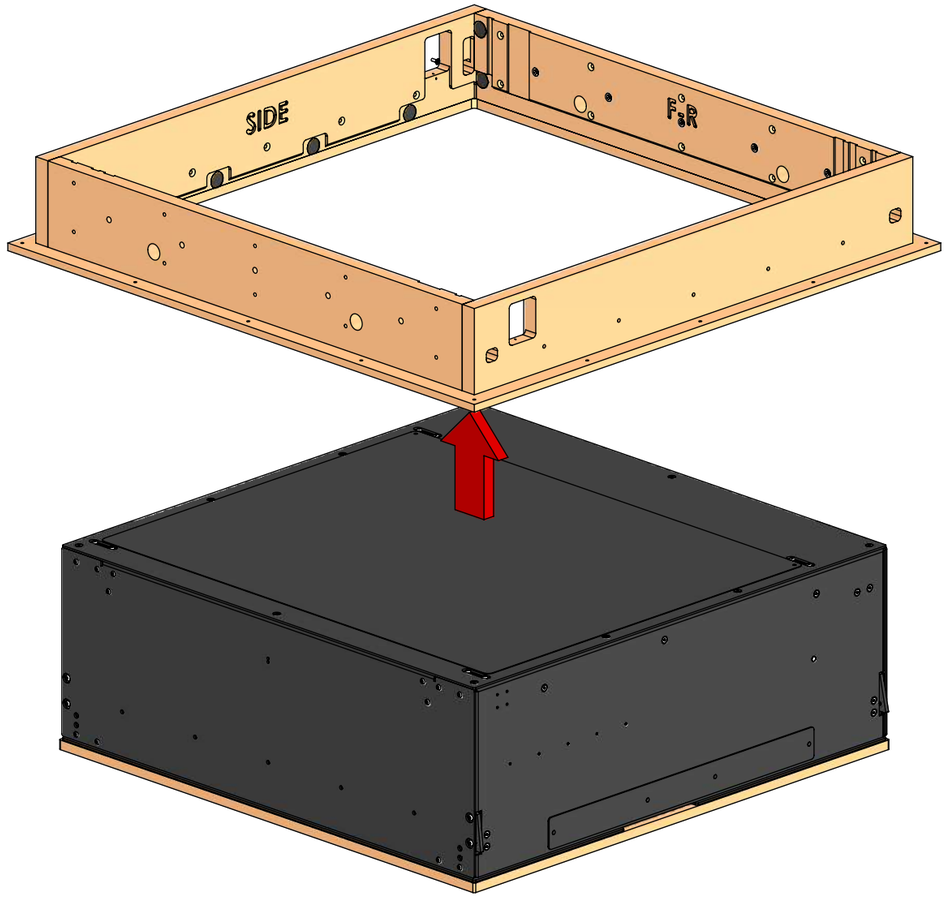



**For quick and simple install, mechanism easily clicks into supplied pre-install framework.**


**UK** +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


**TECHNICAL SHEET**
ISSUE 004
SHEET 3


# PDR-BRG
# PROJECTOR DROP FOR BARCO BRAGI

## FIXING TO WOODEN BEAMS

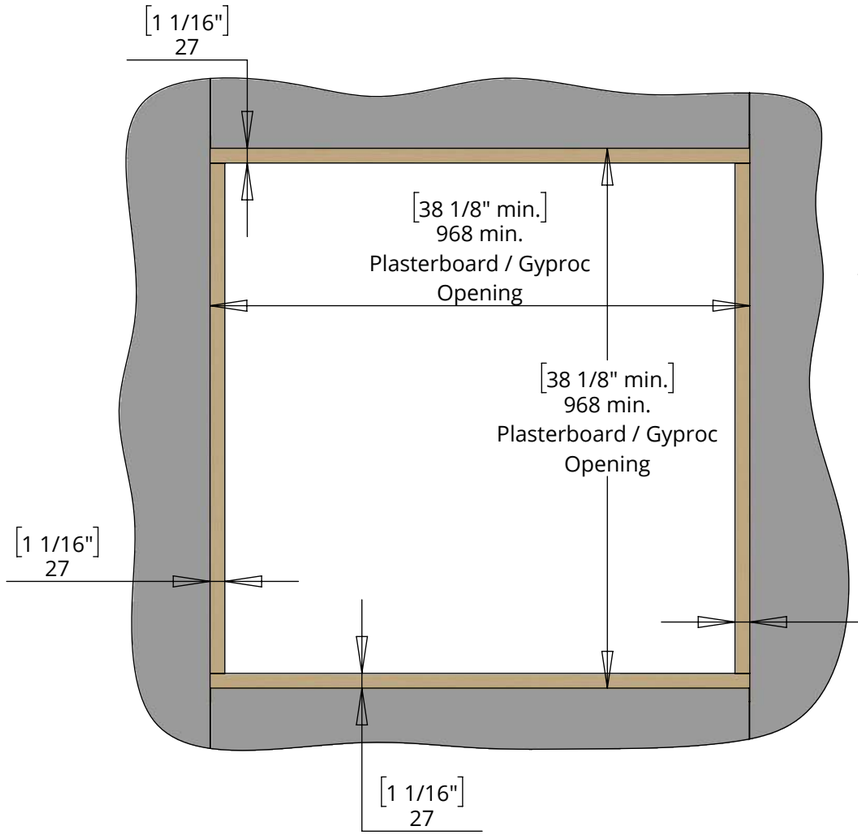

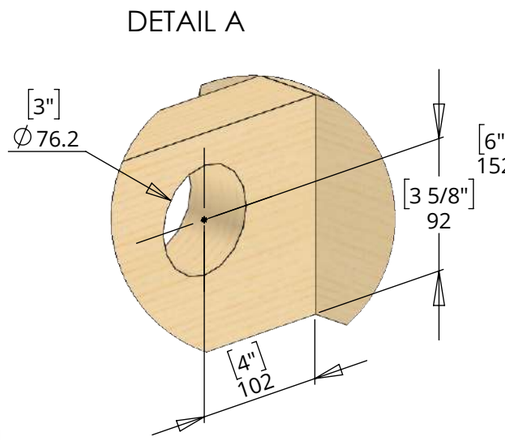

**UK** +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

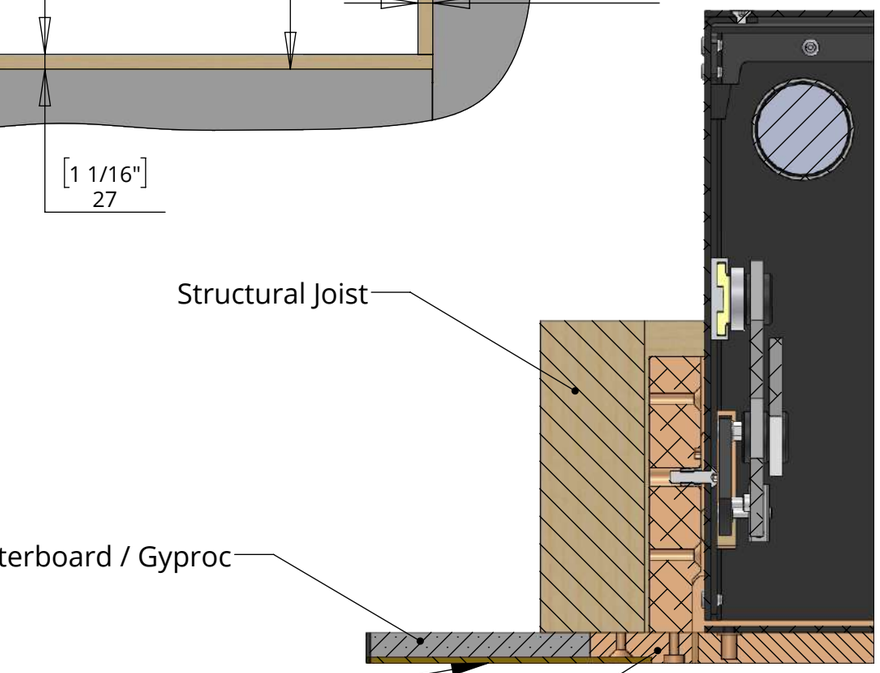**TECHNICAL SHEET**
ISSUE 004
SHEET 4

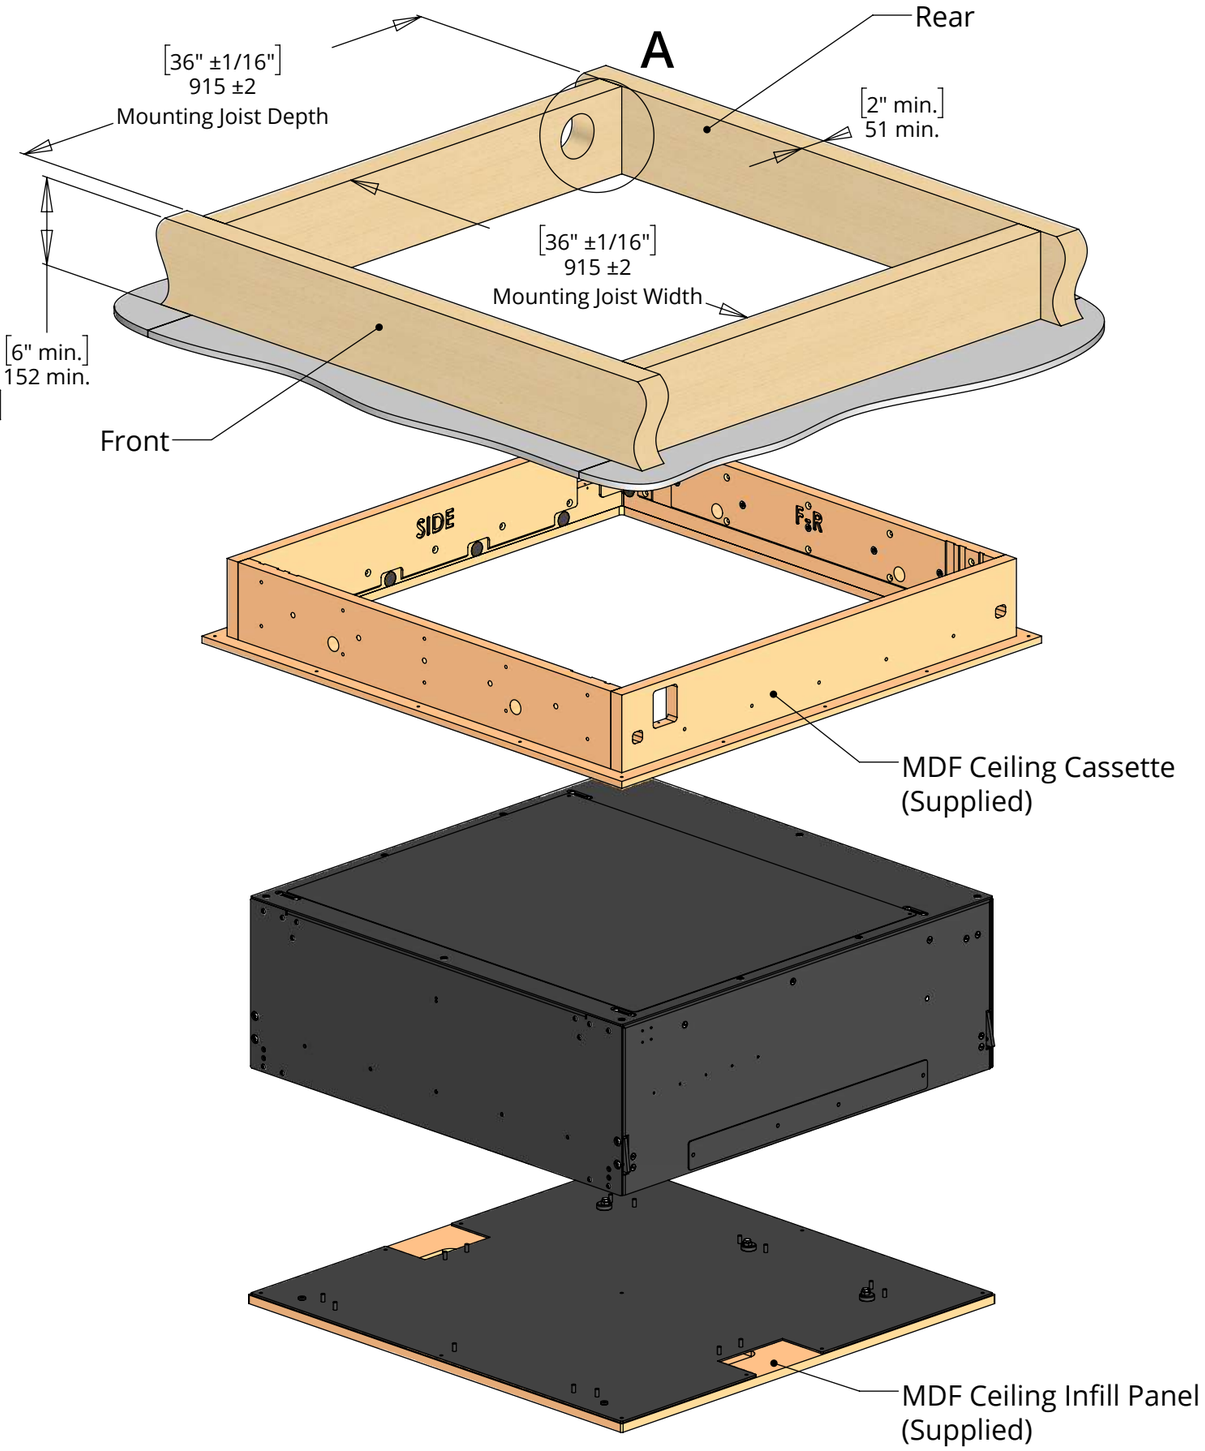
# PDR-BRG
# PROJECTOR DROP FOR BARCO BRAGI


## INSTALLATION PROCEDURE

### 1. Install MDF Ceiling Cassette

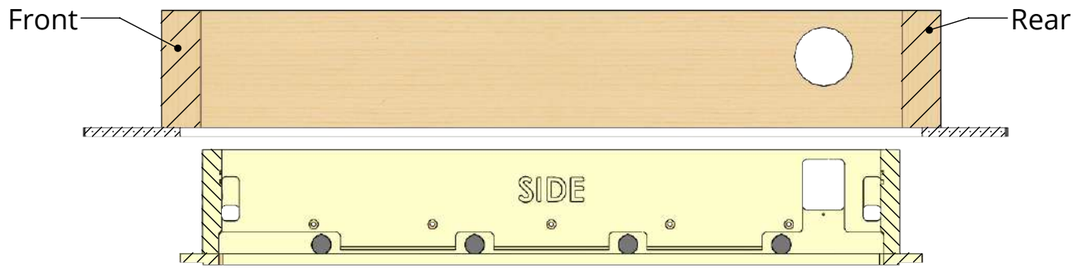



### 2. Prepare Cabling

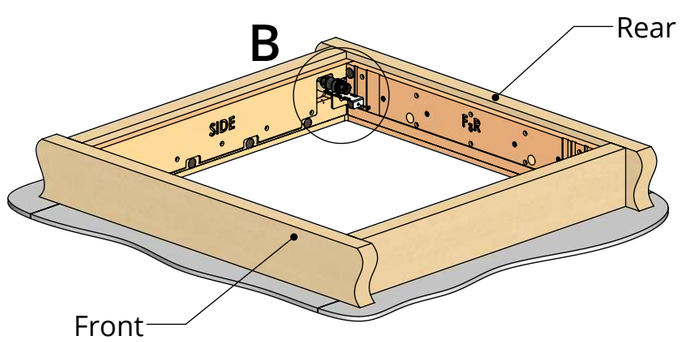


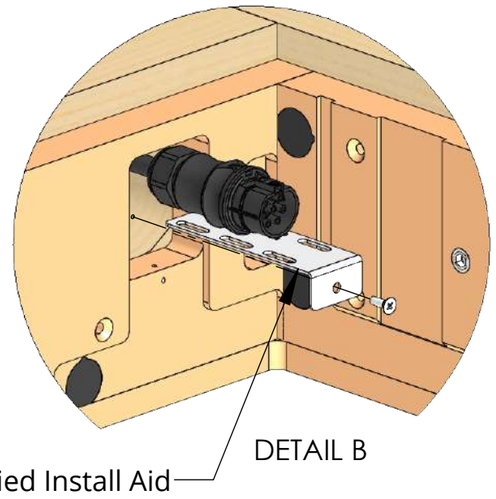
### 3. Install Mechanism

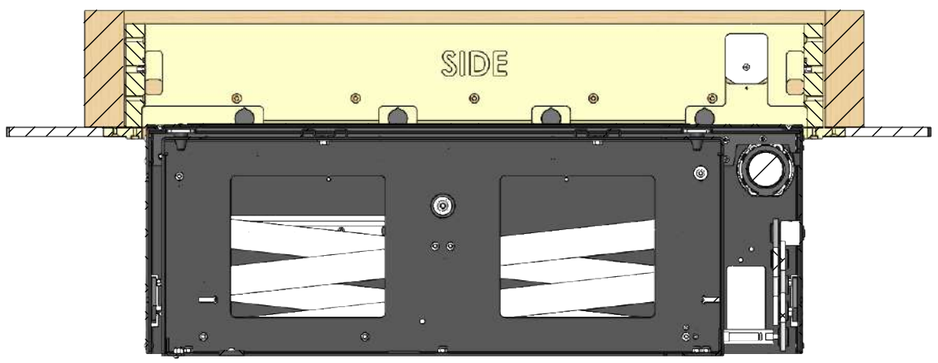



### 4. Plastering

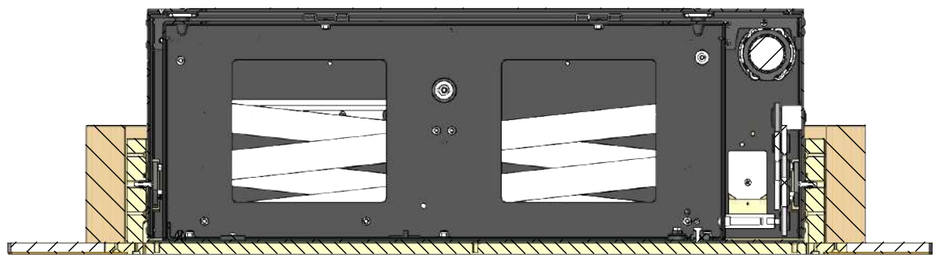


# PDR-BRG
## PROJECTOR DROP FOR BARCO BRAGI

future automation


### MECHANISM DIMENSIONS

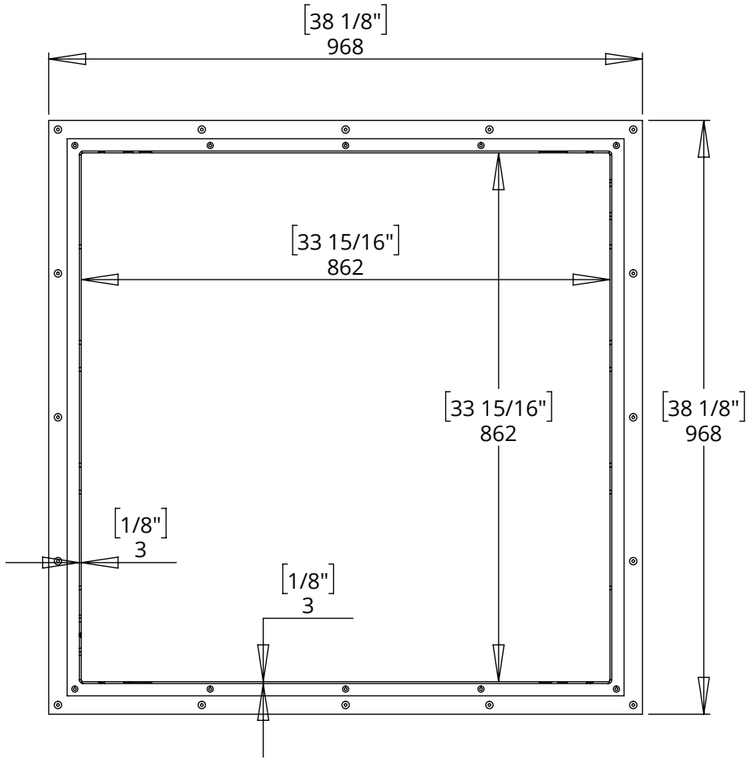

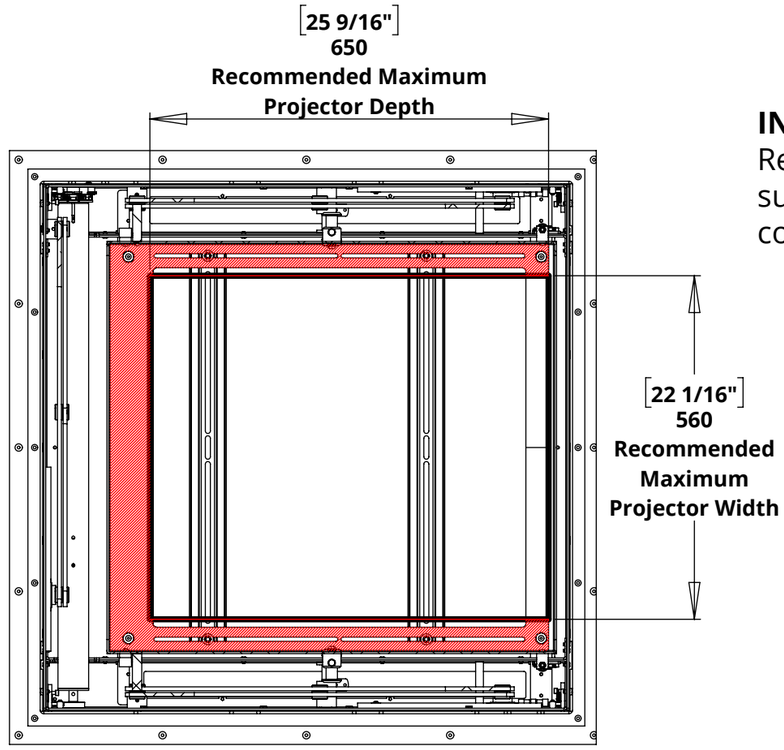



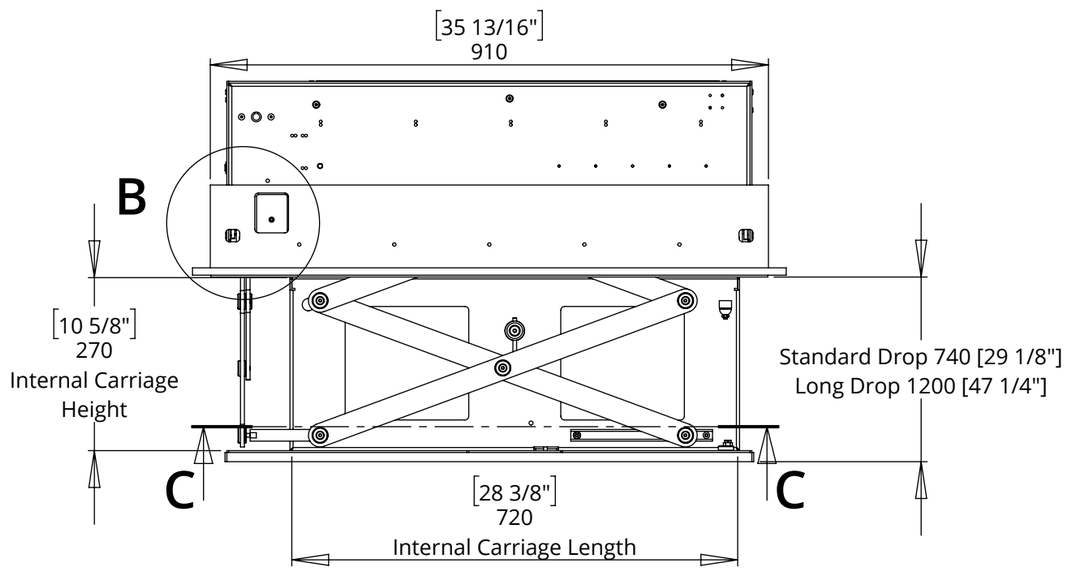

SECTION C-C

**INSTALLER DISCRETION:**
Red area highlighted to allow sufficient space for AV connections and ventilation.

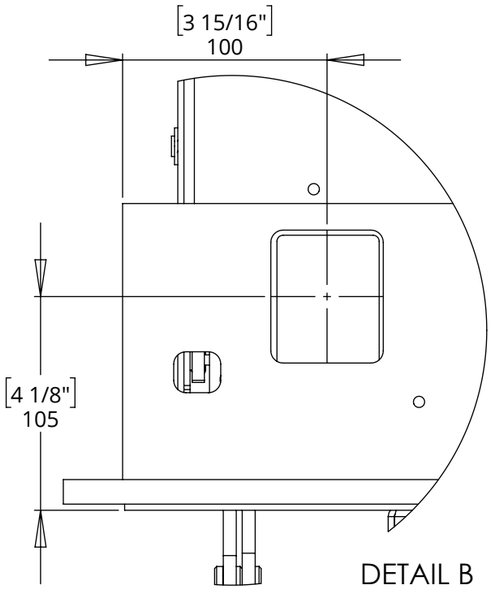


DETAIL B

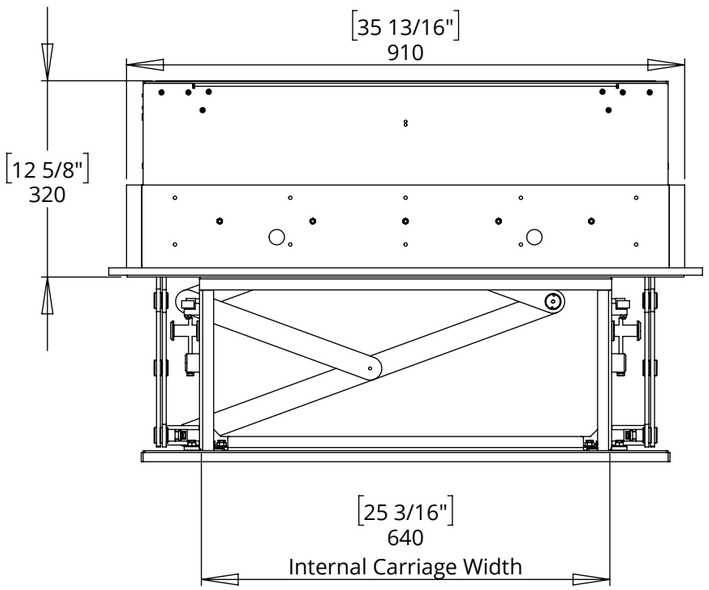





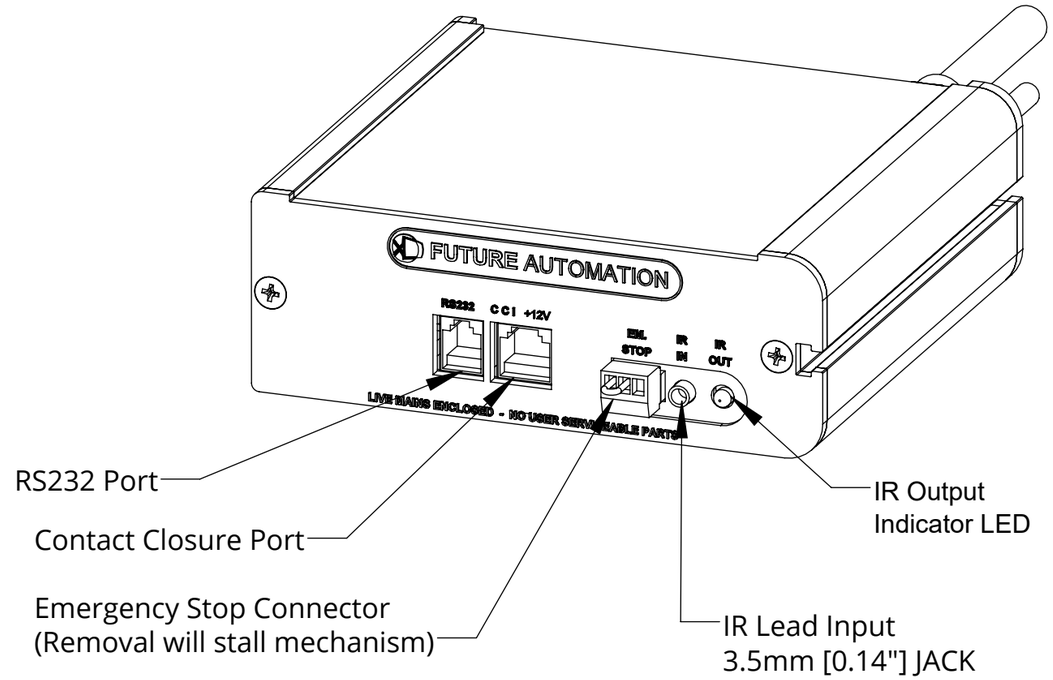

**UK** +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


**TECHNICAL SHEET**
ISSUE 004
SHEET 6

# PDR-BRG
## PROJECTOR DROP FOR BARCO BRAGI

### CONTROL BOX DETAILS

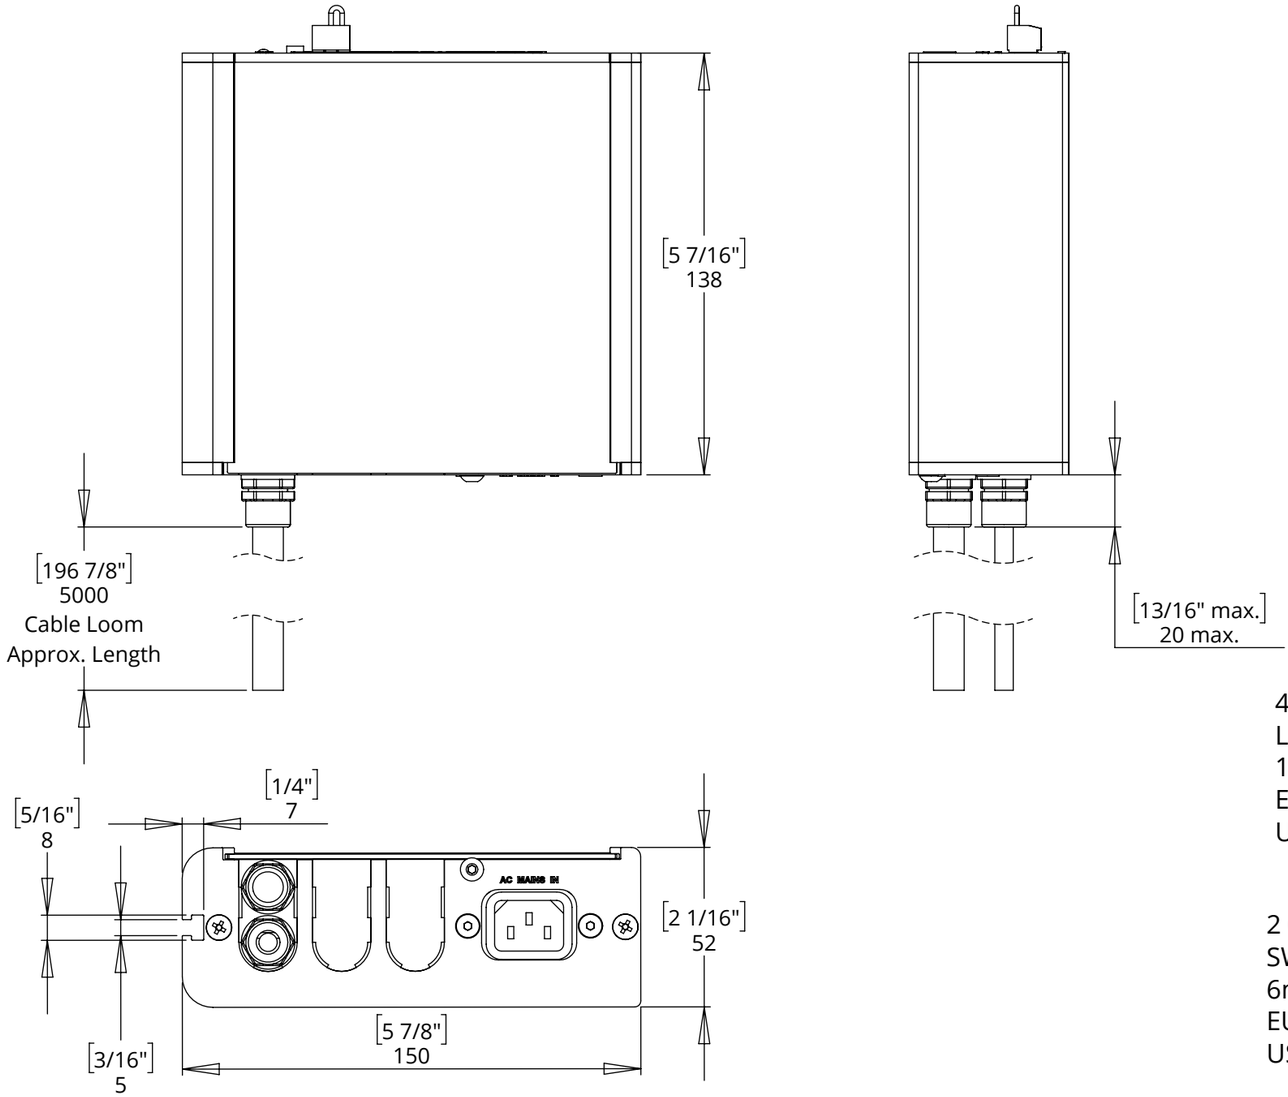


**NOTES**

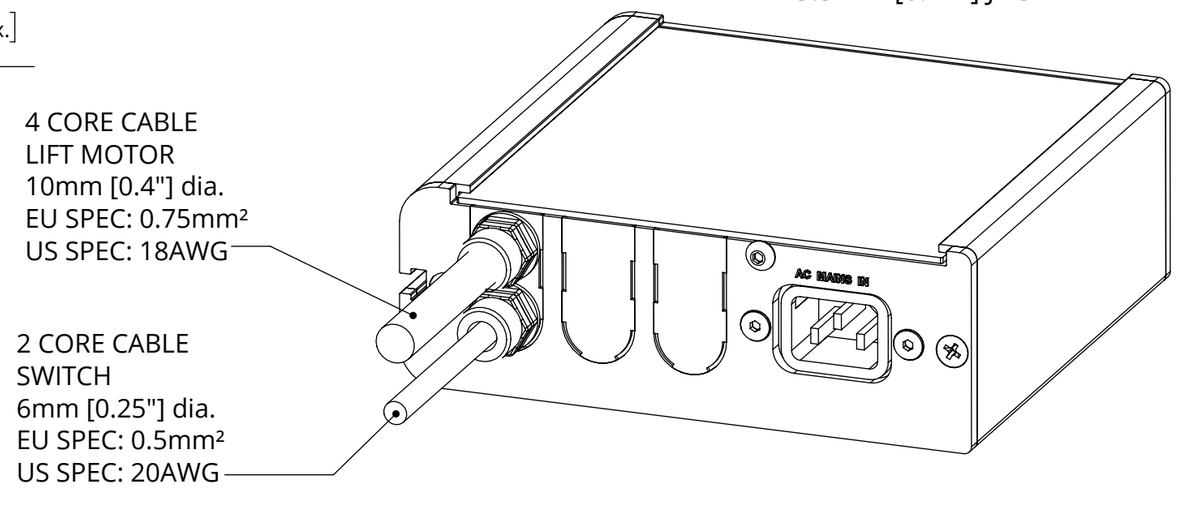- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 5m [196"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].