

PDR-GTZ380
PROJECTOR DROP RANGE

future automation

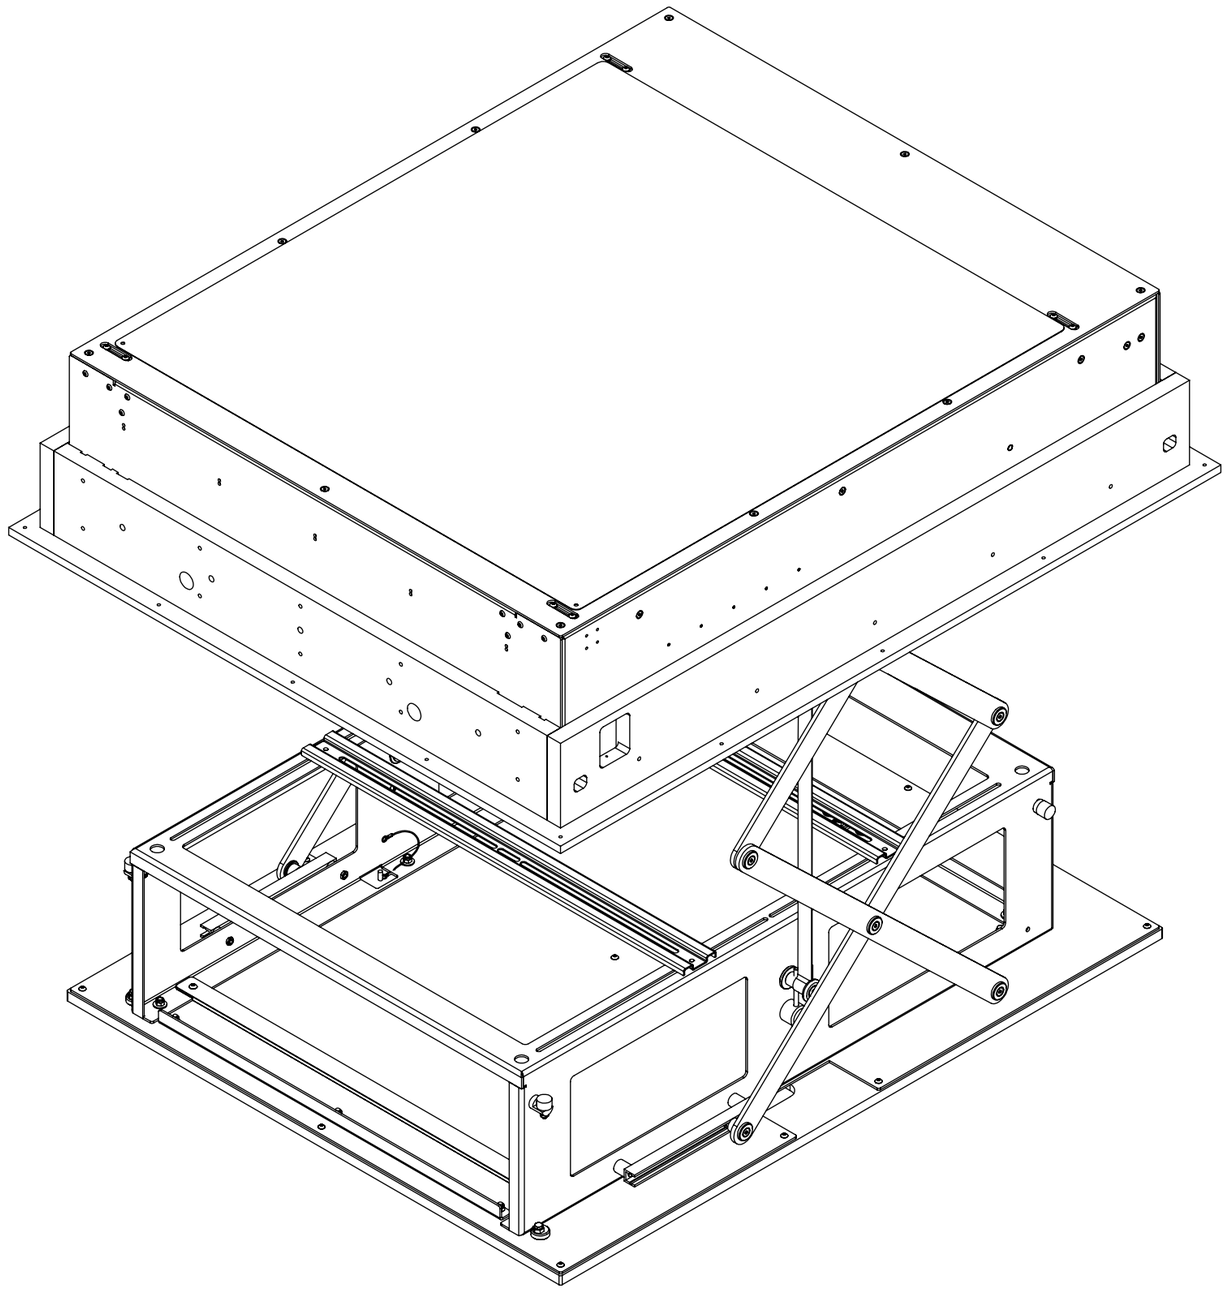

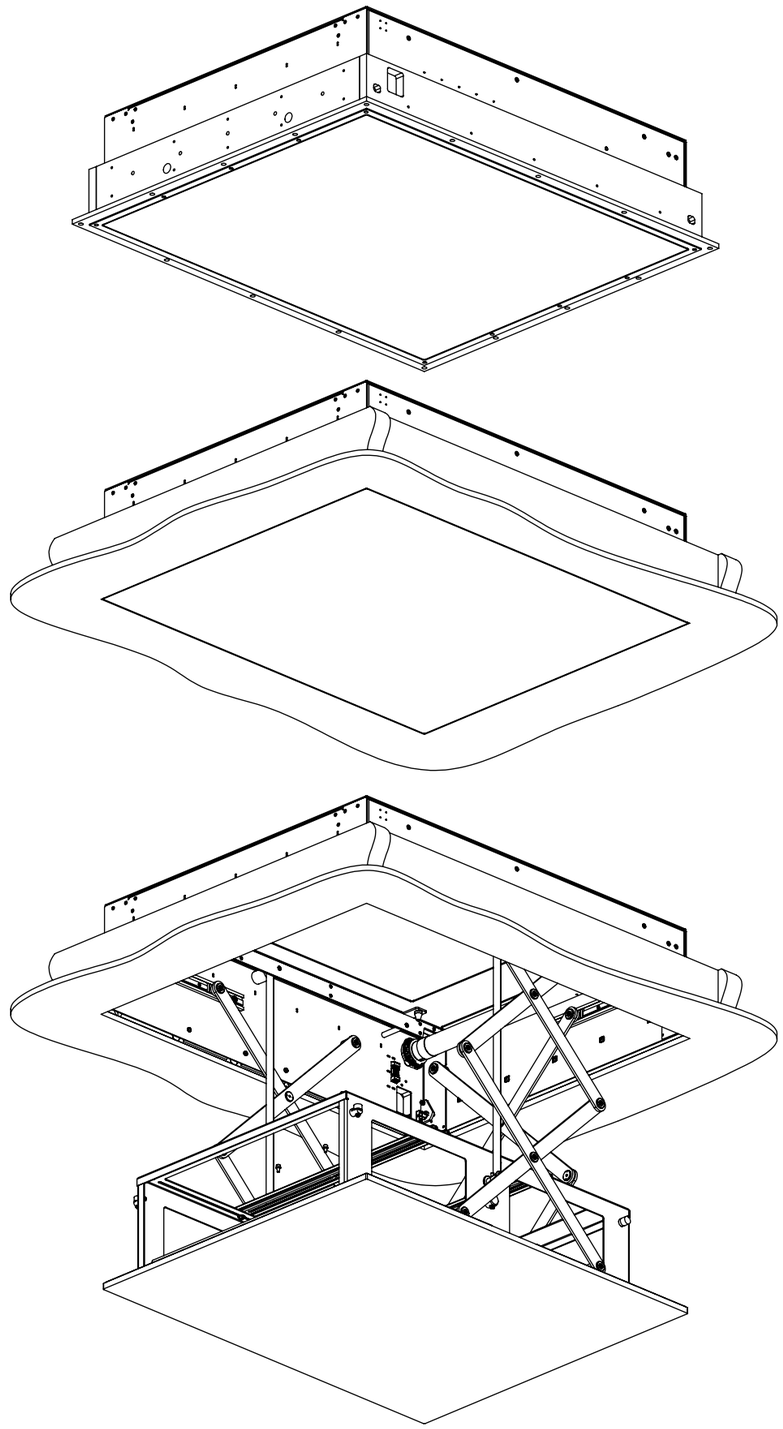

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 005
SHEET 1

PDR-GTZ380
PROJECTOR DROP RANGE

future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions	1018mm (40 1/16") W x 1218mm (47 15/16") L x 295mm (11 5/8") H
Maximum Projector Weight Capacity	55Kg (121lb)
Supplied MDF Infill Panel Weight	6.5Kg (14lb)
Maximum Speed	50mm/s
Maximum Travel From Finished Ceiling	740mm (29 1/8") - Standard 1200mm (47 1/4") - Available
Height from Finished Ceiling	295mm (11 5/8")
Product Weight	66Kg (146lb)
Packaging Dimensions	TBC
Shipping Weight	TBC
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Compatible Projectors	Sony VPL-GTZ380, VPL-VW5000ES
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, MDF Pre-install Ceiling Cassette, IR remote control

PDR-GTZ380
PROJECTOR DROP RANGE

future automation

DESIGN HIGHLIGHTS

Spring catches aid a quick and simple mechanism installation.

Available with two different drop options.
- Standard drop 740mm [29 1/8"]
- Long Drop 1200mm [47 1/4"]


Full cable management keeps all power and signal cables as neat and tidy as possible.


Top cover panel finishes internal void in matching white satin finish.


Slotted mounting system provides easily adjustable installation for almost any projector.


Standard control box can also control a third party product such as a projector screen.

VIEWS BELOW SHOW ACTION FROM IN POSITION TO DOWN POSITION

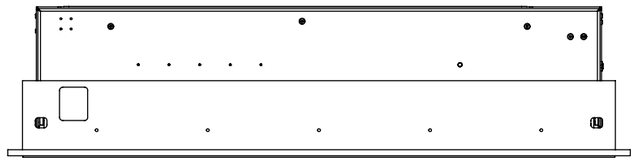


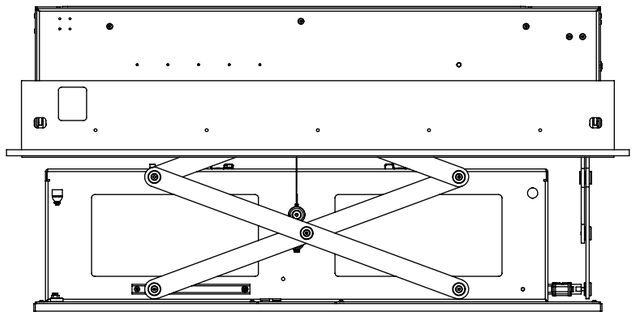

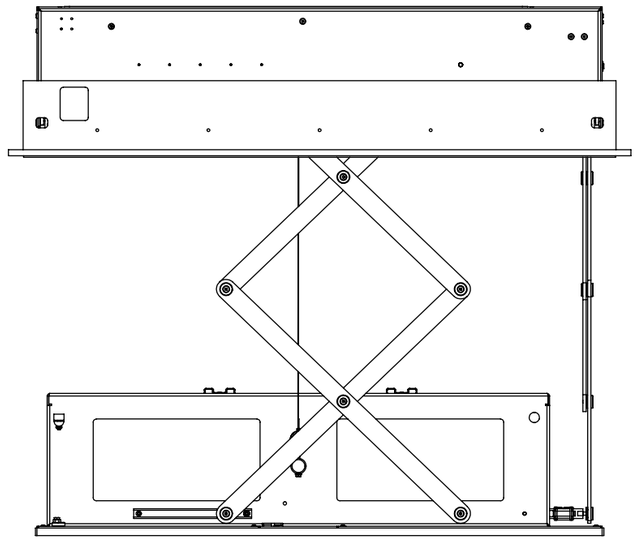

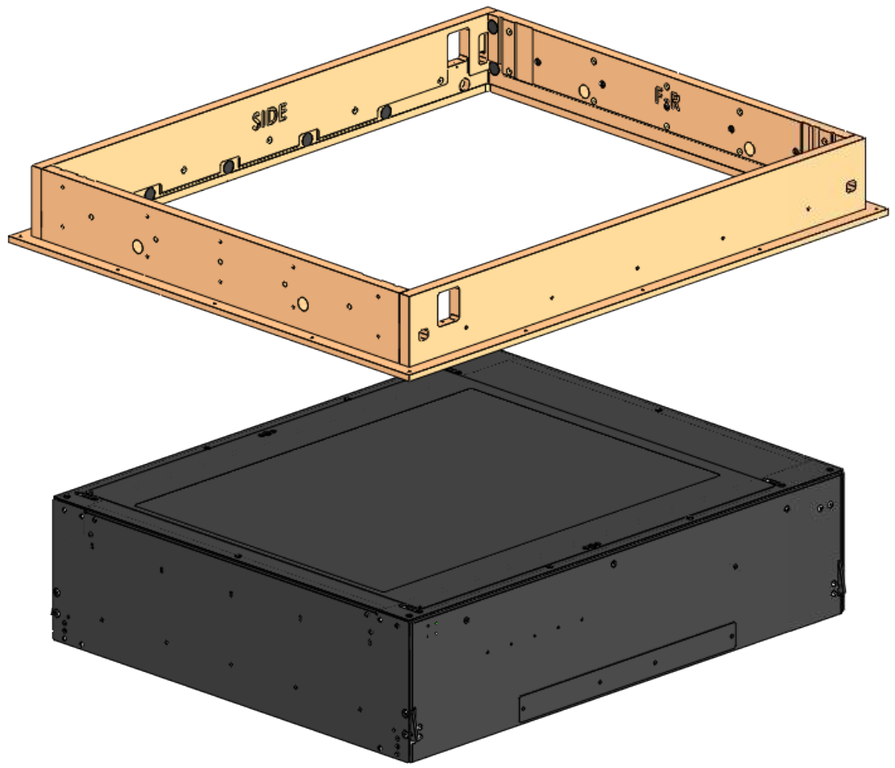

For quick and simple install, mechanism easily clicks into supplied pre-install framework.

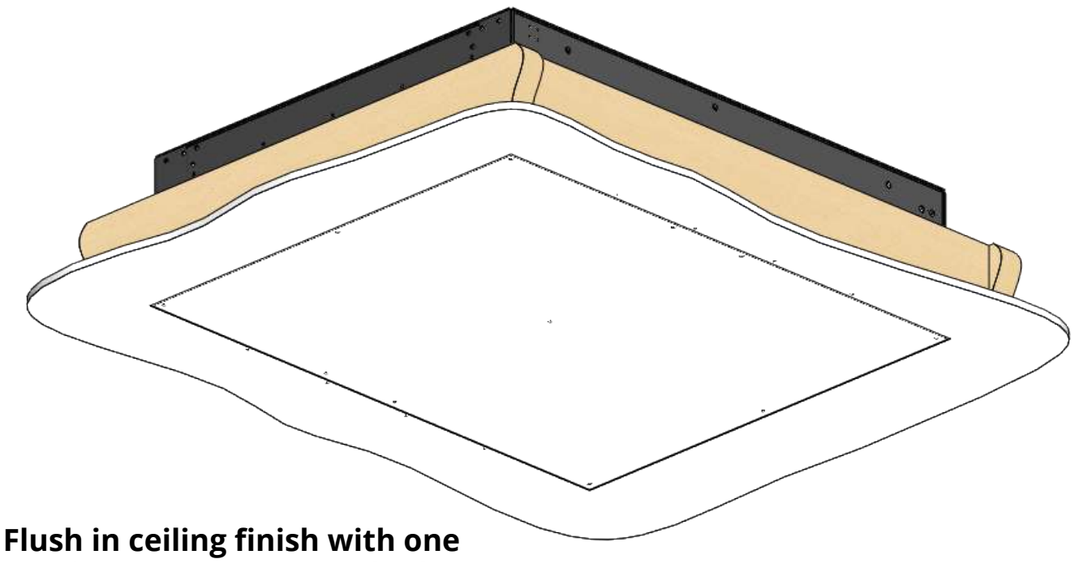

Flush in ceiling finish with one continuous 3mm [1/8"] shadow gap around panel.


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 005
SHEET 3

PDR-GTZ380
PROJECTOR DROP RANGE

future automation

FIXING TO WOODEN BEAMS

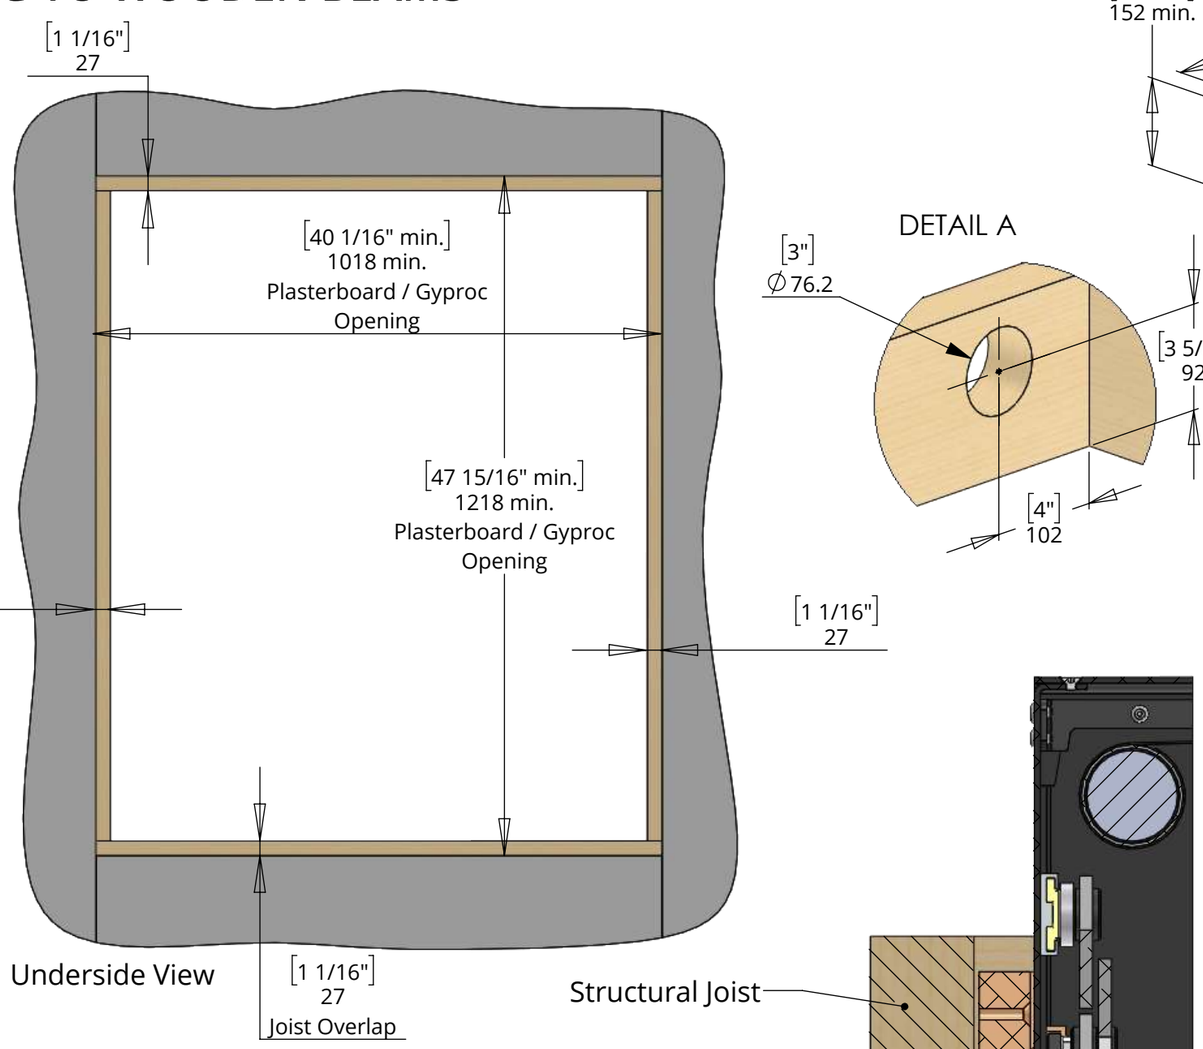

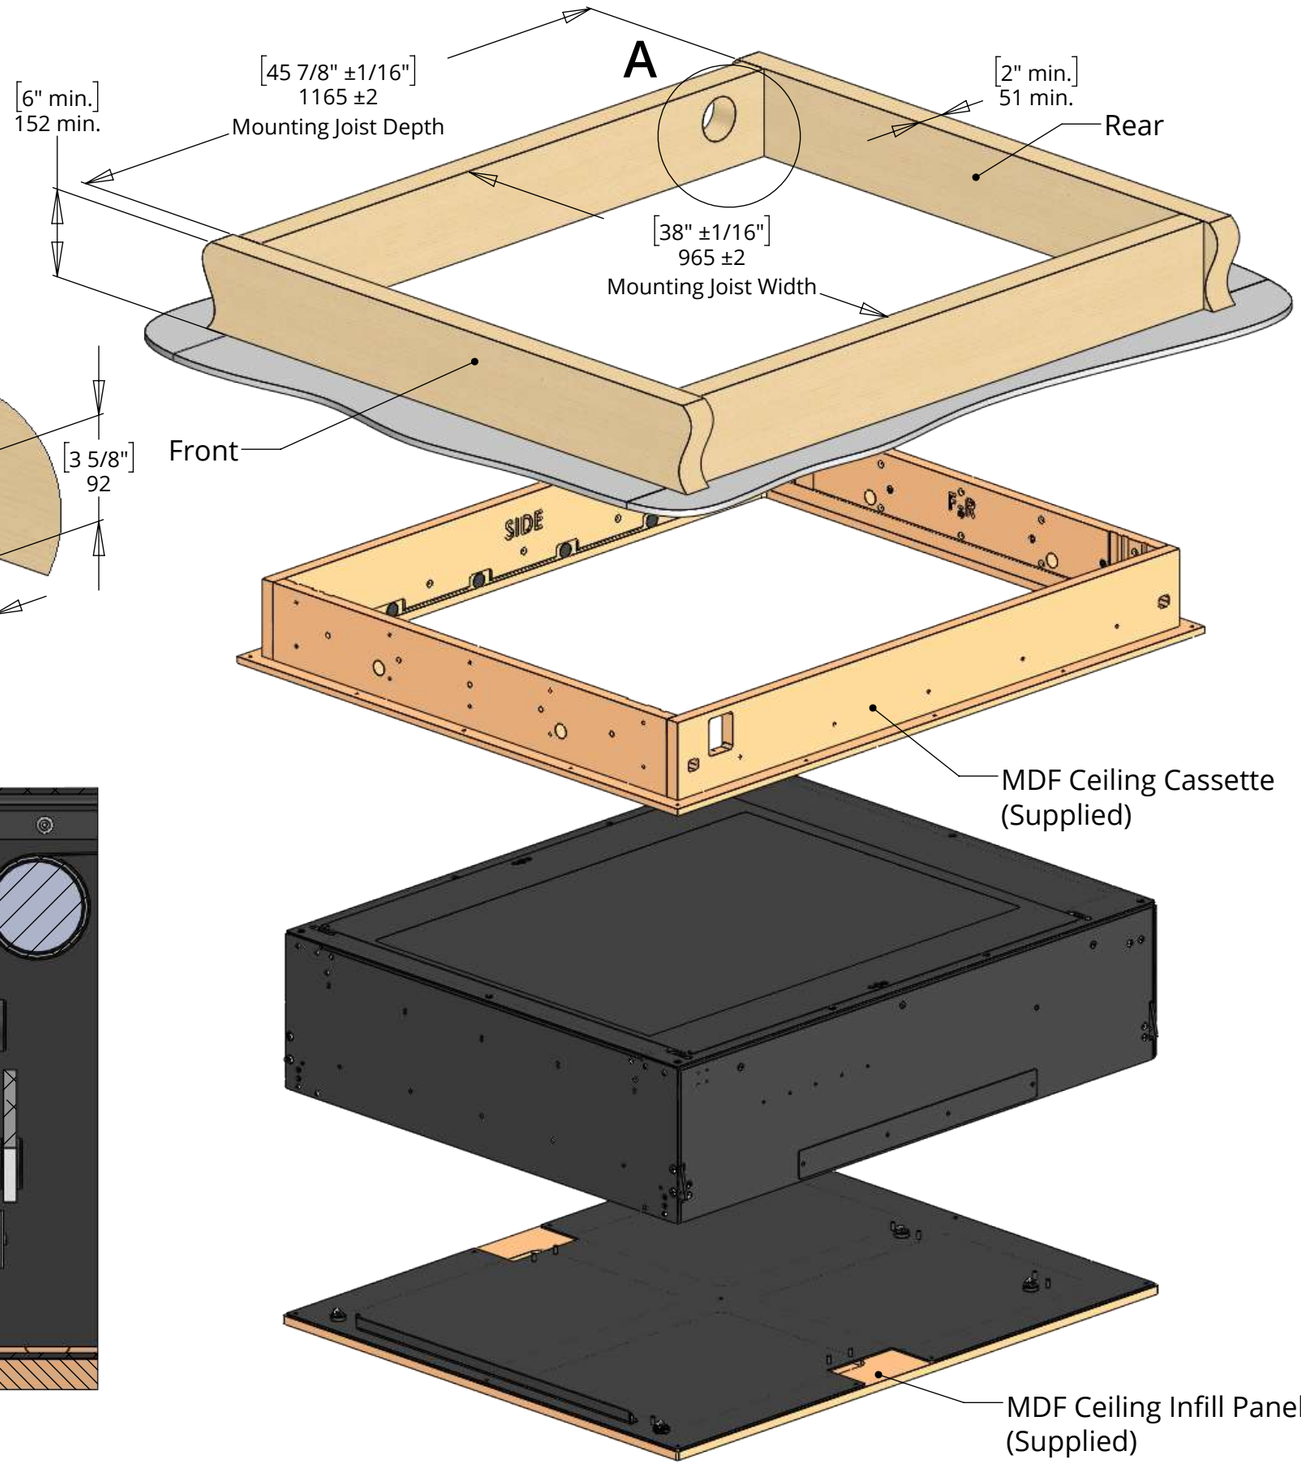

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 005
SHEET 4

PDR-GTZ380
PROJECTOR DROP RANGE


future automation

INSTALLATION PROCEDURE


1. Install MDF Ceiling Cassette

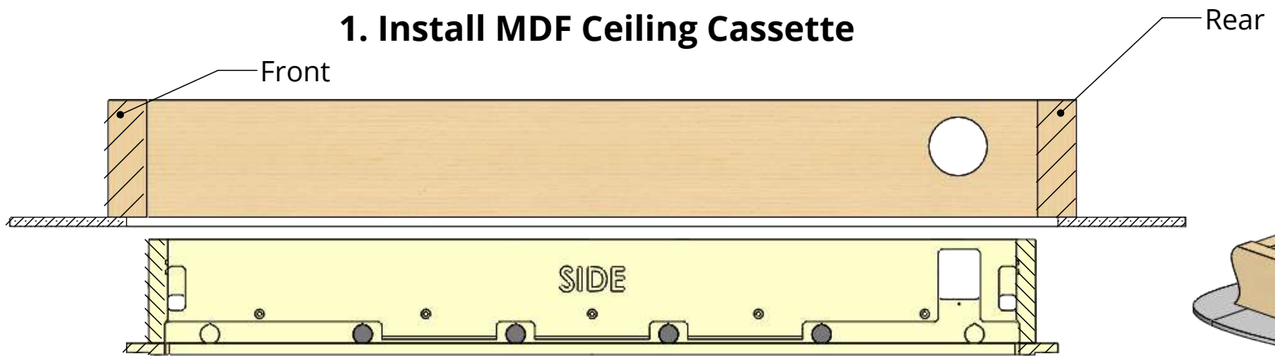


2. Prepare Cabling

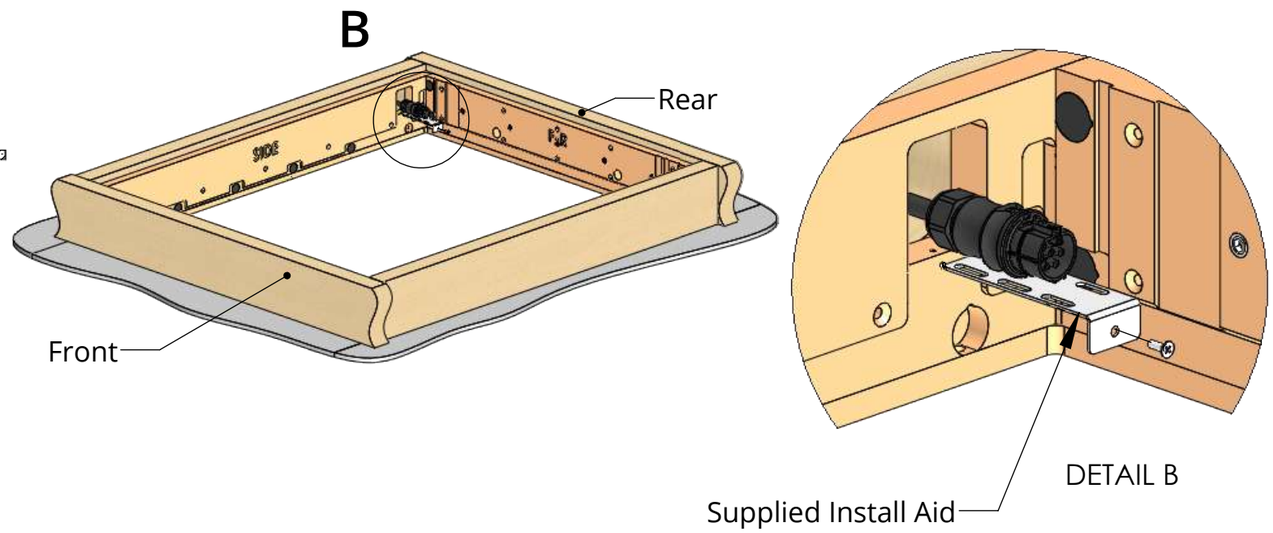

3. Install Mechanism

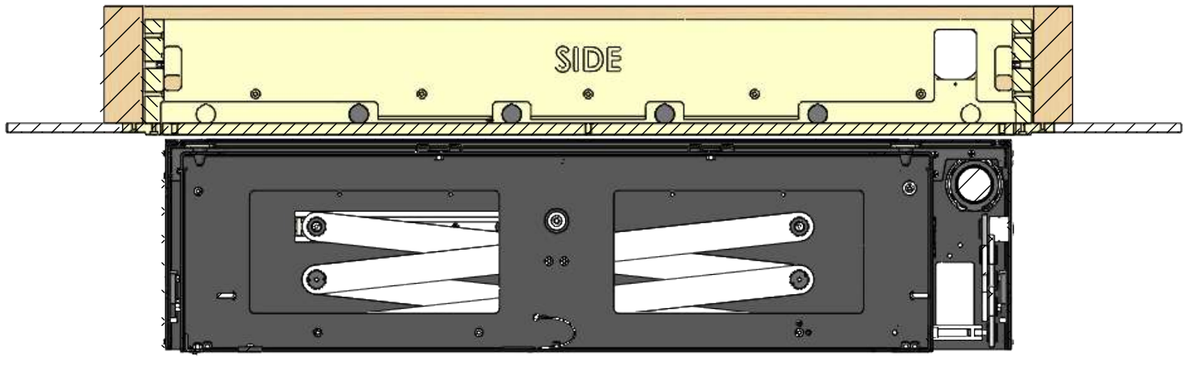


4. Plaster and Finish Ceiling

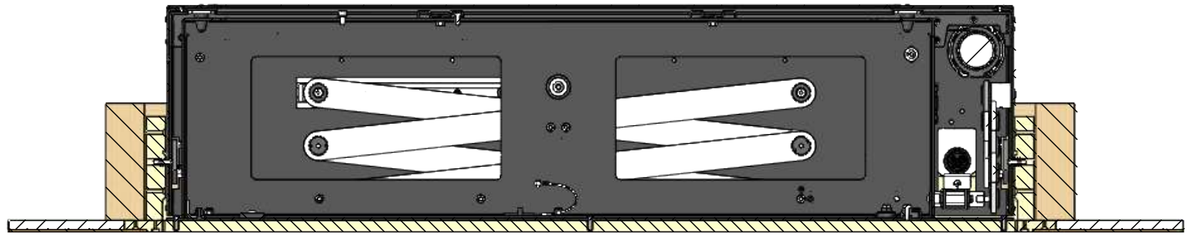



PDR-GTZ380
PROJECTOR DROP RANGE


future automation

MECHANISM DIMENSIONS

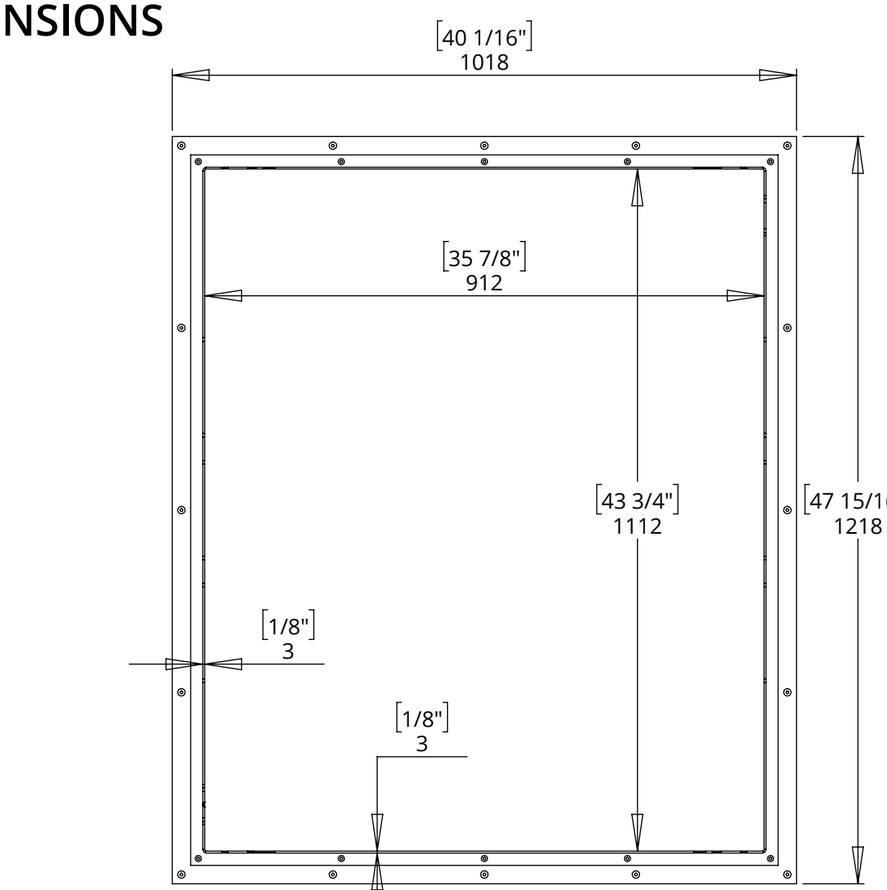

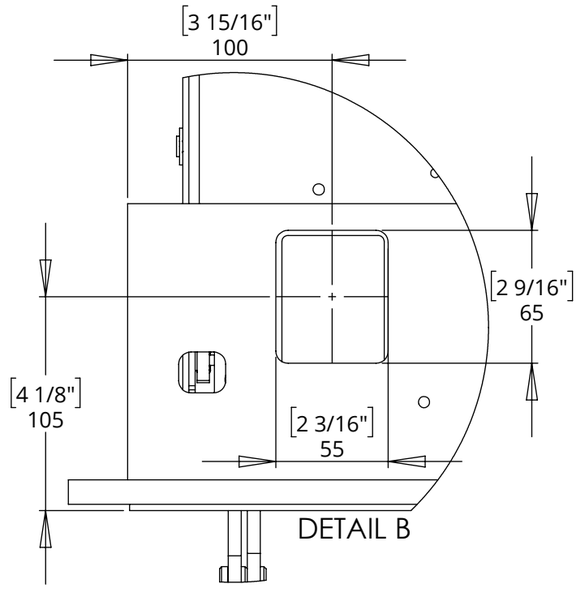

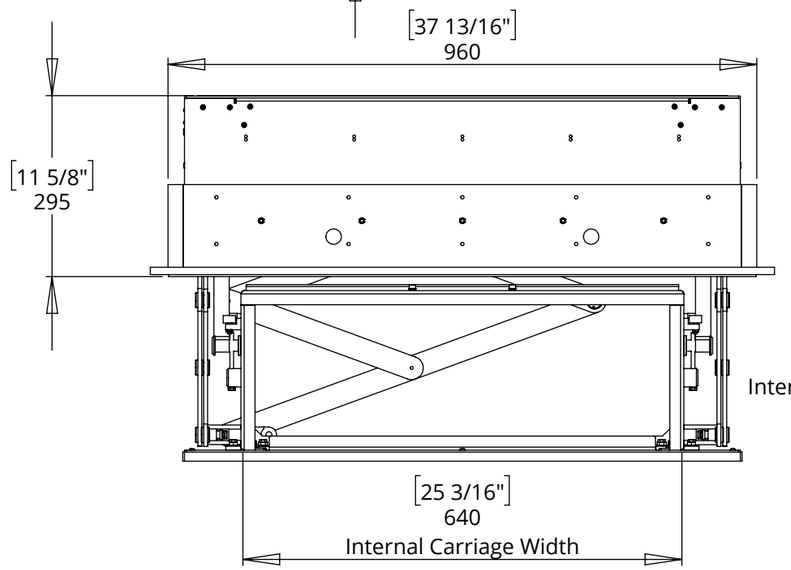

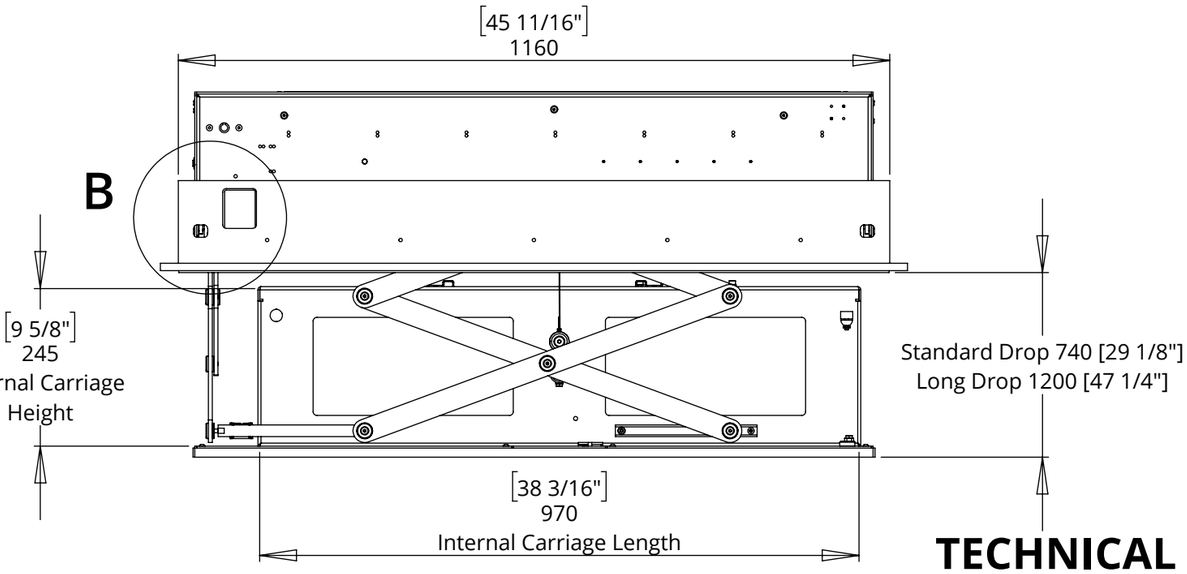


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 005
SHEET 6

PDR-GTZ380
PROJECTOR DROP RANGE

future automation

CONTROL BOX DETAILS

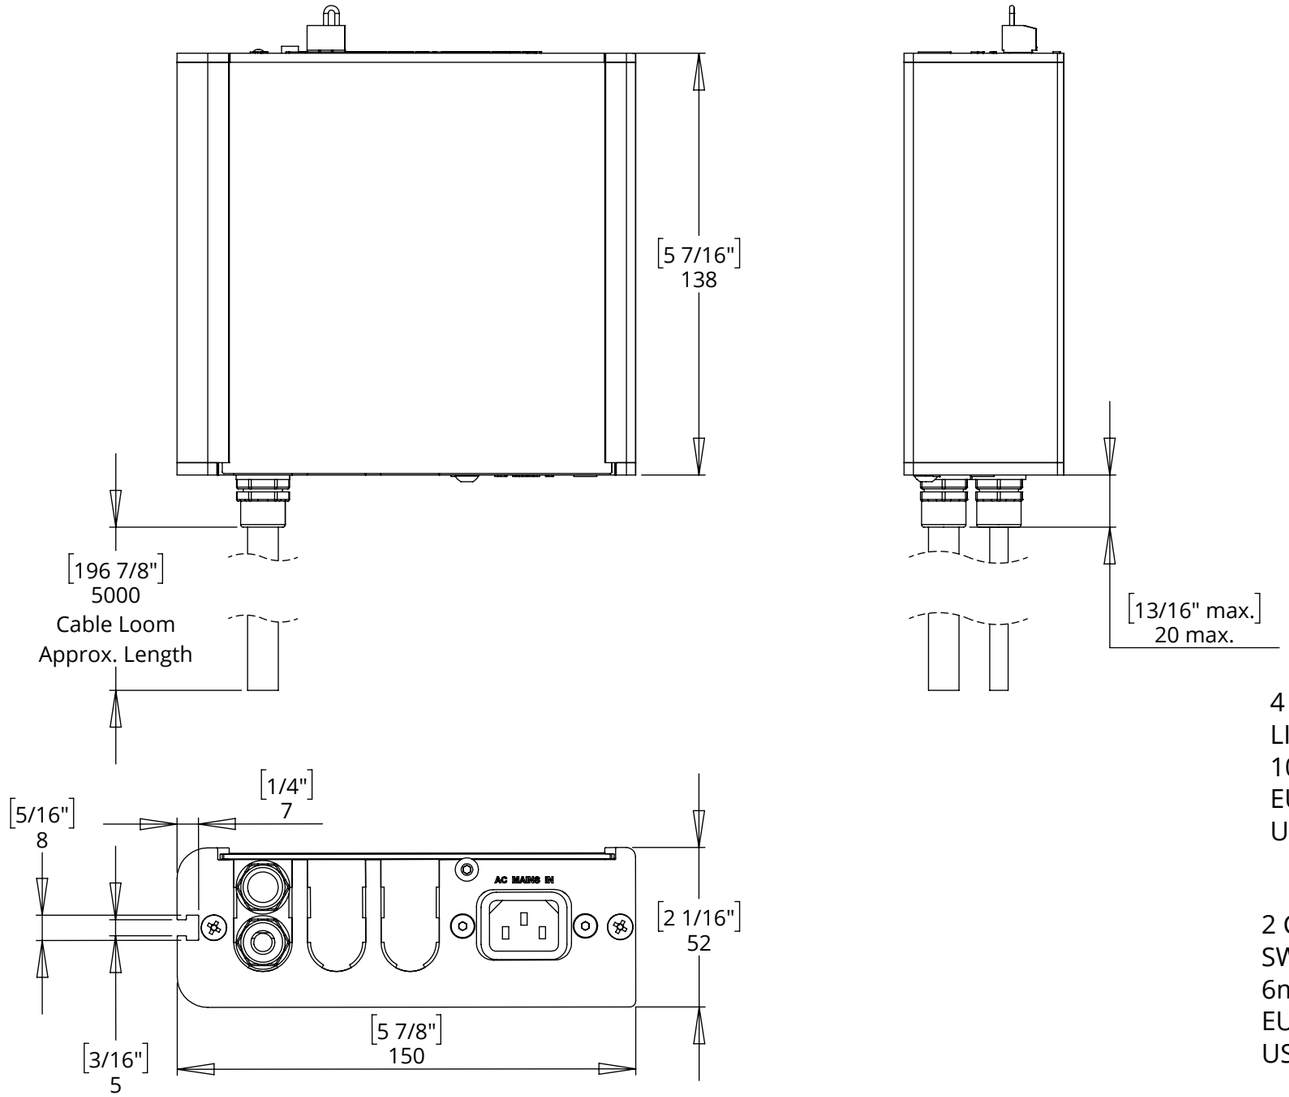

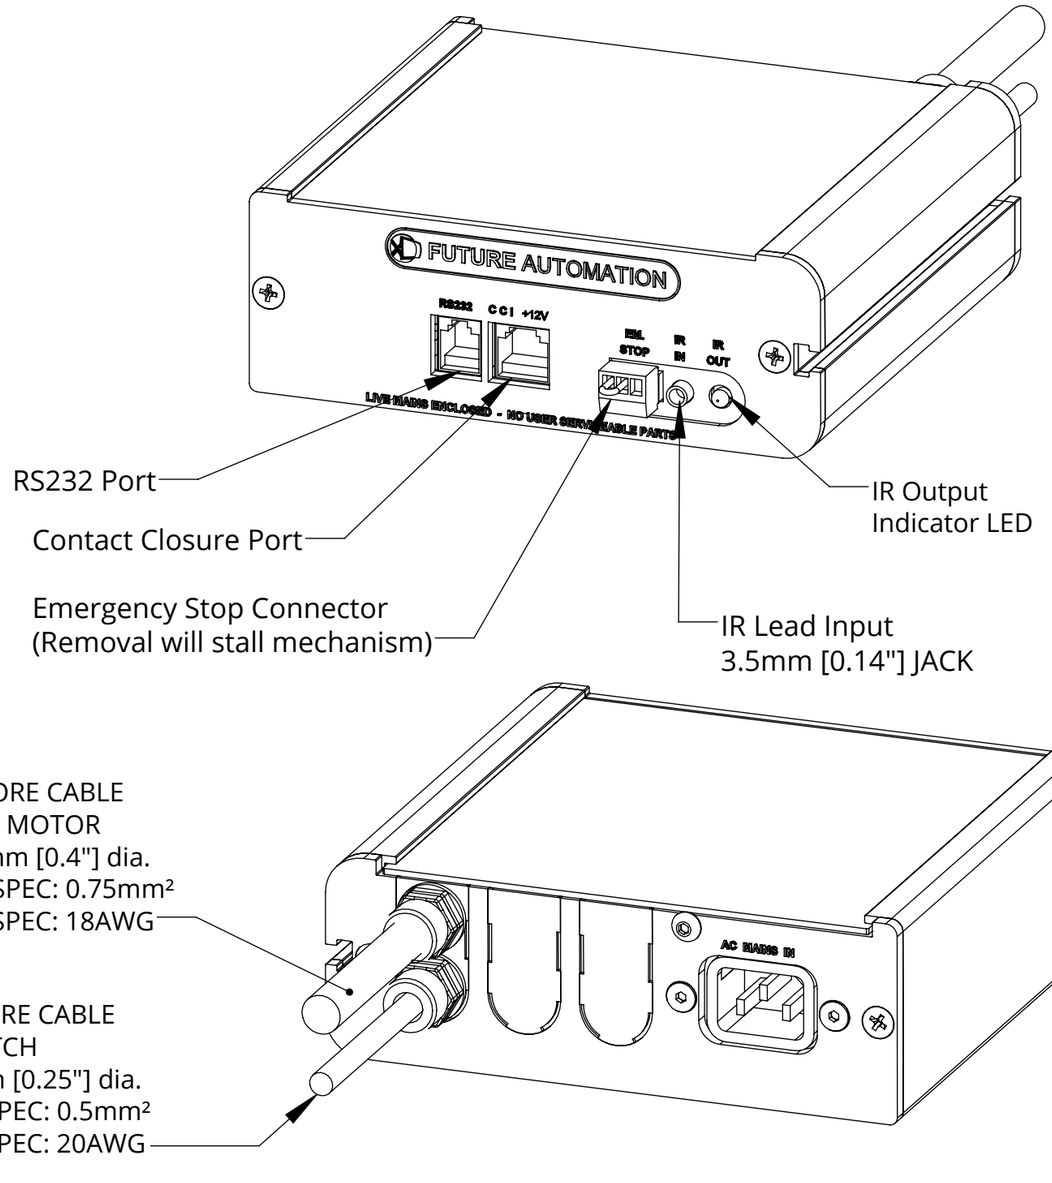

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 5m [196 7/8"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].