
PIC-H3
PICTURE LIFT HEAVY

future automation

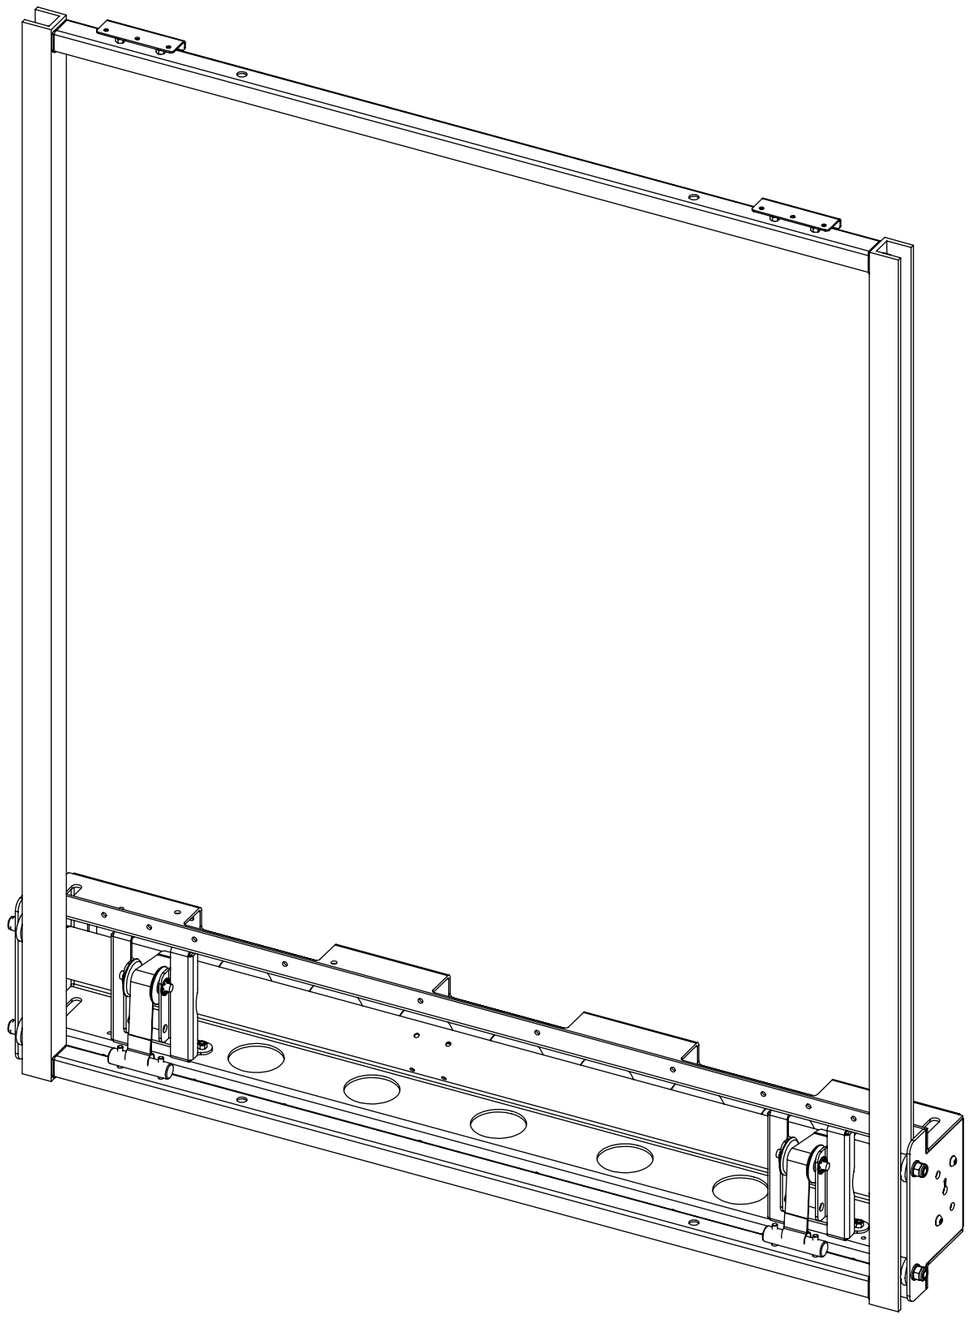

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 1


PIC-H3
PICTURE LIFT HEAVY


future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions	1210mm (47 5/8") x 1012mm (39 13/16") x 121mm (4 3/4")
Maximum Weight Capacity	35Kg (77lb)
Maximum Travel	1010mm (39 3/4")
Product Weight	14Kg (30lb)
Packaging Dimensions	1300mm (51 3/16") x 310mm (12 3/16") x 240mm (9 7/16")
Shipping Weight	19Kg (42lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	140W
Power Consumption Standby	3W
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Custom RAL paint finishes
Package Contents	Mechanism, IR remote control
Marine Suitable	No

PIC-H3
PICTURE LIFT HEAVY

MECHANISM DETAILS

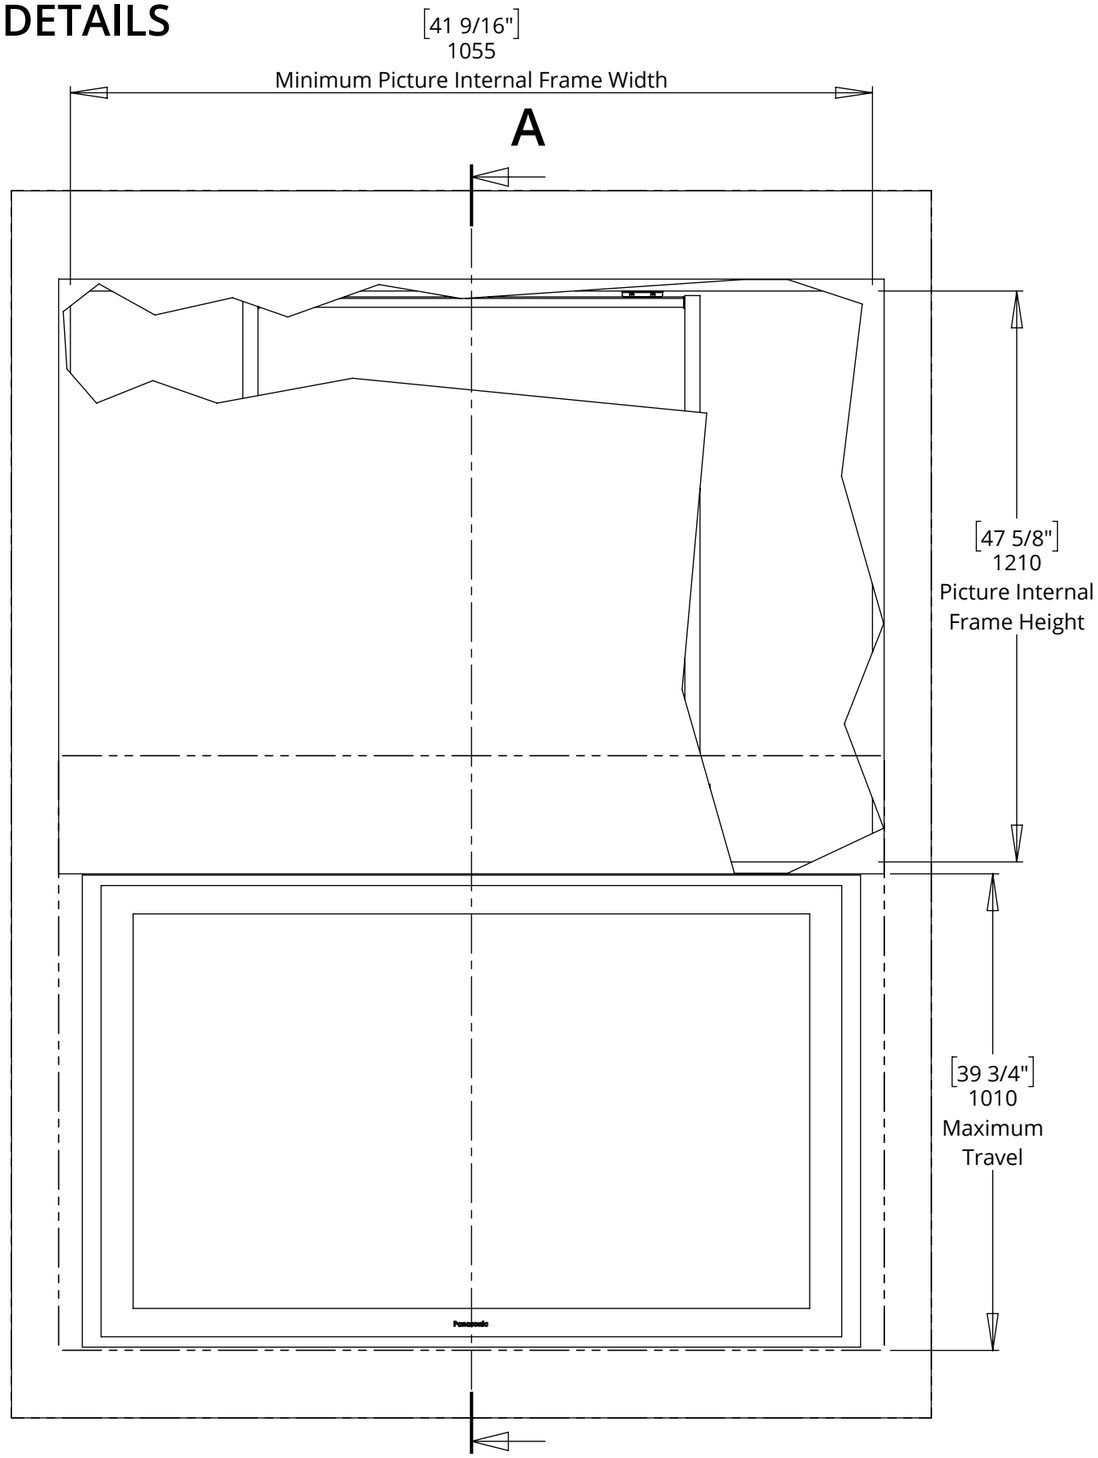

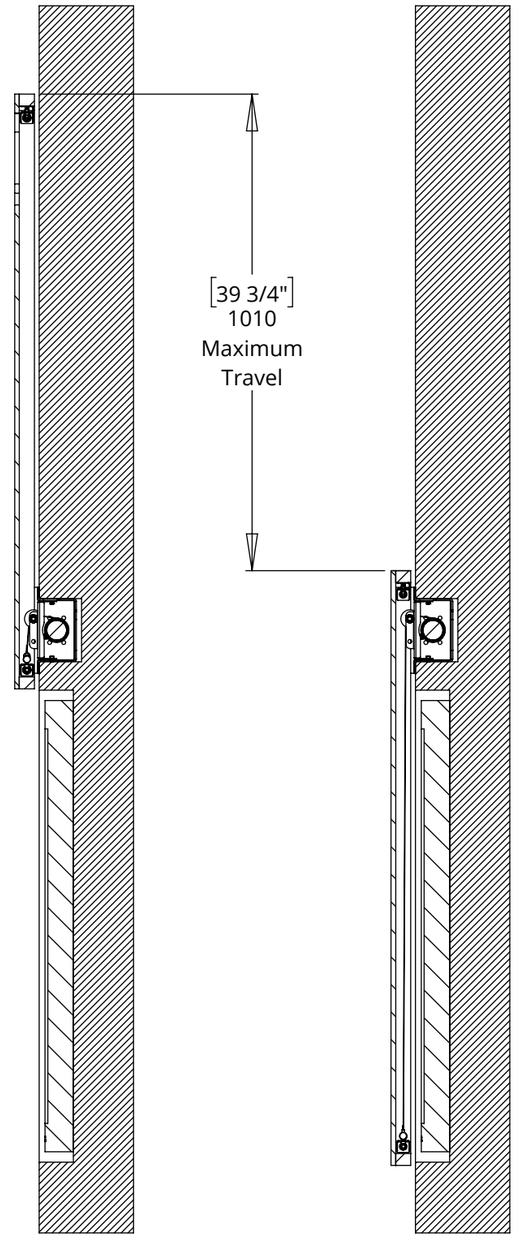



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 007
SHEET 3

PIC-H3
PICTURE LIFT HEAVY

MOUNTING DETAILS

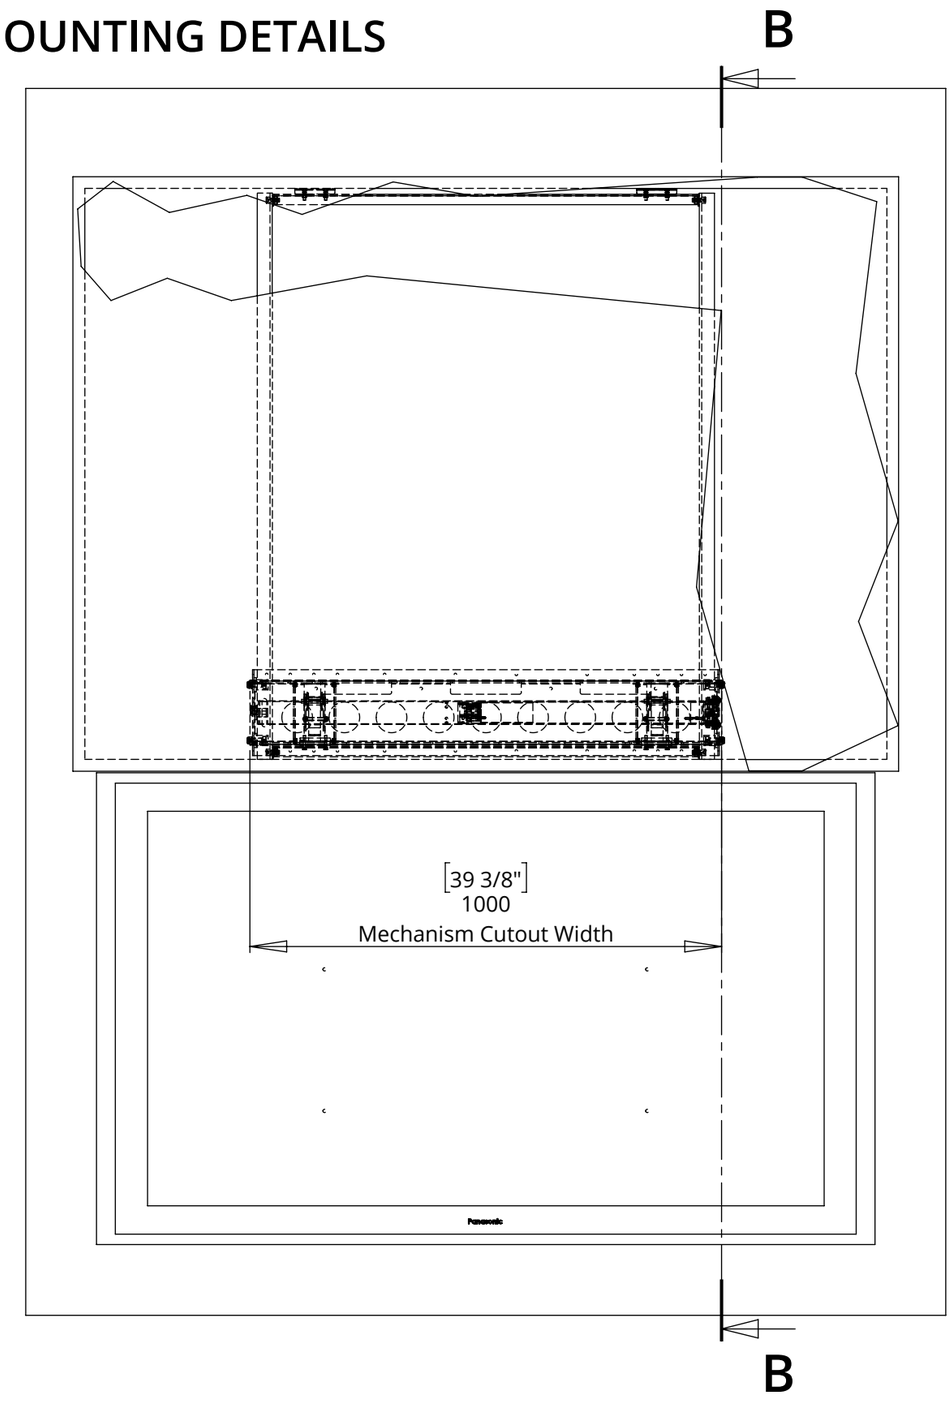

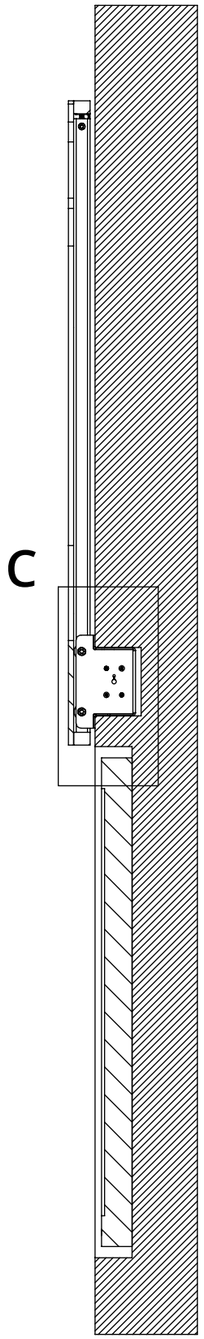

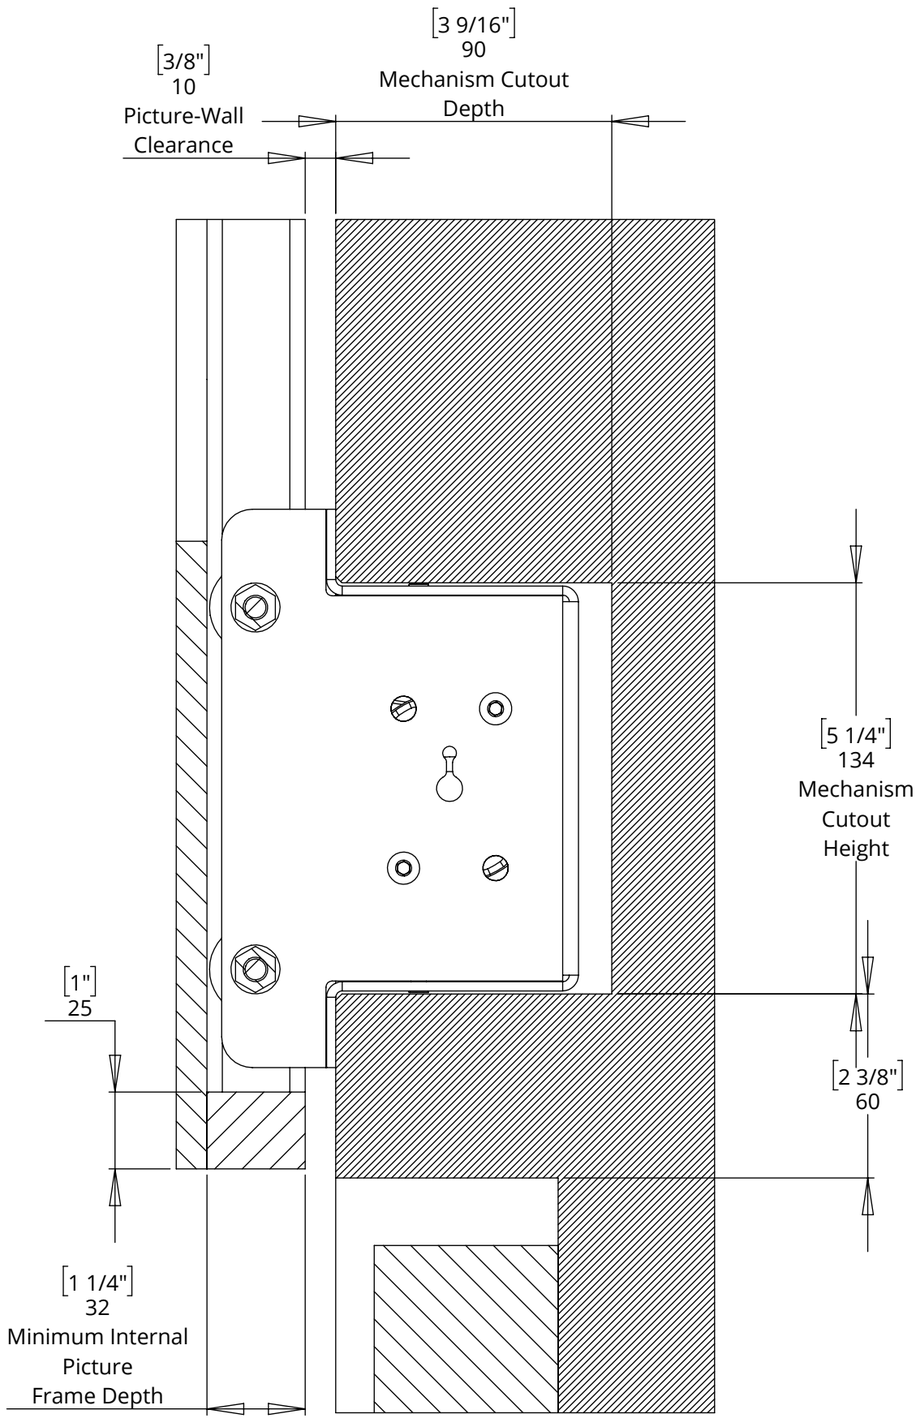


DETAIL C


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 007
SHEET 4

PIC-H3
PICTURE LIFT HEAVY

MECHANISM DIMENSIONS

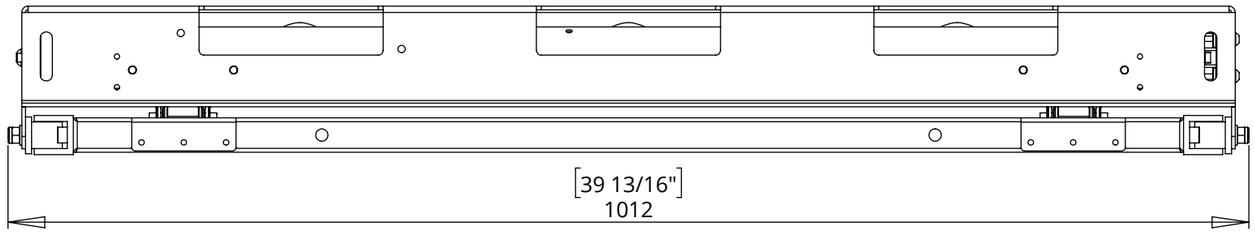

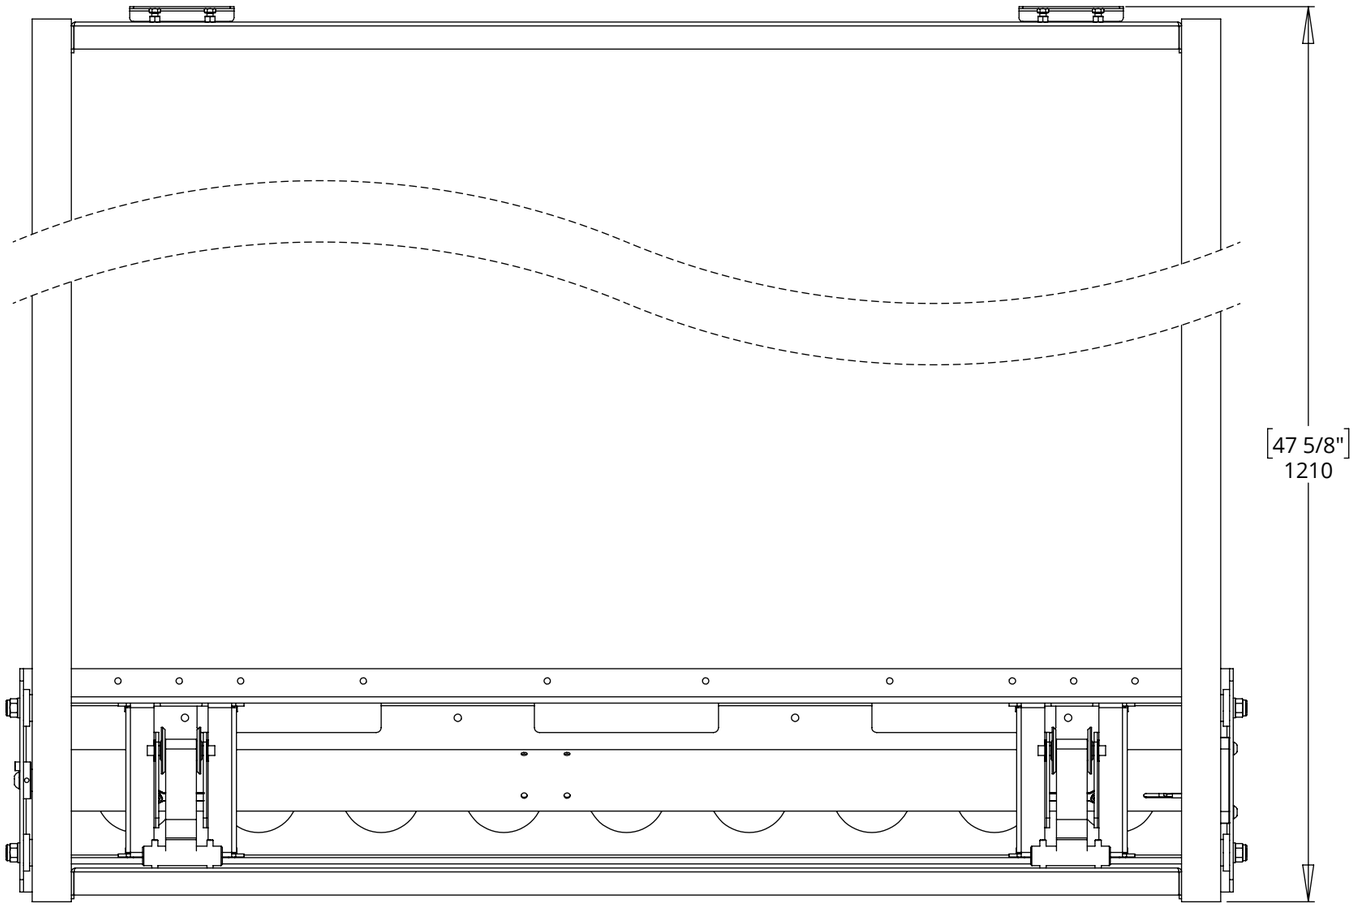

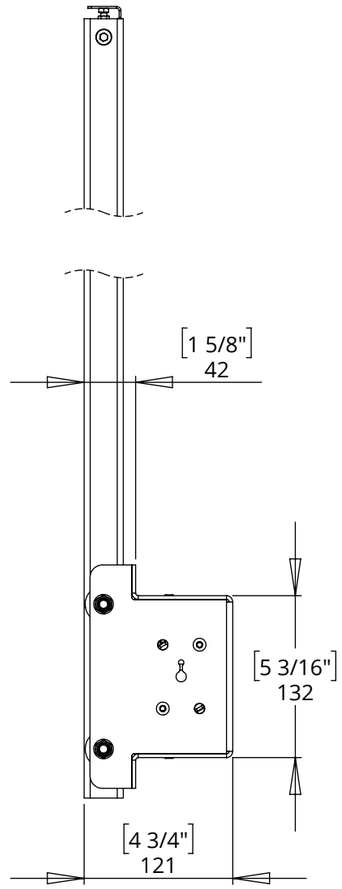



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 007
SHEET 5

PIC-H3
PICTURE LIFT HEAVY

CONTROL BOX DETAILS

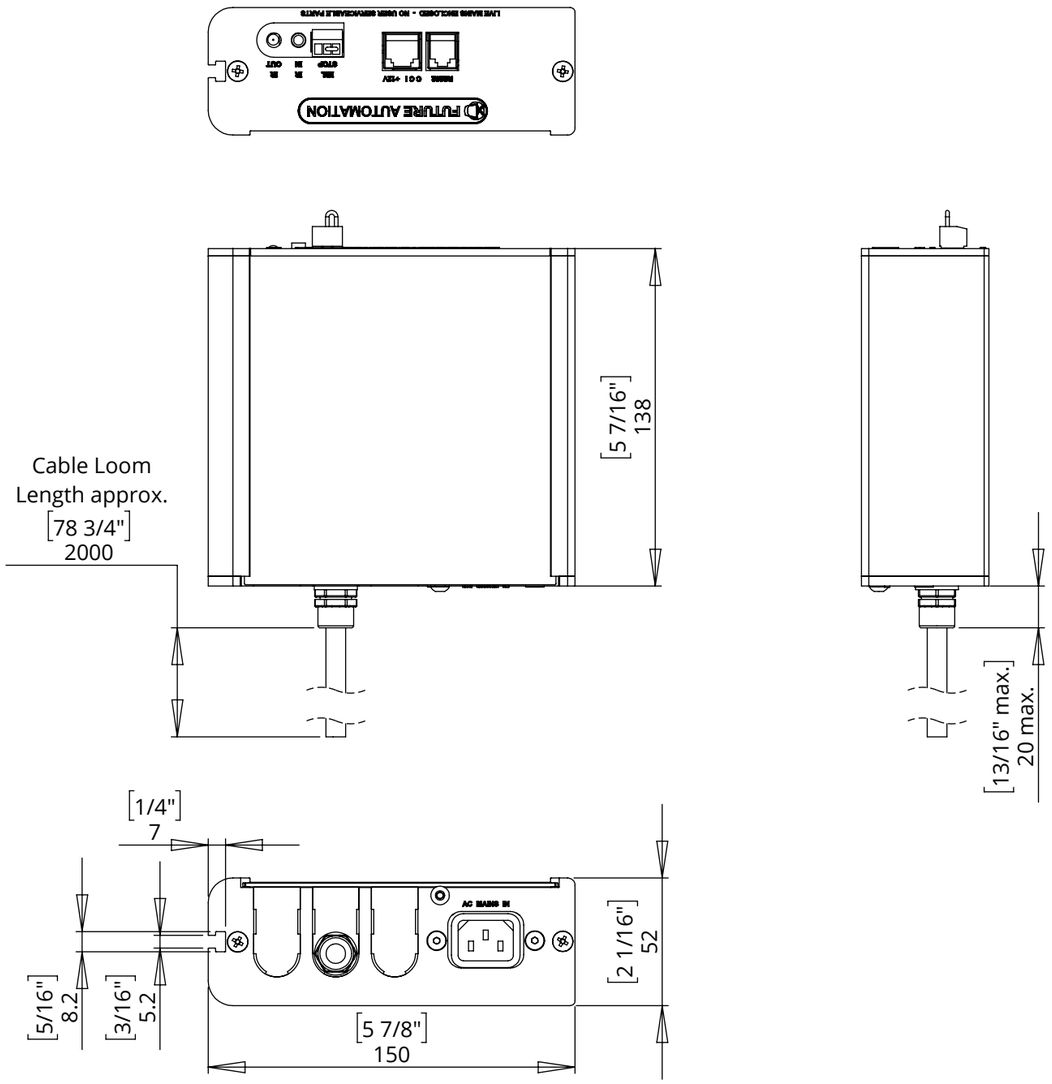

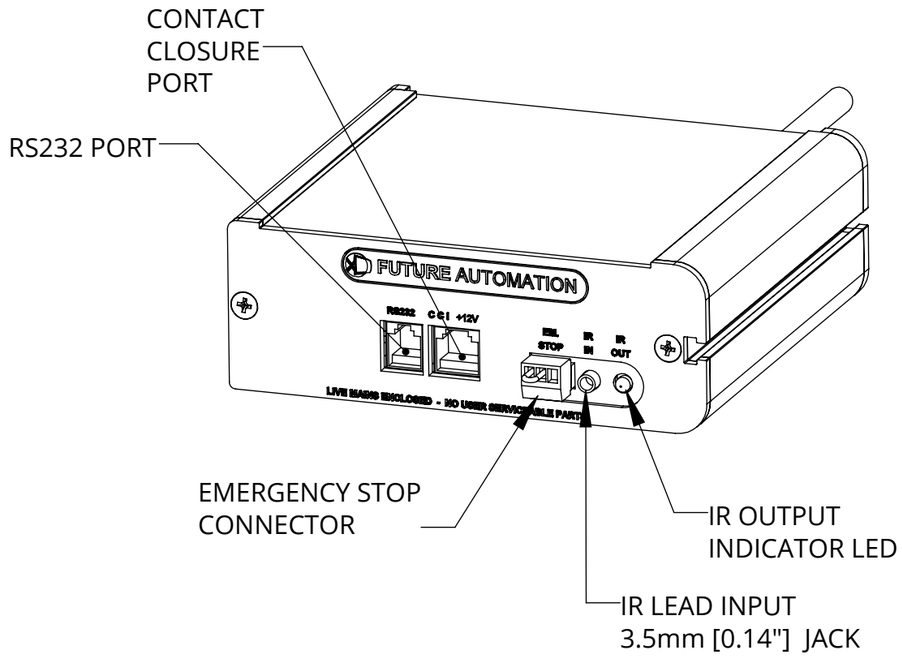

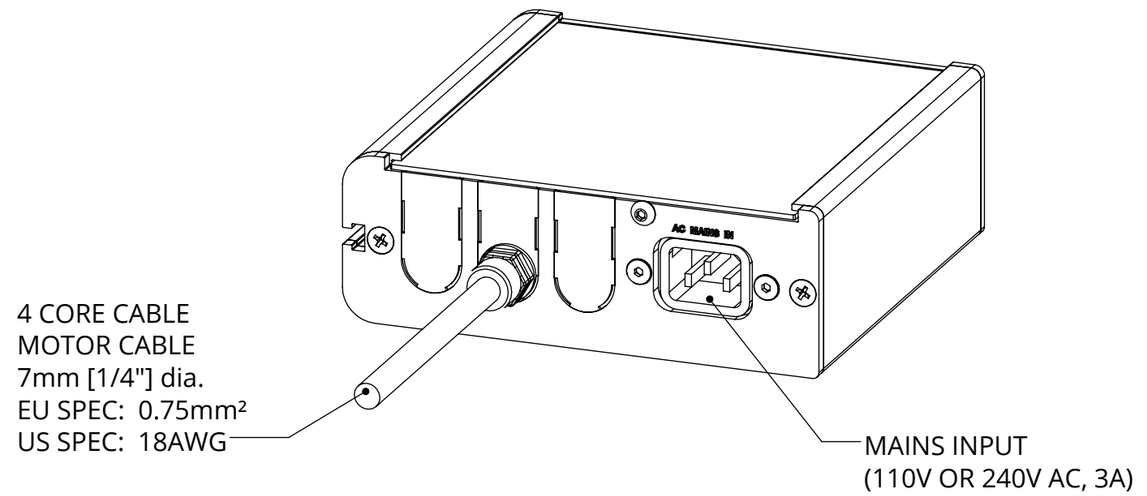

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 2m [78 3/4"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 6