
PIC-2
PICTURE LIFT MECHANISM

future automation

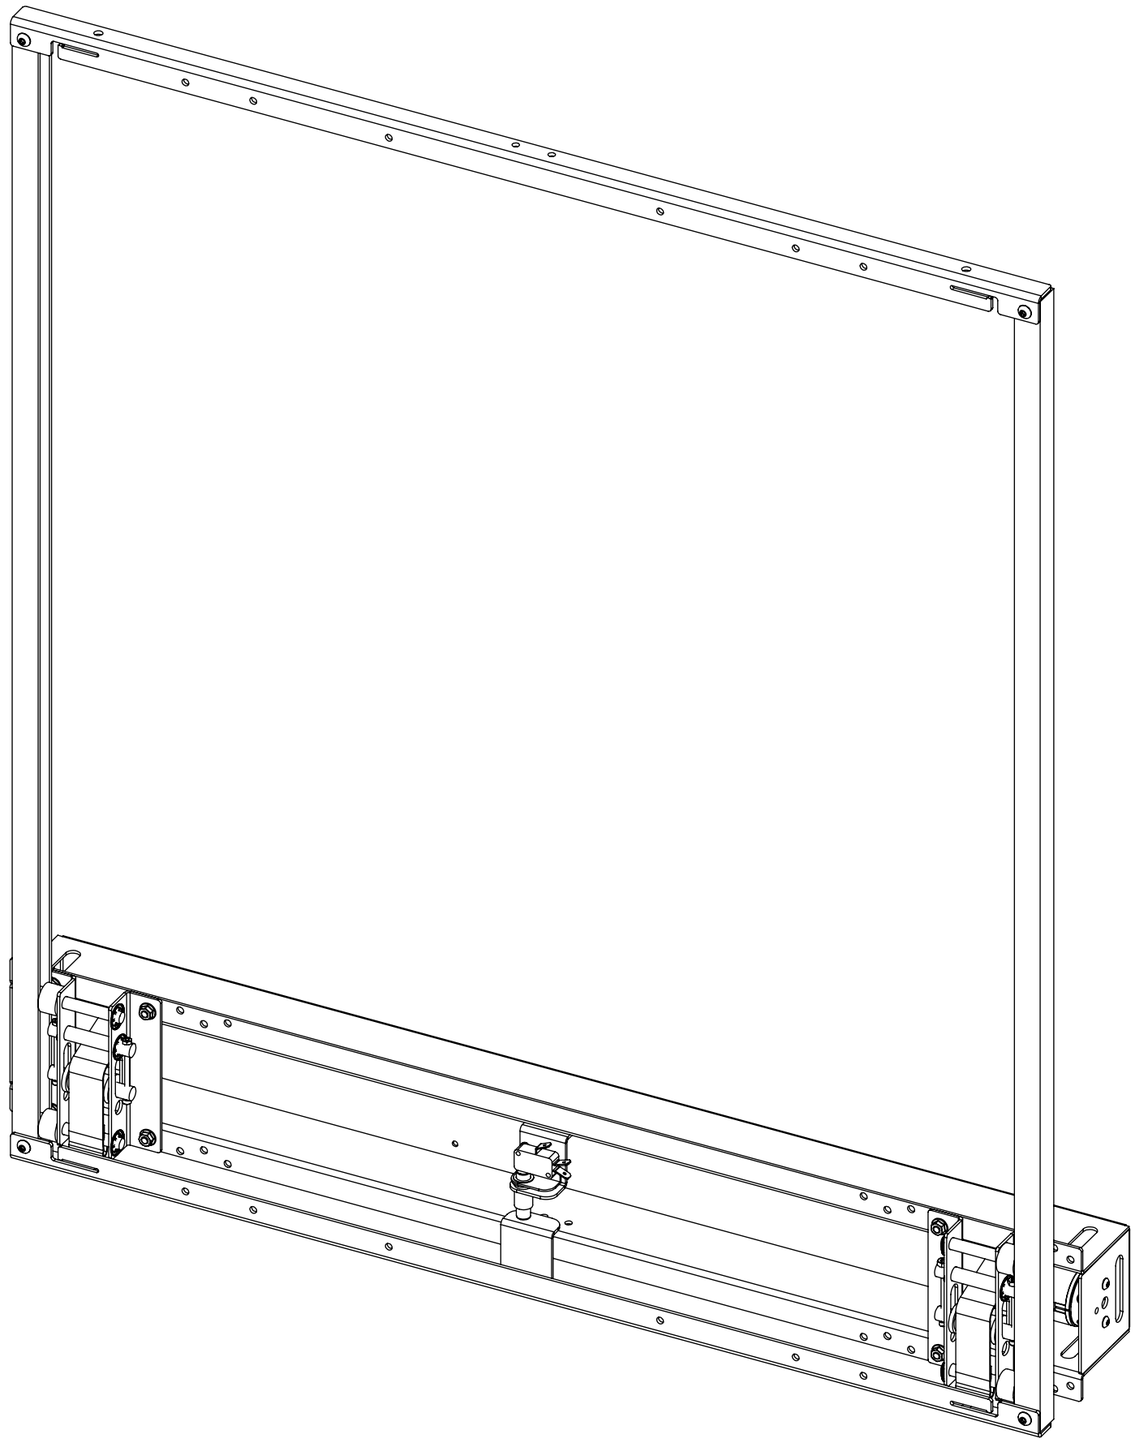

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 1


PIC-2
PICTURE LIFT MECHANISM


future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions (H x W x D)	868mm (34 3/16") x 797mm (31 3/8") x 102mm (4")
Maximum Weight Capacity	10Kg (22lb)
Maximum Travel	710mm (27 15/16")
Product Weight	7Kg (15lb)
Packaging Dimensions	930mm (36 5/8") x 300mm (11 13/16") x 210mm (8 1/4")
Shipping Weight	11Kg (24lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	110W
Power Consumption Standby	3W
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Marine suitable version
Package Contents	Mechanism, IR remote control
Marine Suitable	No

PIC-2
PICTURE LIFT MECHANISM

GENERAL DIMENSIONS

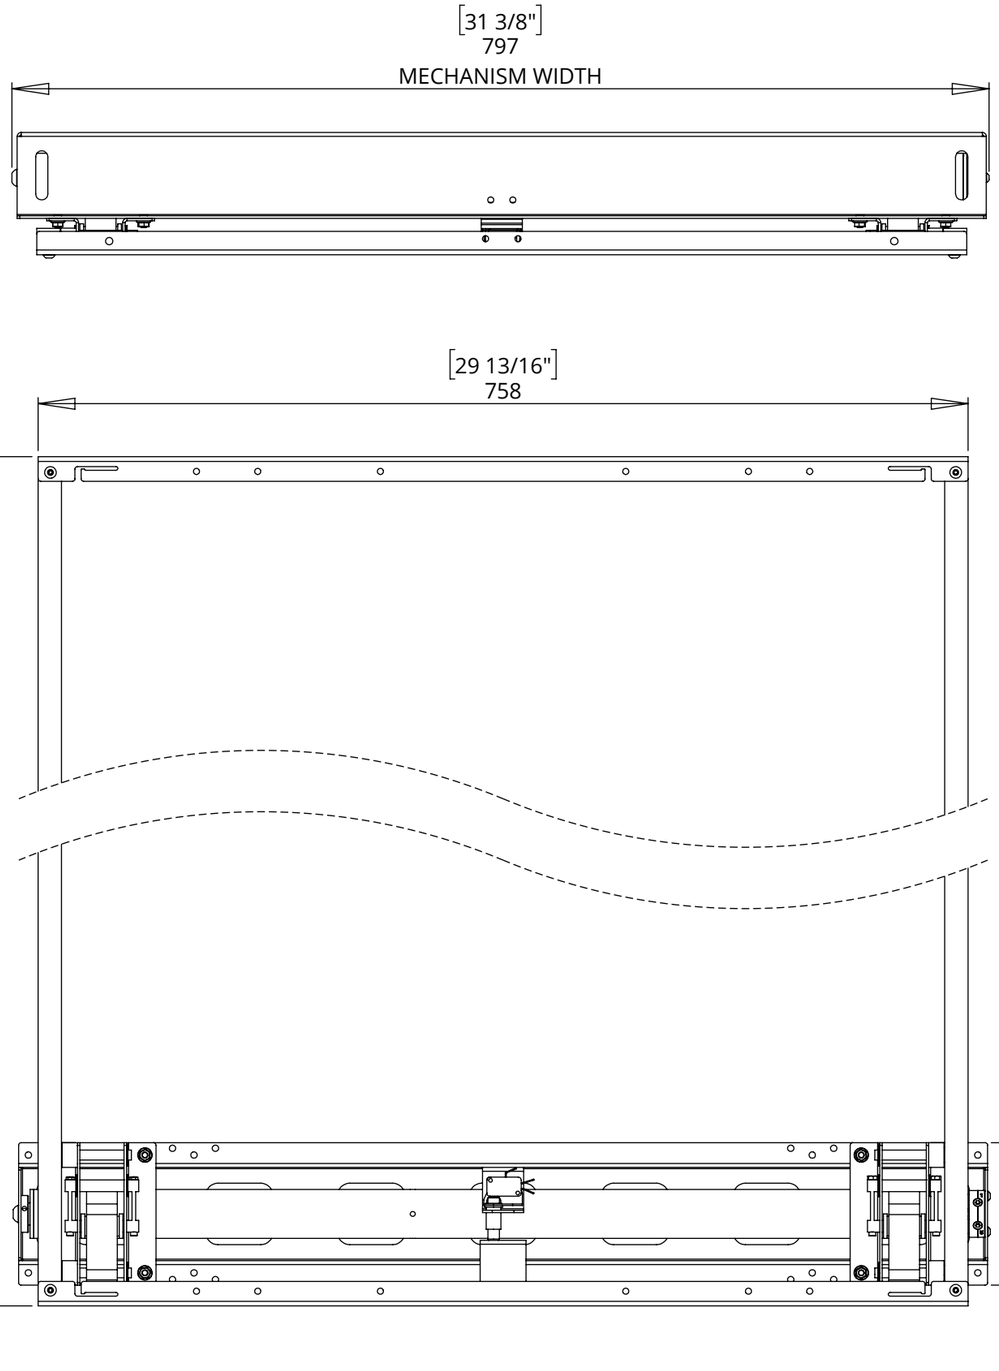

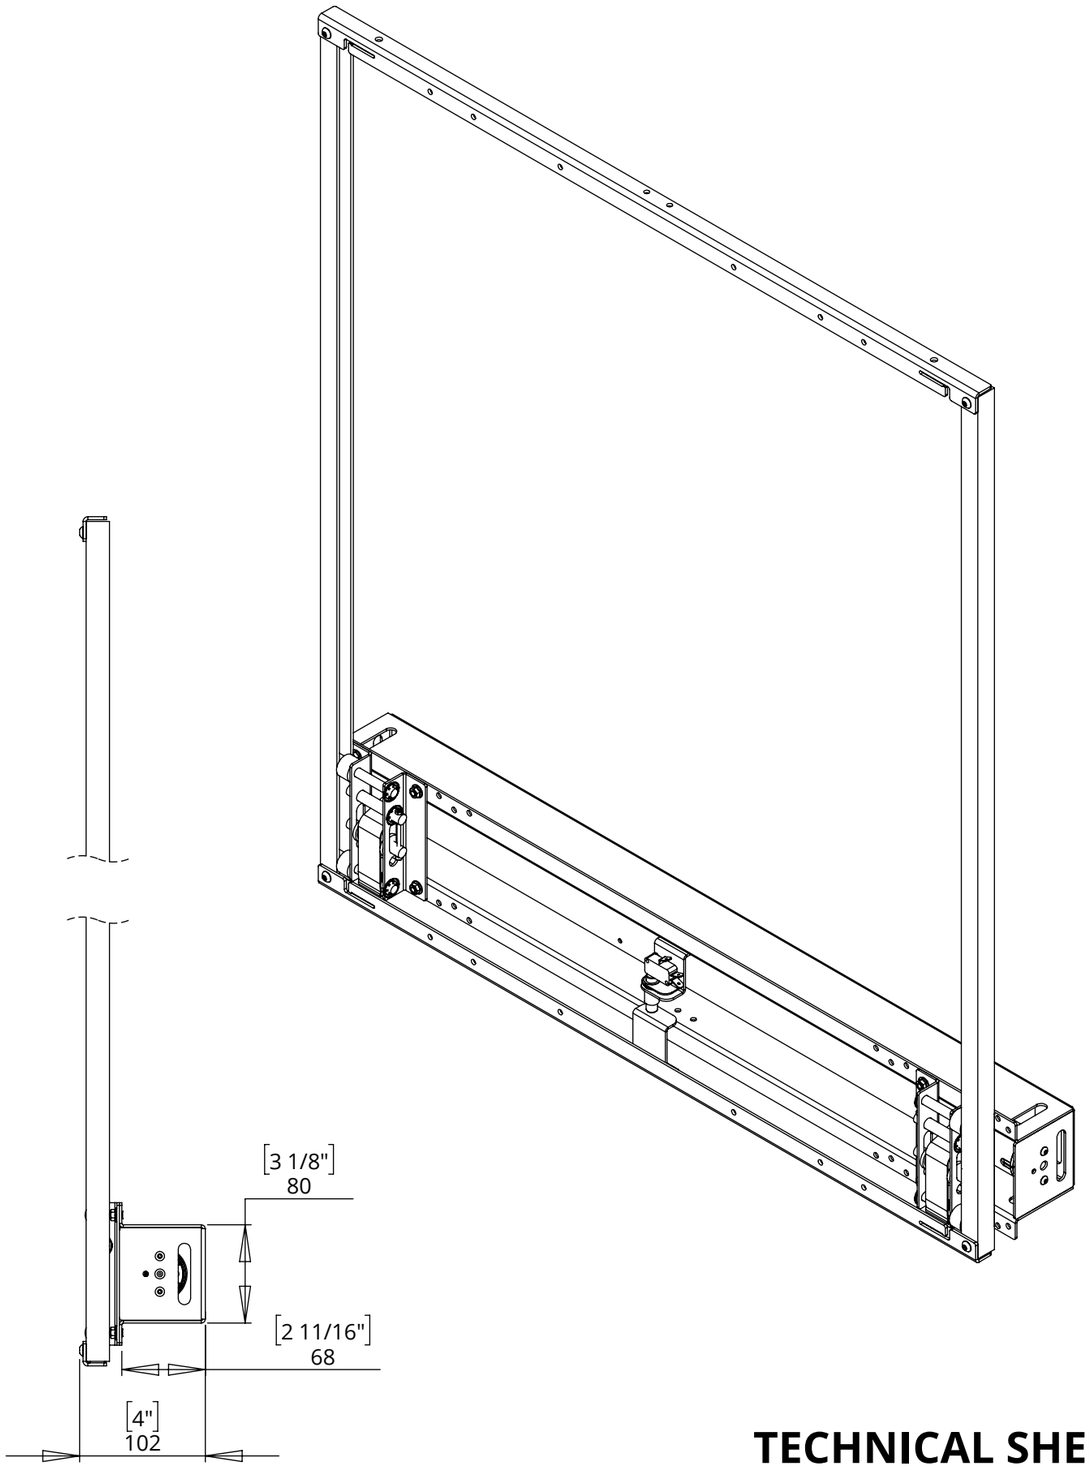



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 3

PIC-2
PICTURE LIFT MECHANISM


MECHANISM DETAILS

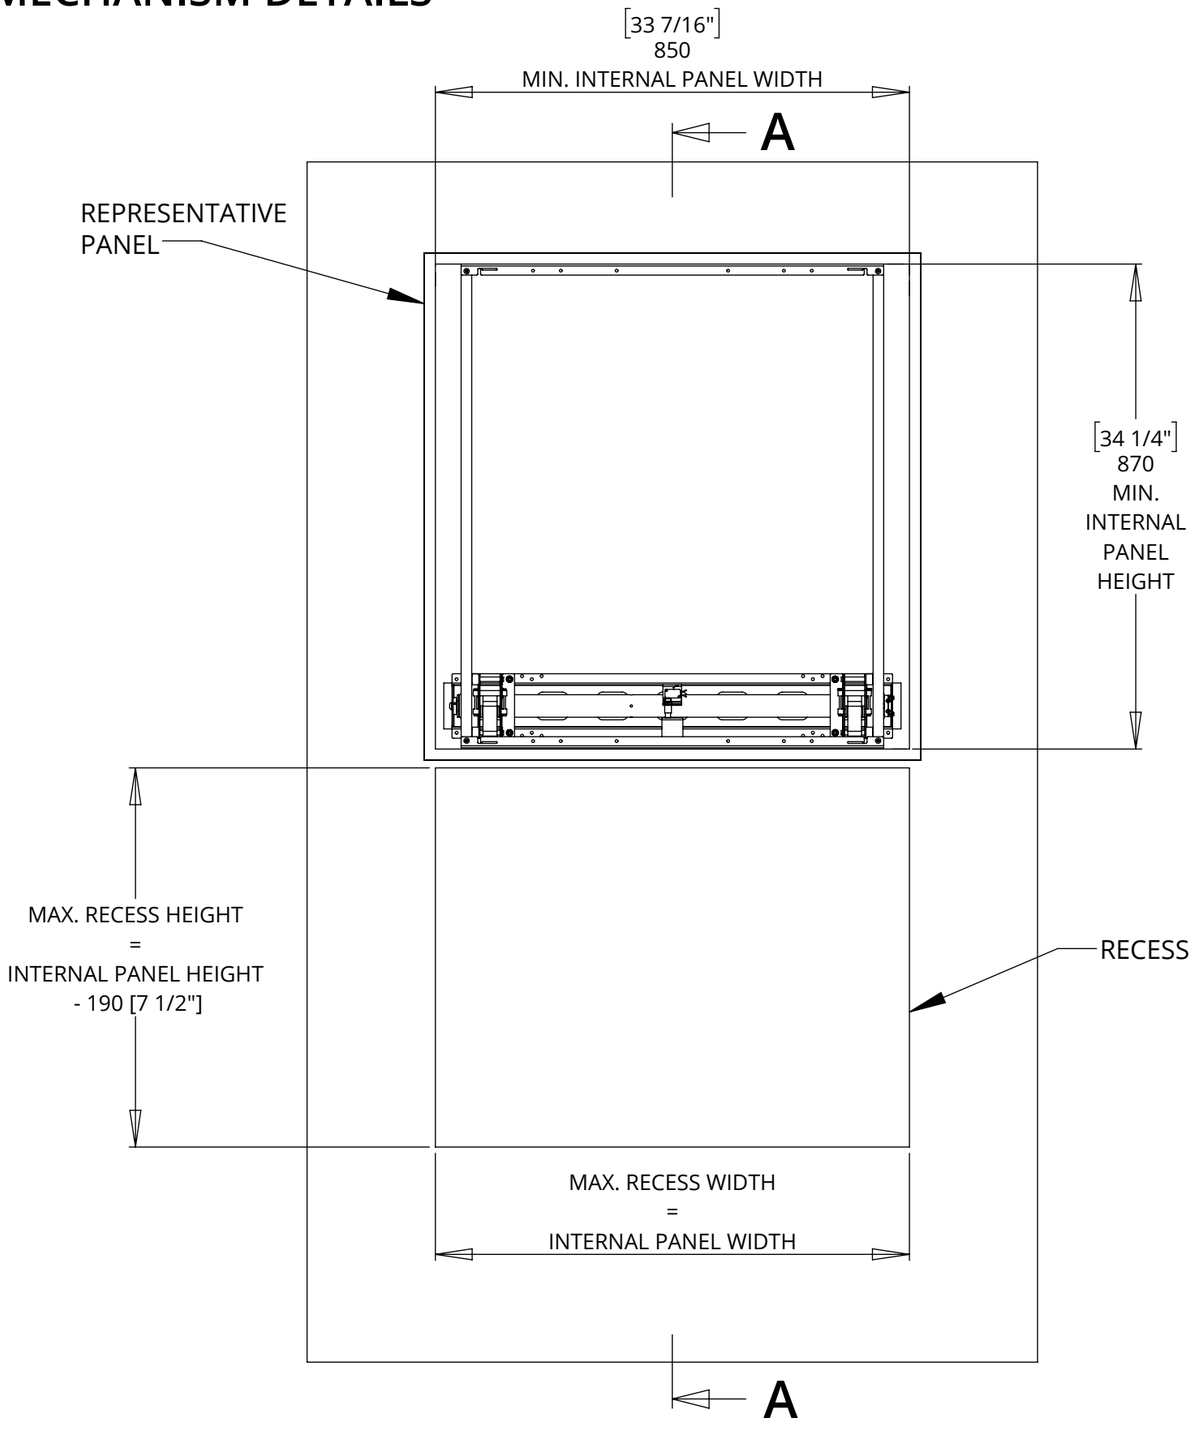


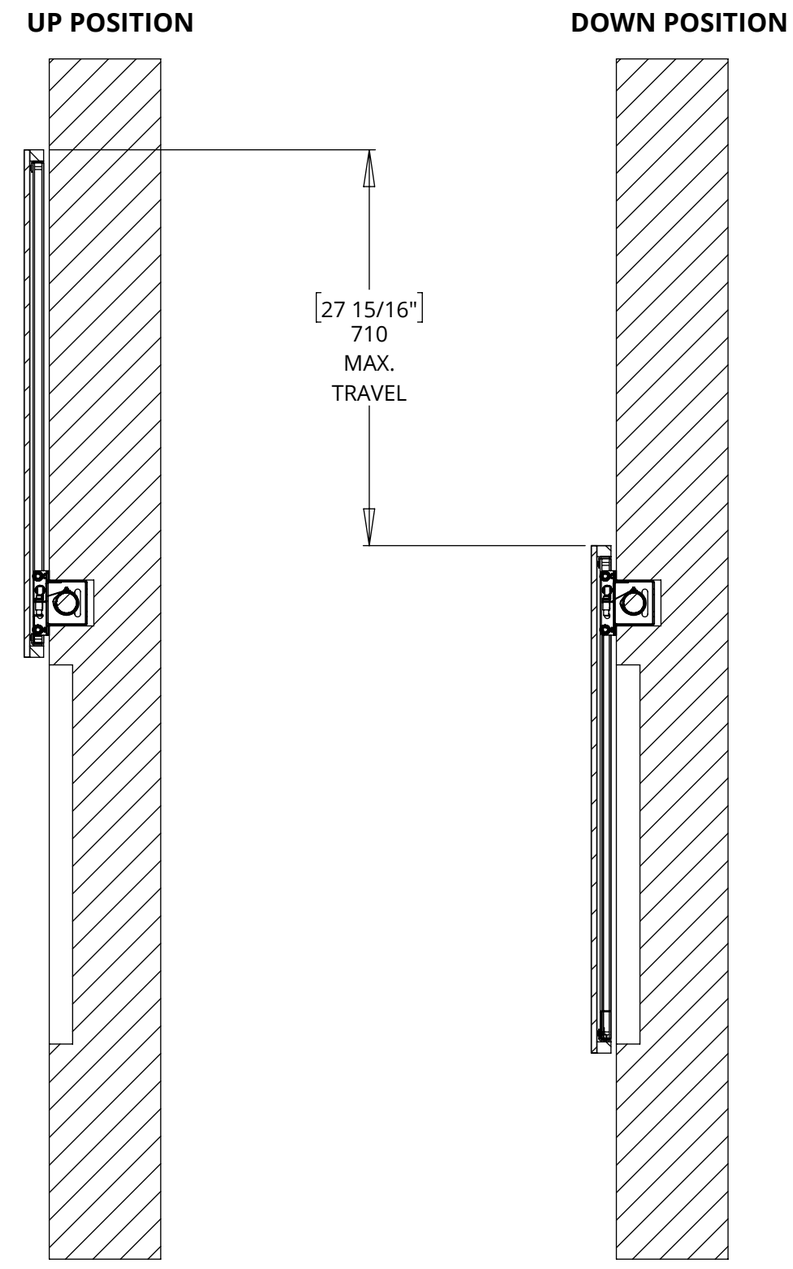


PIC-2
PICTURE LIFT MECHANISM

MOUNTING DETAILS

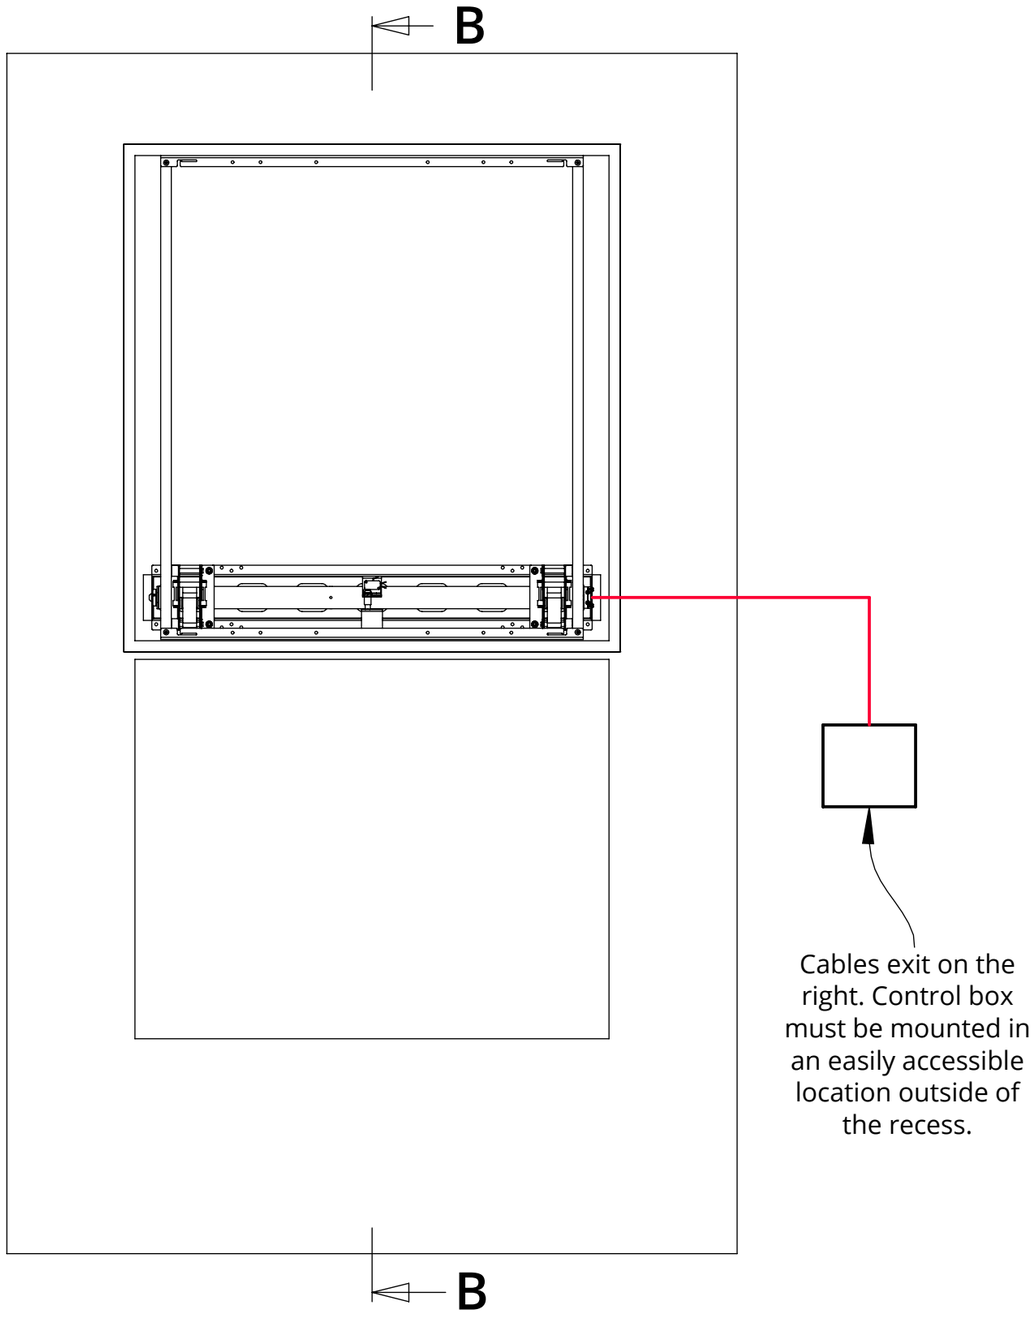

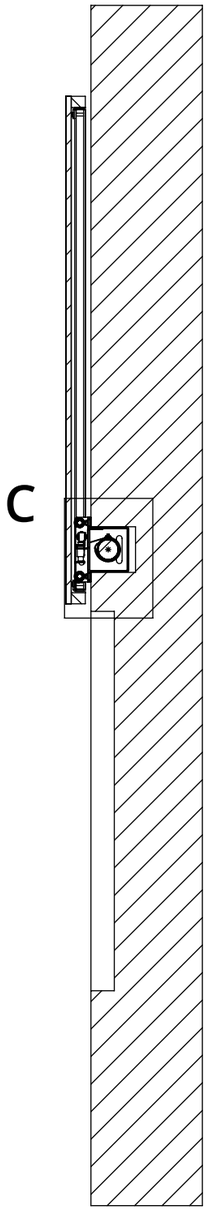

SECTION B-B

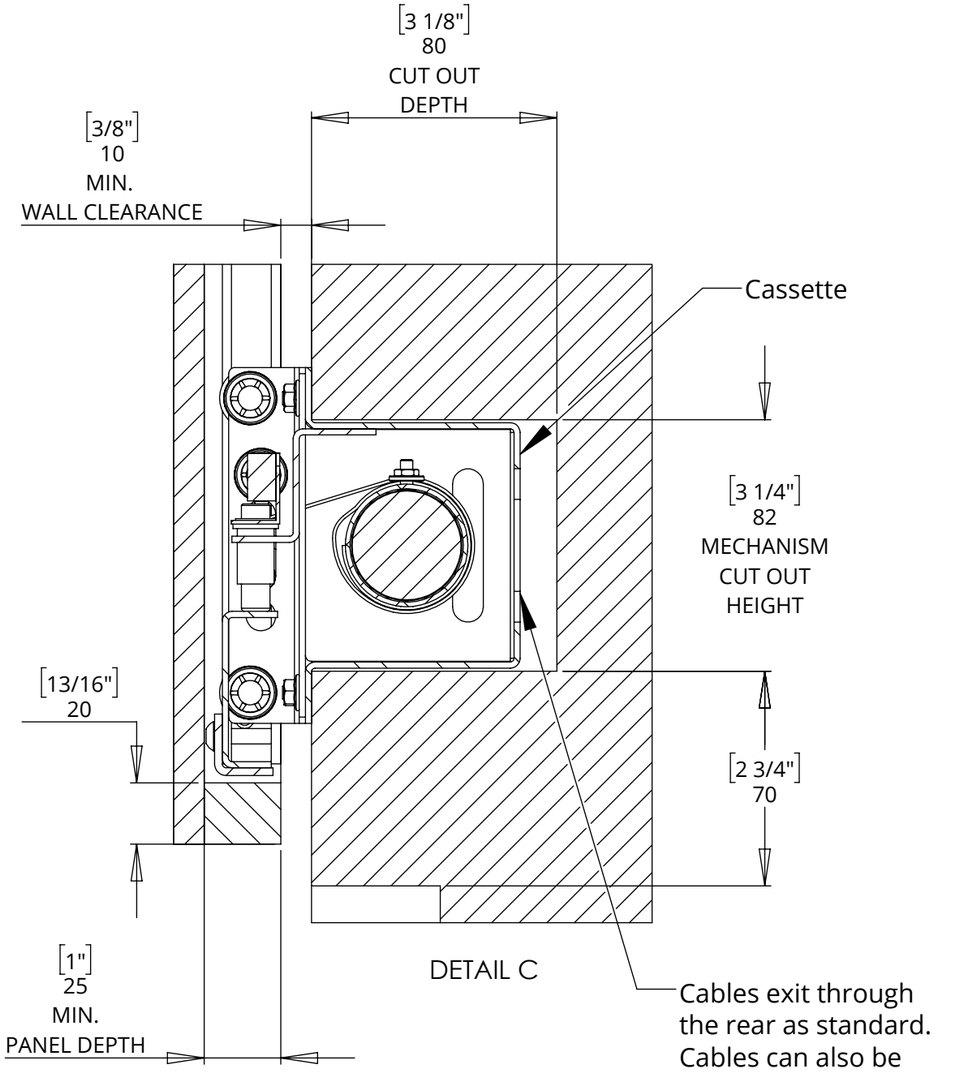


DETAIL C


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 007
SHEET 5

PIC-2
PICTURE LIFT MECHANISM

CONTROL BOX

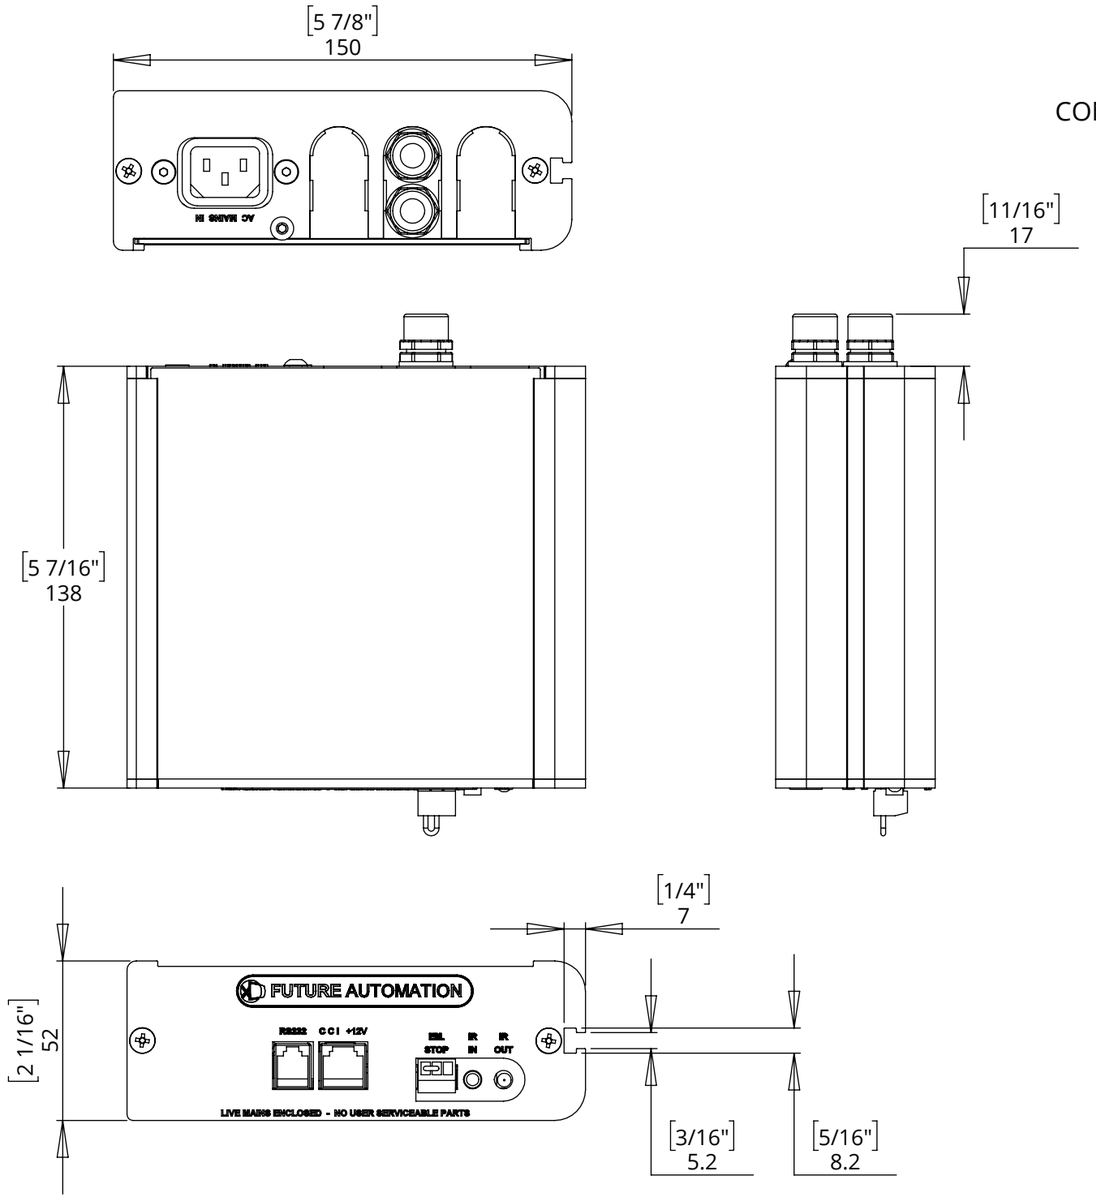

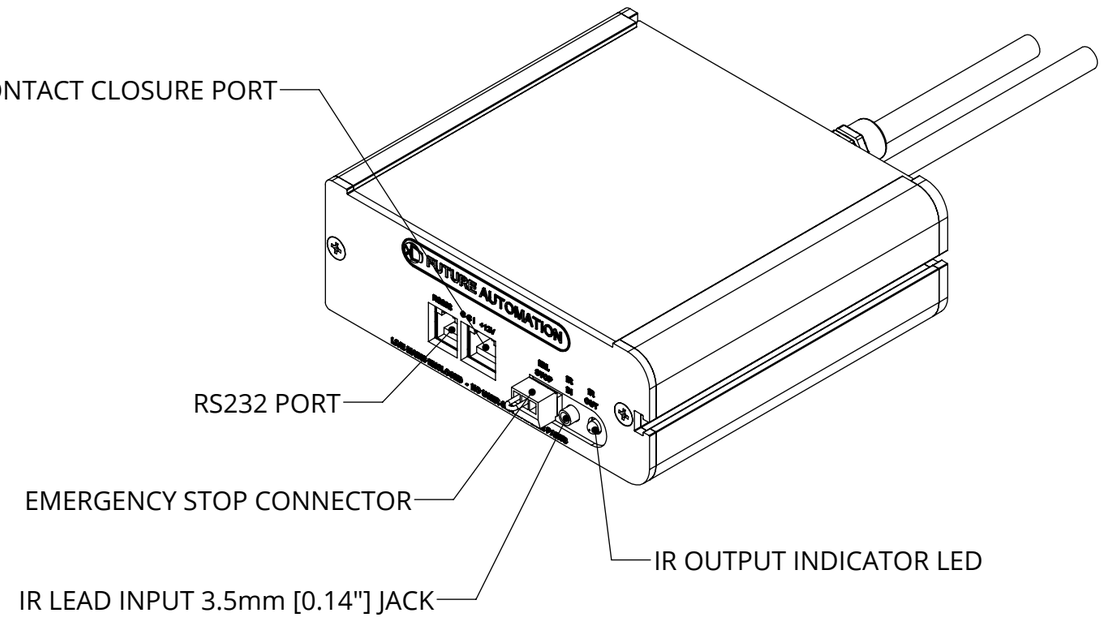

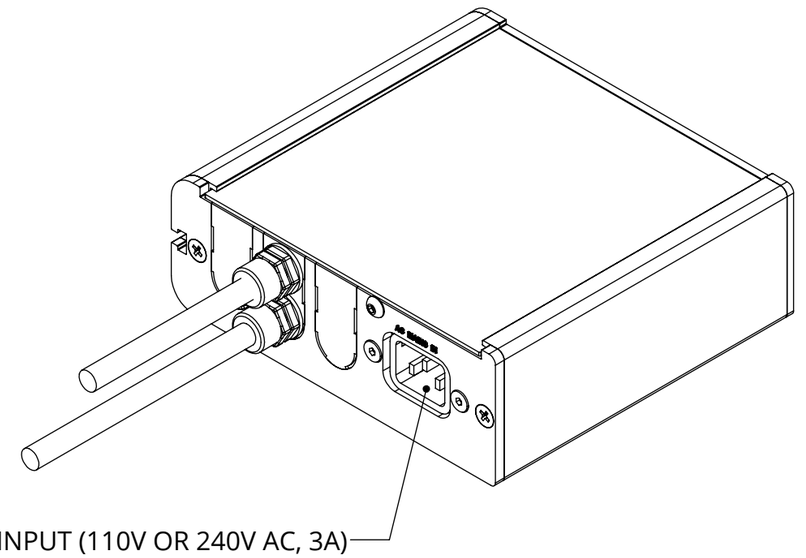

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 2m [78 3/4"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 6