
PIC-3
PICTURE LIFT MECHANISM

future automation

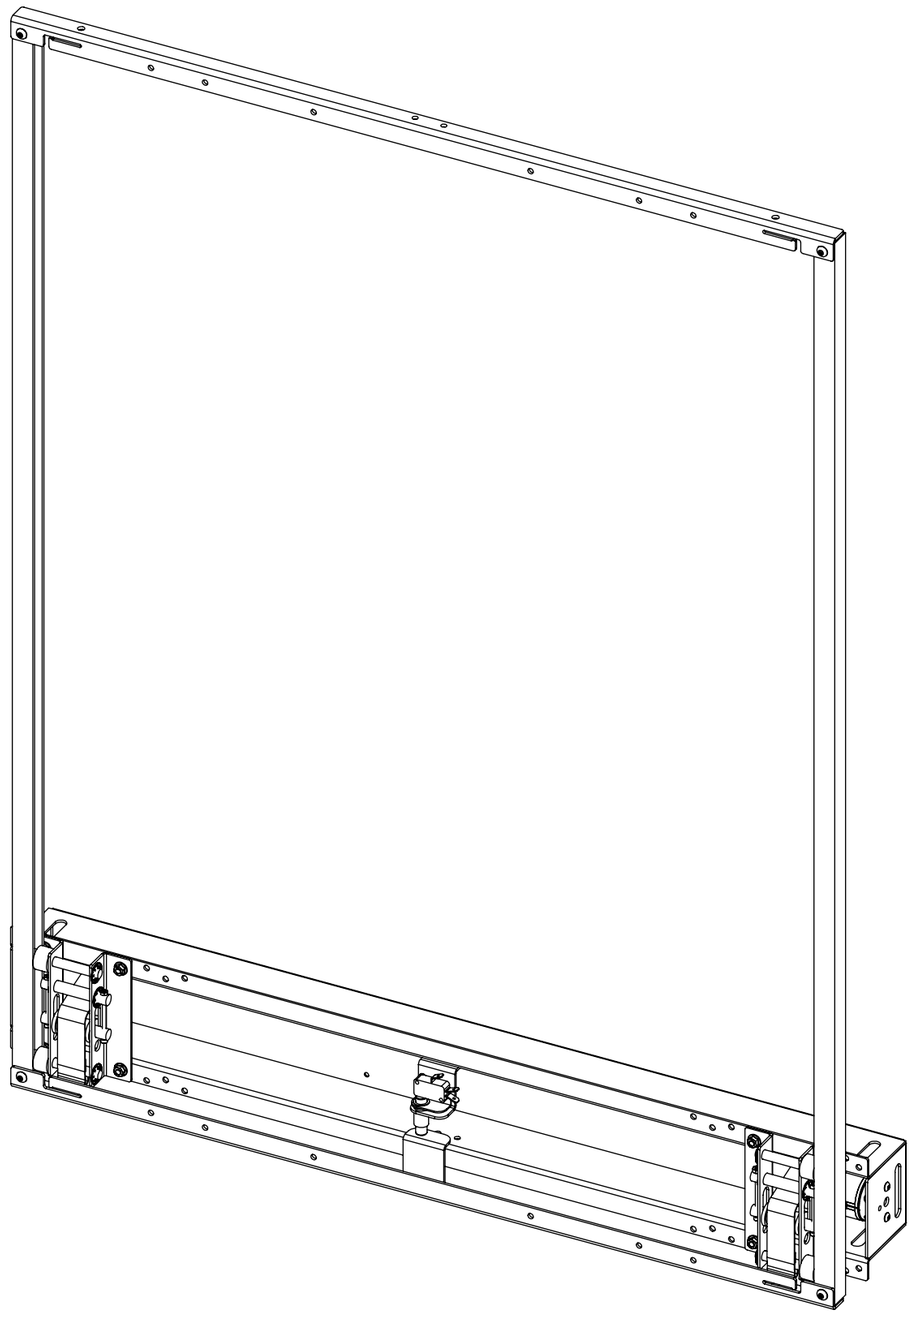

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 1


PIC-3
PICTURE LIFT MECHANISM


future automation


SPECIFICATION	MEASUREMENTS
Product Dimensions (H x W x D)	1018mm (40 1/16") x 797mm (31 3/8") x 102mm (4")
Maximum Weight Capacity	10Kg (22lb)
Maximum Travel	860mm (33 7/8")
Product Weight	7Kg (15lb)
Packaging Dimensions	980mm (38 9/16") x 300mm (11 13/16") x 210mm (8 1/4")
Shipping Weight	11Kg (24lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	110W
Power Consumption Standby	3W
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Marine suitable version
Package Contents	Mechanism, IR remote control
Marine Suitable	No


PIC-3
PICTURE LIFT MECHANISM

GENERAL DIMENSIONS

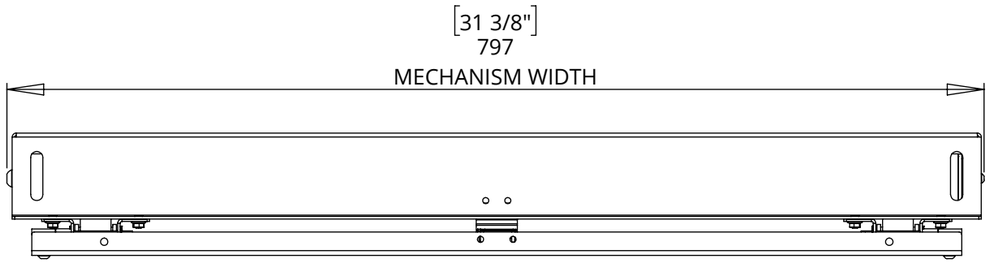

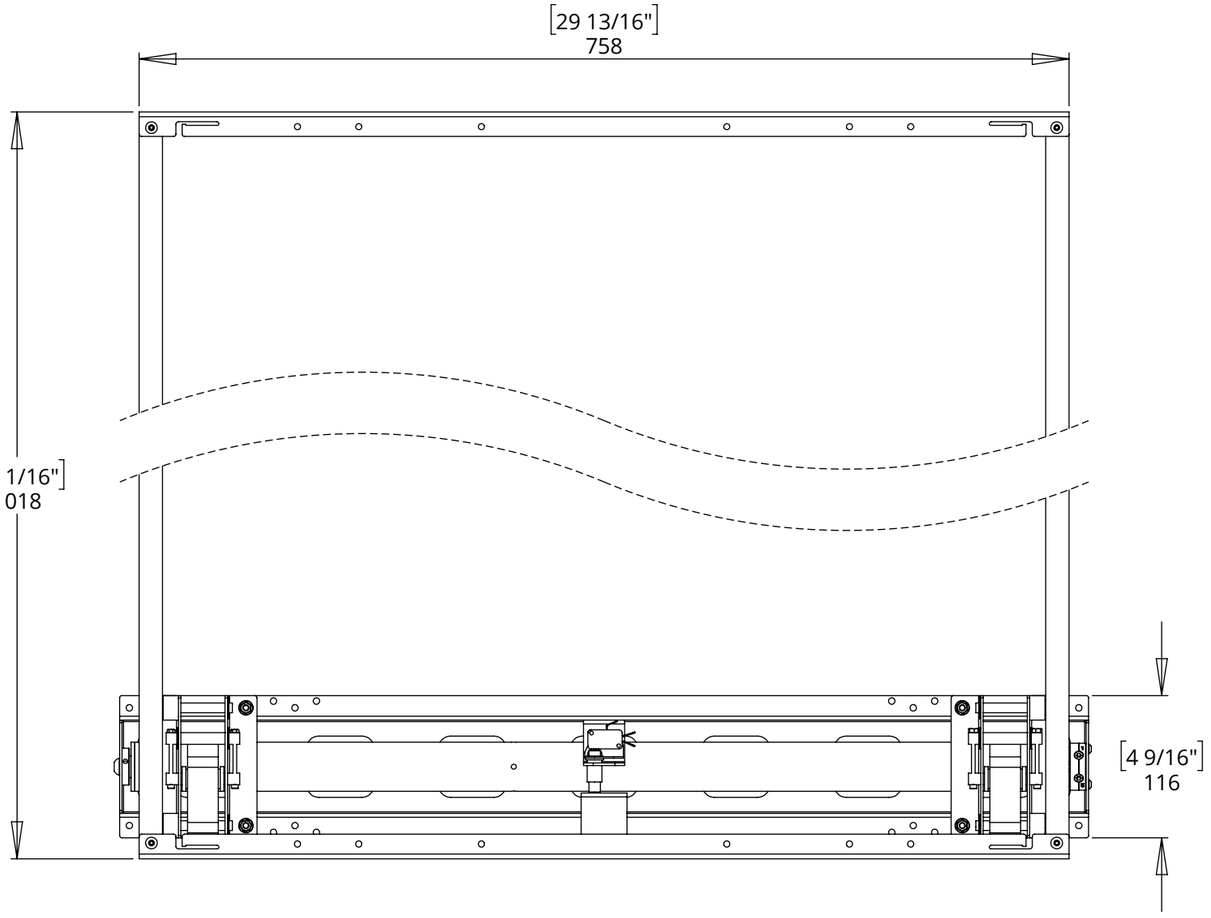

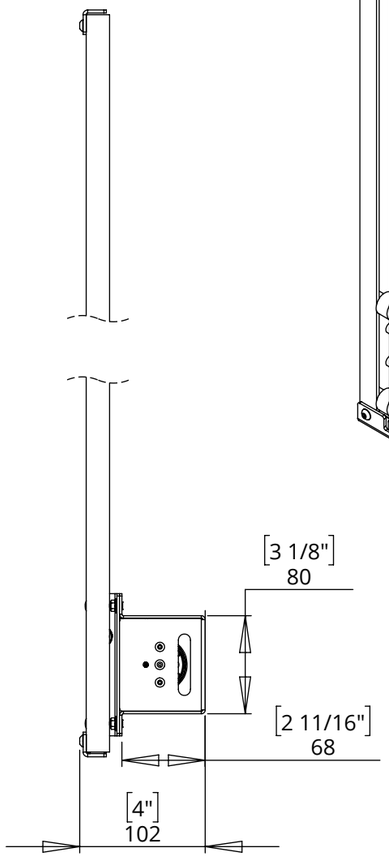

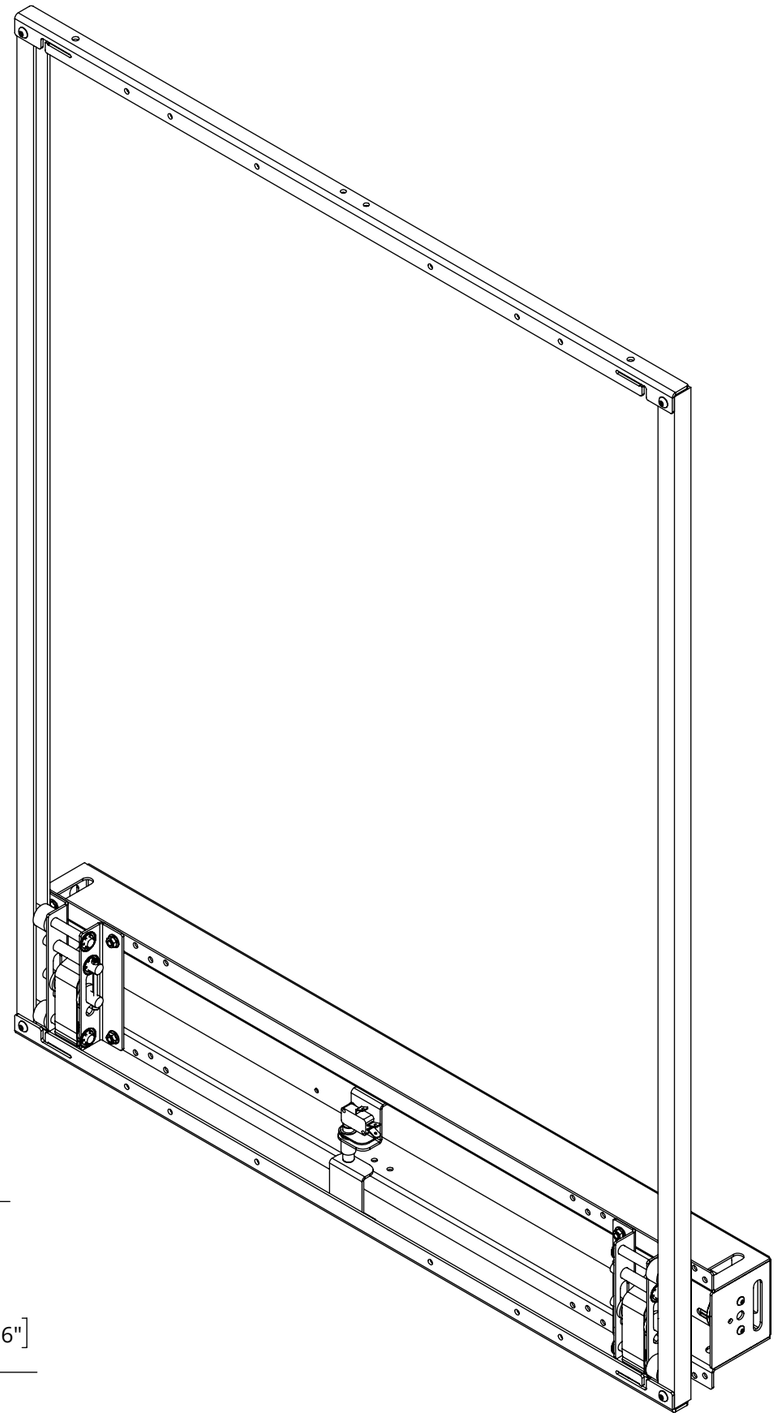


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 007
SHEET 3


PIC-3
PICTURE LIFT MECHANISM

MECHANISM DETAILS

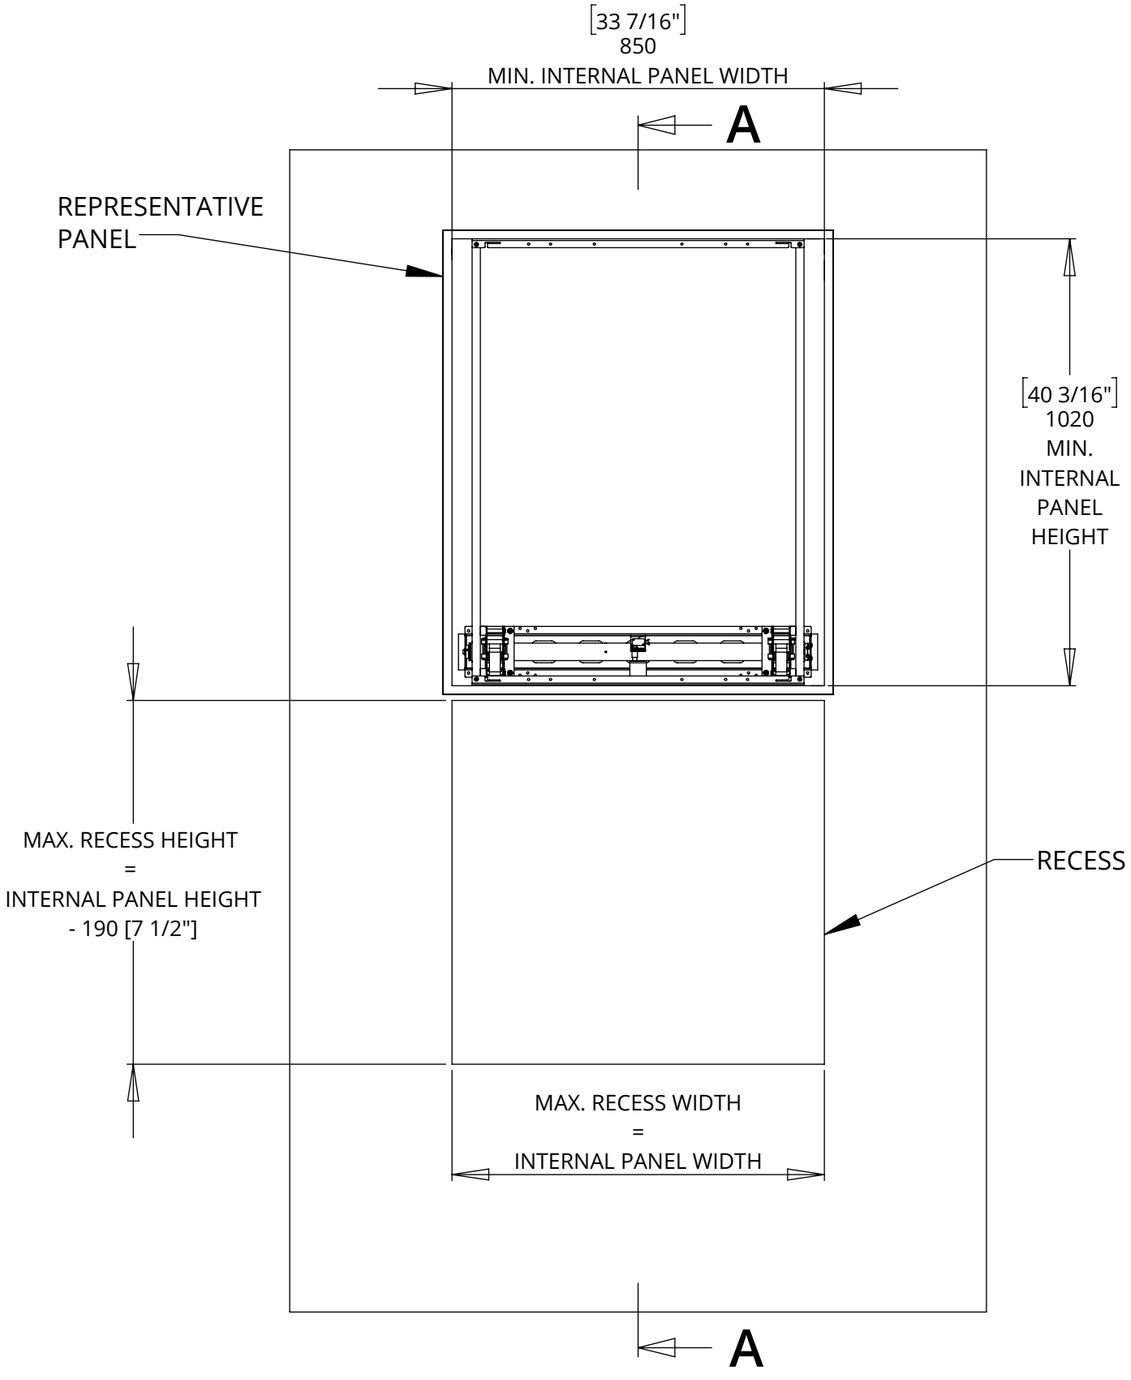

UP POSITION

DOWN POSITION

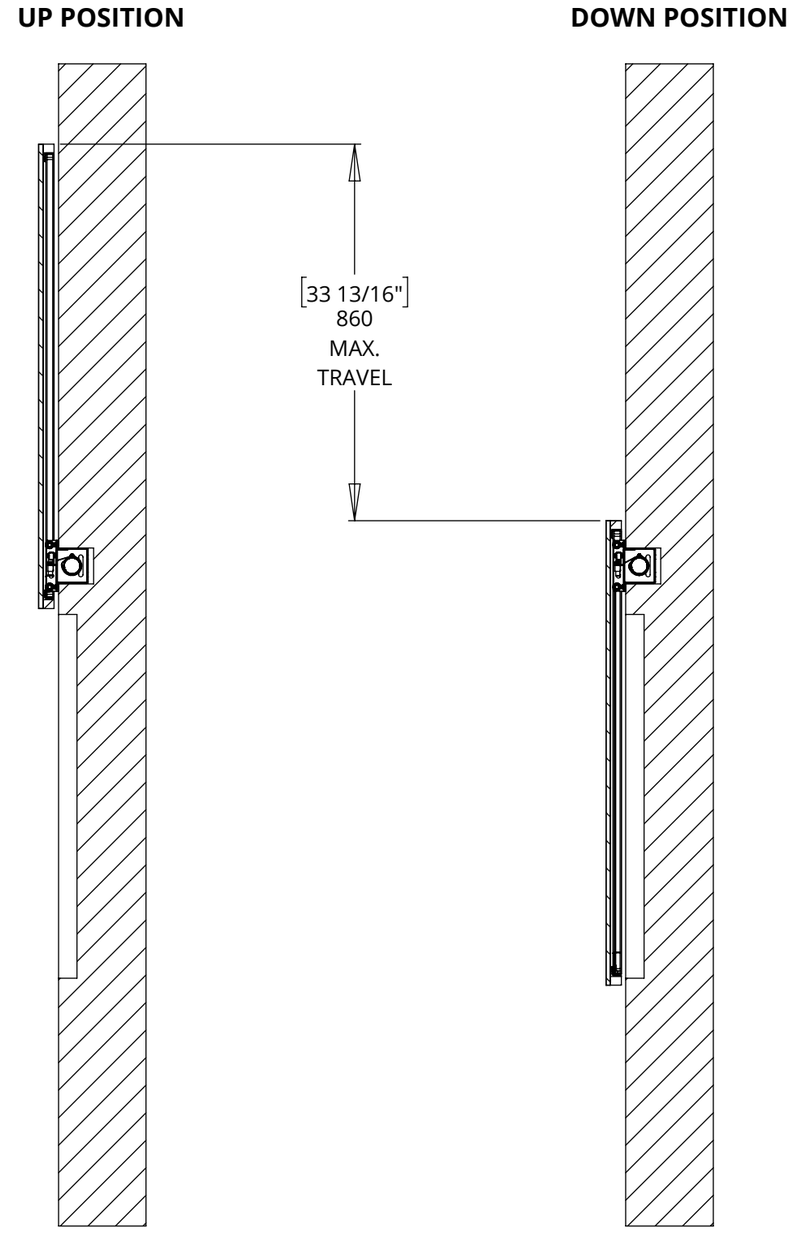


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 007
SHEET 4

PIC-3
PICTURE LIFT MECHANISM


MOUNTING DETAILS

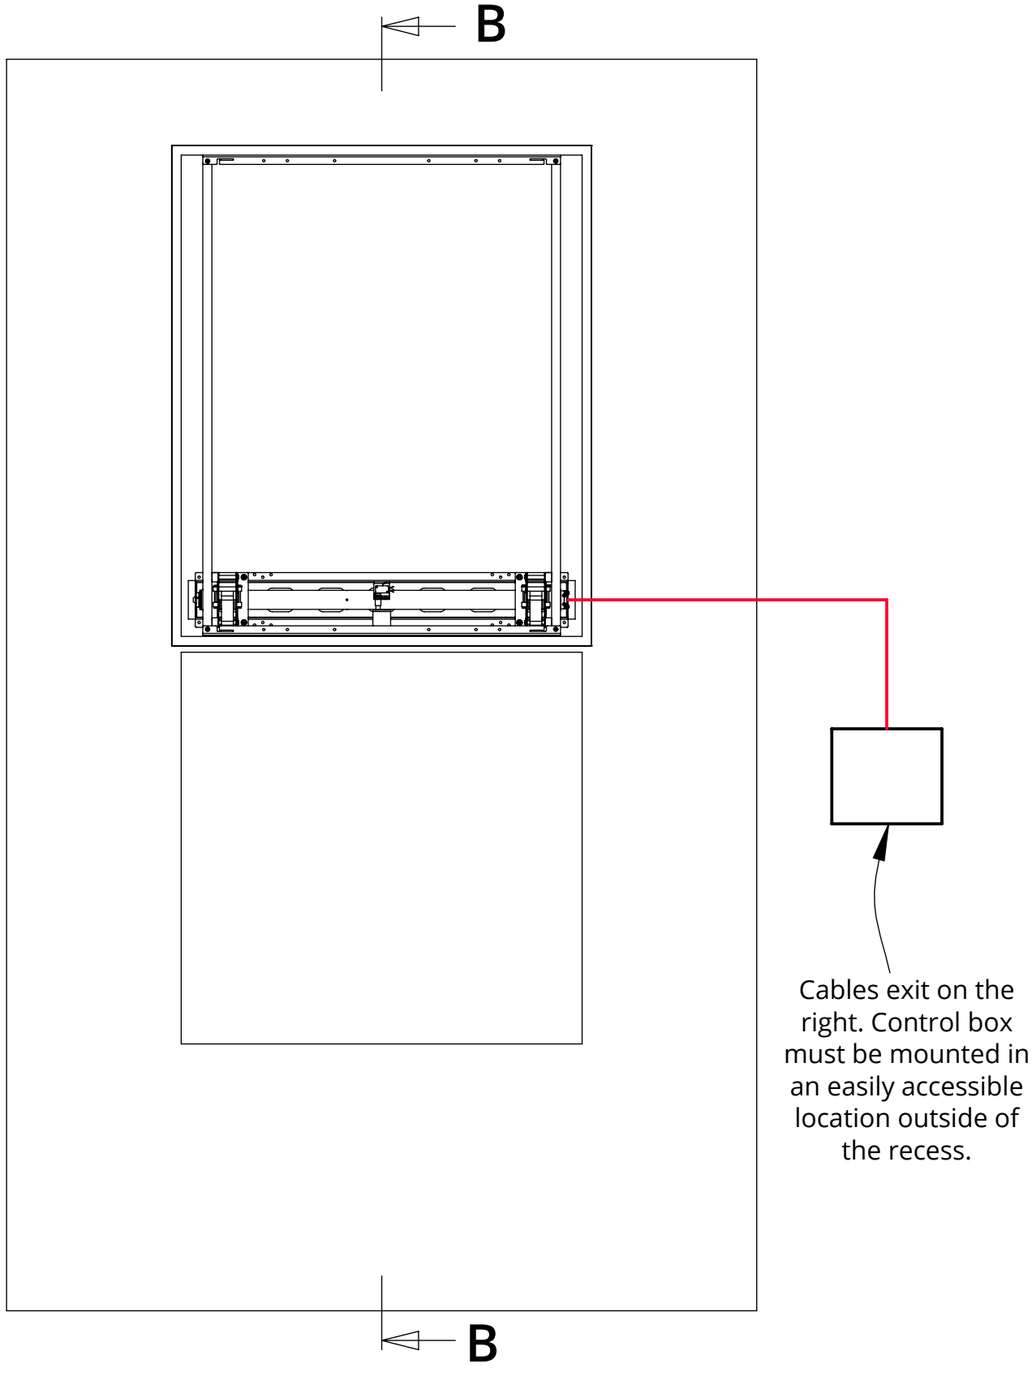

Cables exit on the right. Control box must be mounted in an easily accessible location outside of the recess.

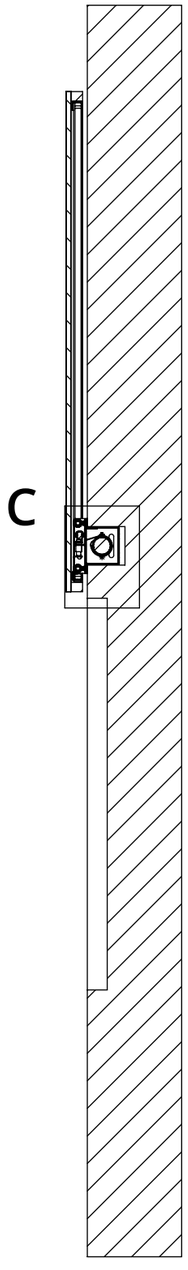

SECTION B-B

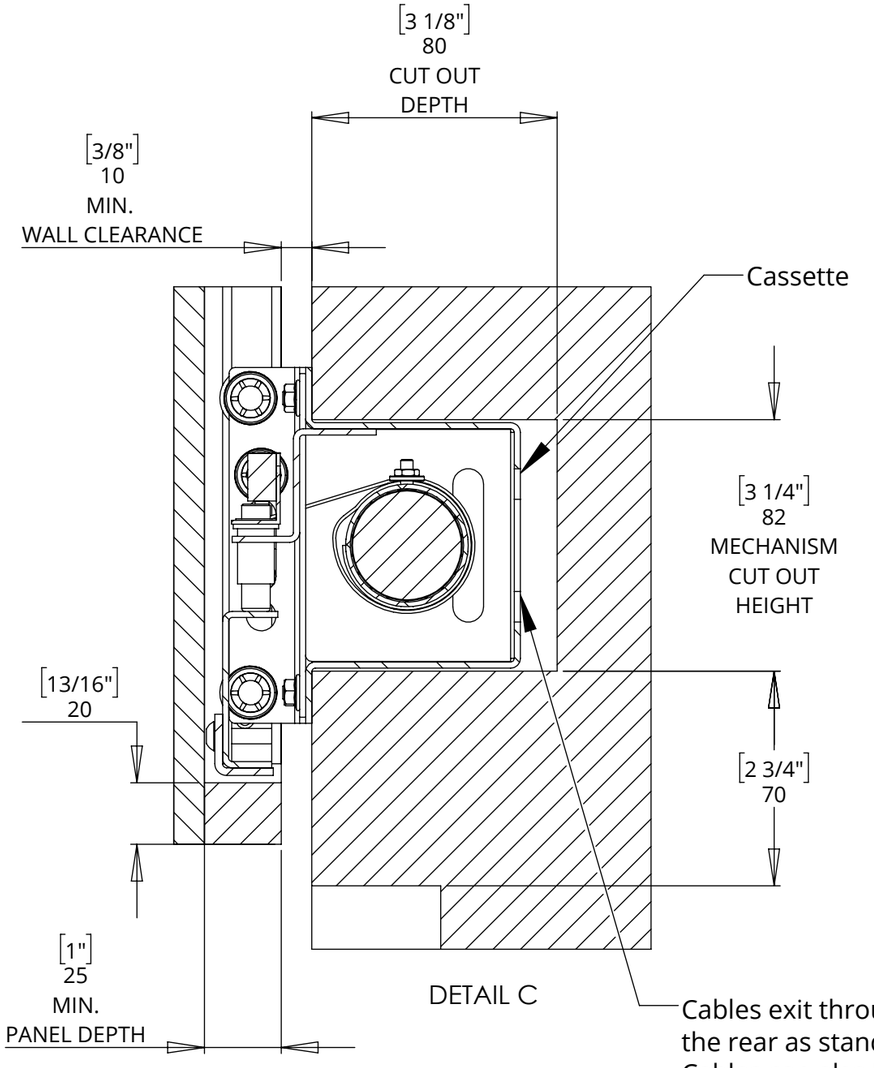

DETAIL C


Cables exit through the rear as standard. Cables can also be routed through the top or bottom faces of the cassette.


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 007
SHEET 5

PIC-3
PICTURE LIFT MECHANISM

CONTROL BOX

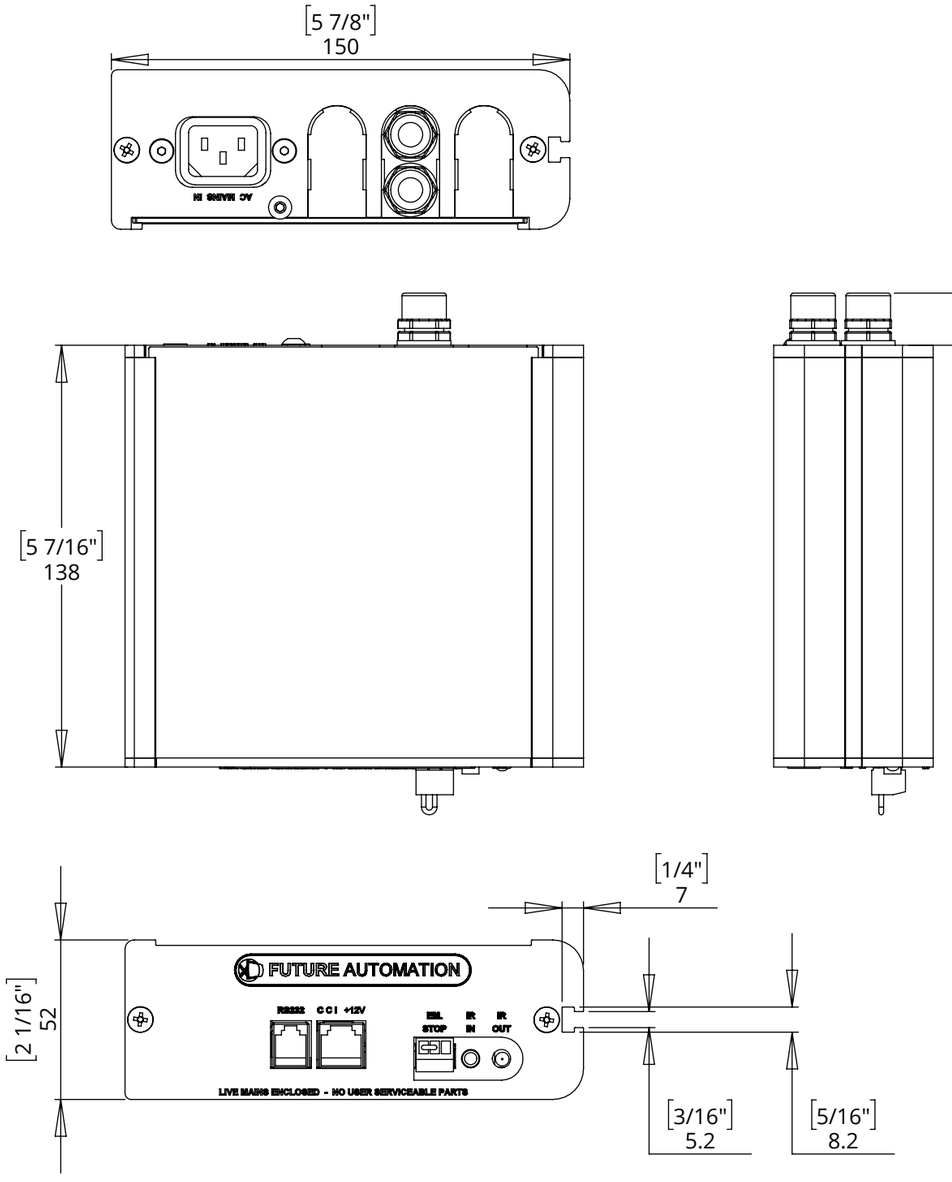

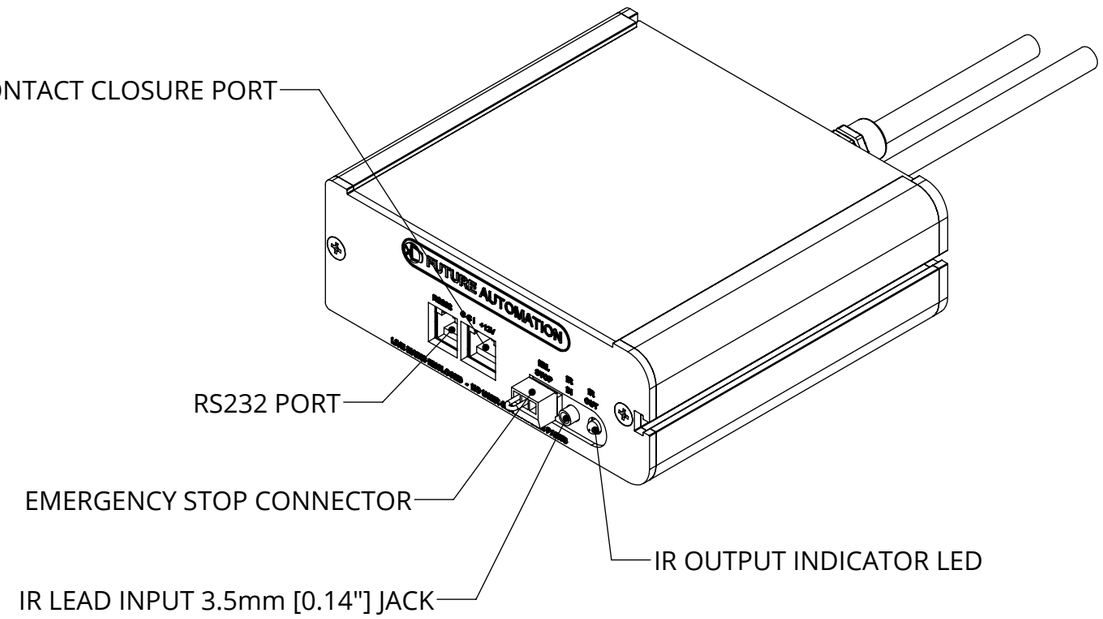

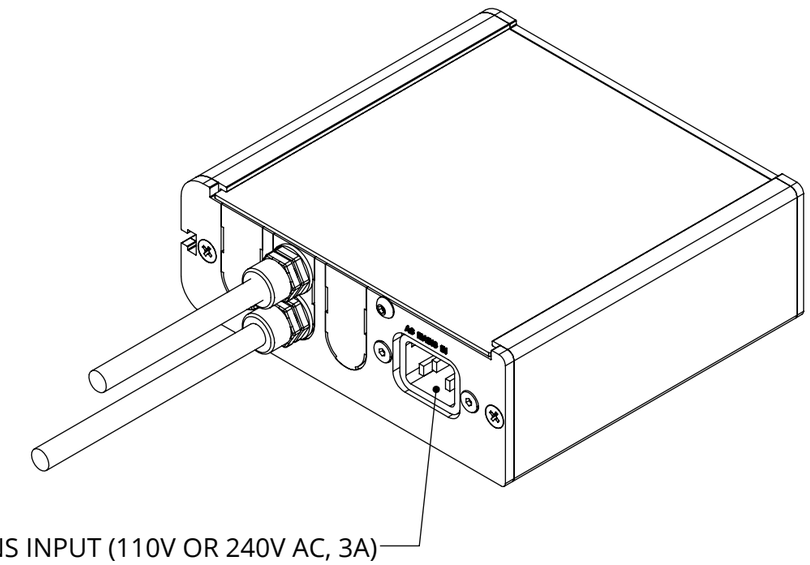

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 2m [78 3/4"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].