
SM-BEAM
SONOS BEAM SPEAKER BRACKET

future automation

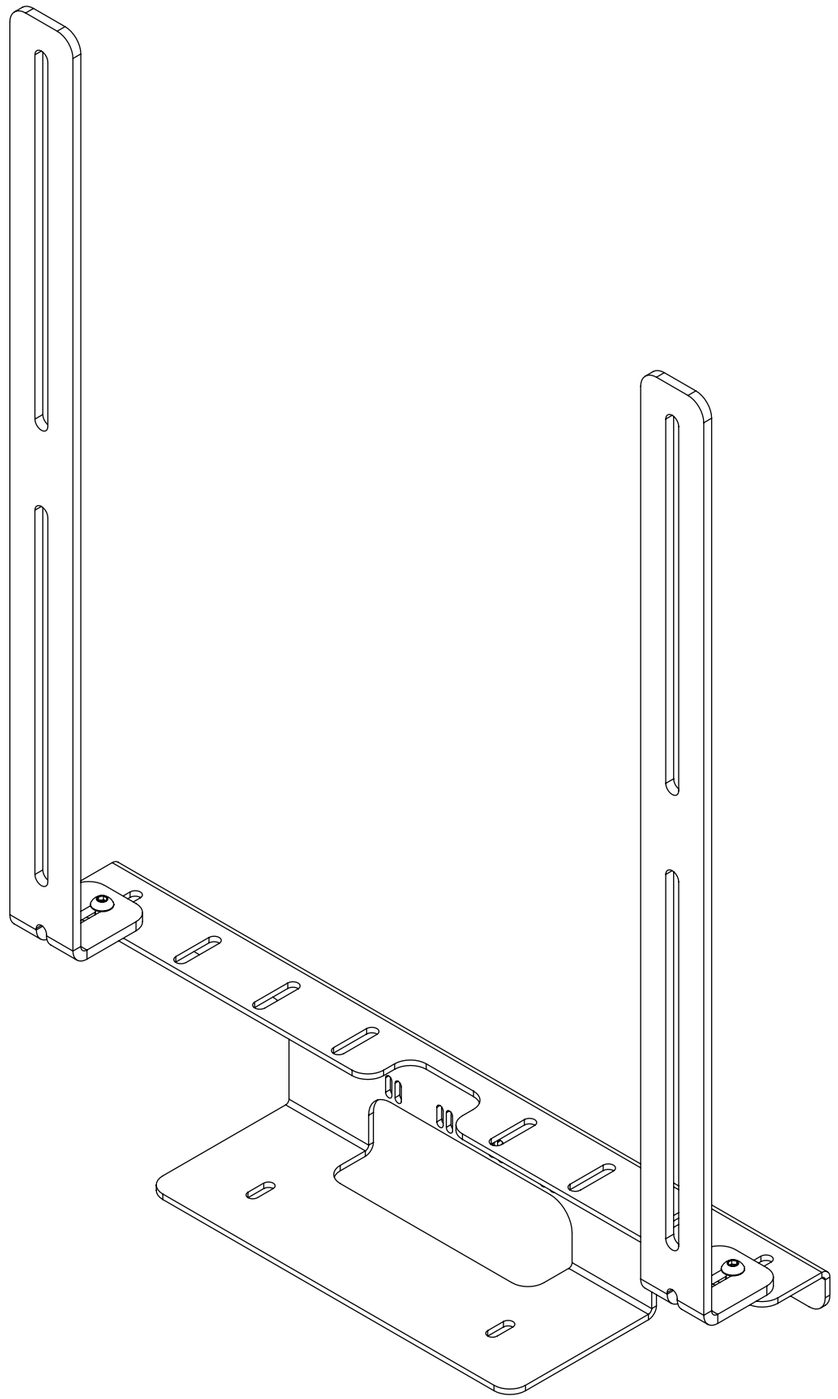

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 004
SHEET 1

SM-BEAM
SONOS BEAM SPEAKER BRACKET

future automation


SPECIFICATION	MEASUREMENTS
Max depth adjustments	46.5mm (1.8'')
Weight	2.65Kg (5.84lb)
Speaker Dimensions HxWxD	68.5mm (2.70'') x 651mm (25.625'') x 100mm (3.94'')
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Package Contents	Mechanism
Marine Suitable	Yes (Indoor)
Product Options / Features	Specific to BEAM Sonos speaker

SM-BEAM
SONOS BEAM SPEAKER BRACKET

MOUNTING CONFIGURATIONS


1.

30mm is the minimum depth TV that would ensure the front screen sits flush with the front of the speaker.

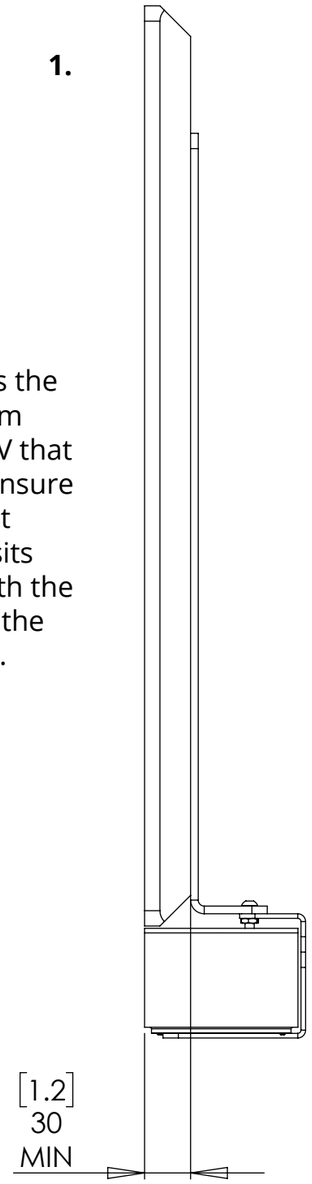


2.

62mm is the maximum depth TV that would ensure the front screen sits flush with the front of the speaker and flush to the top of the speaker.

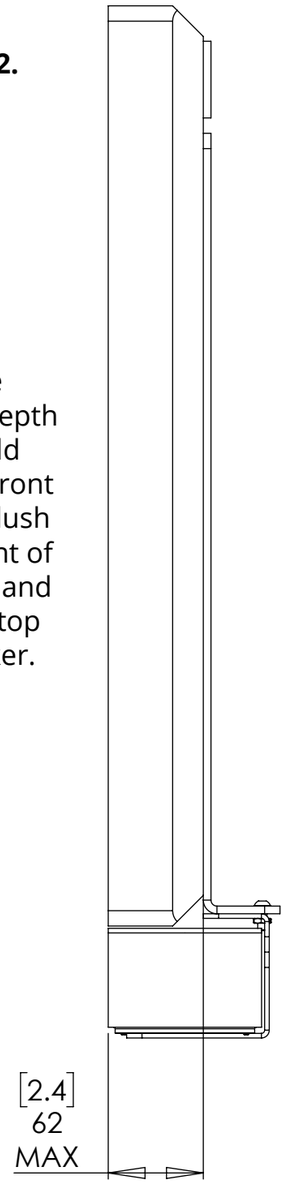


3.


76.5mm is the maximum depth TV that would ensure the front screen sits flush with the front of the speaker. A gap of 12mm will however be between the TV and the top of the speaker.

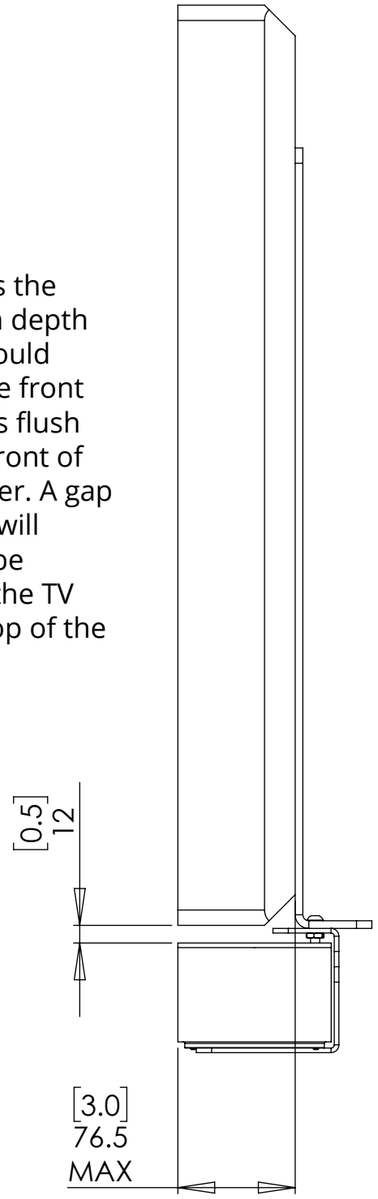


1.

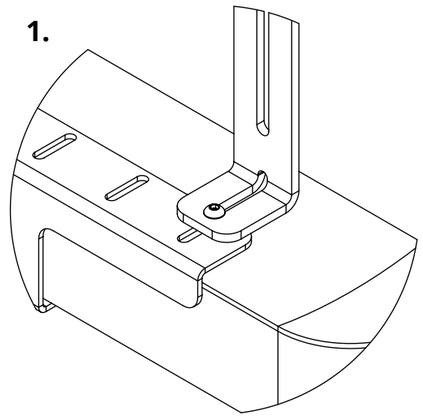

2.

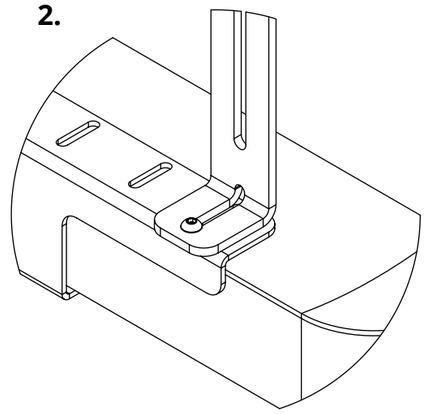

3.

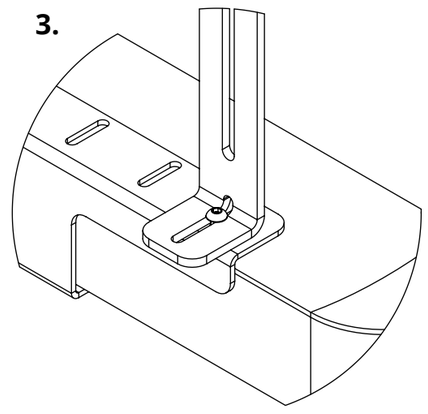


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 004
SHEET 3


SM-BEAM
SONOS BEAM SPEAKER BRACKET

future automation

DIMENSIONS

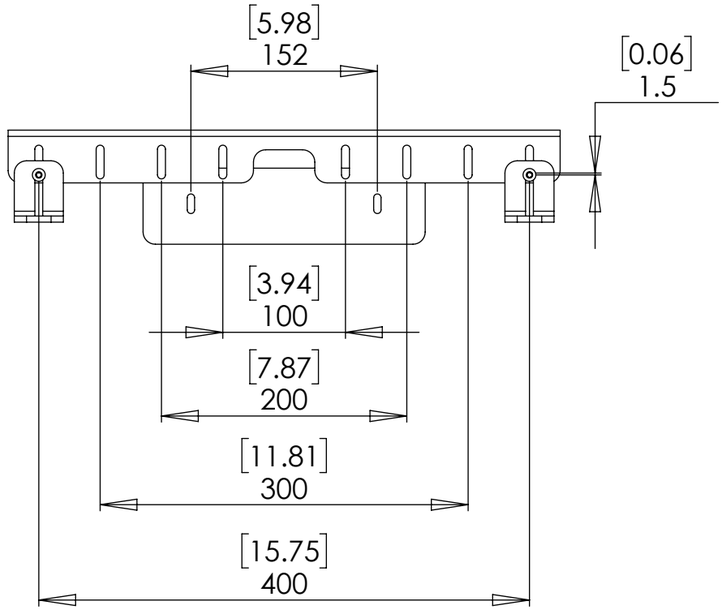

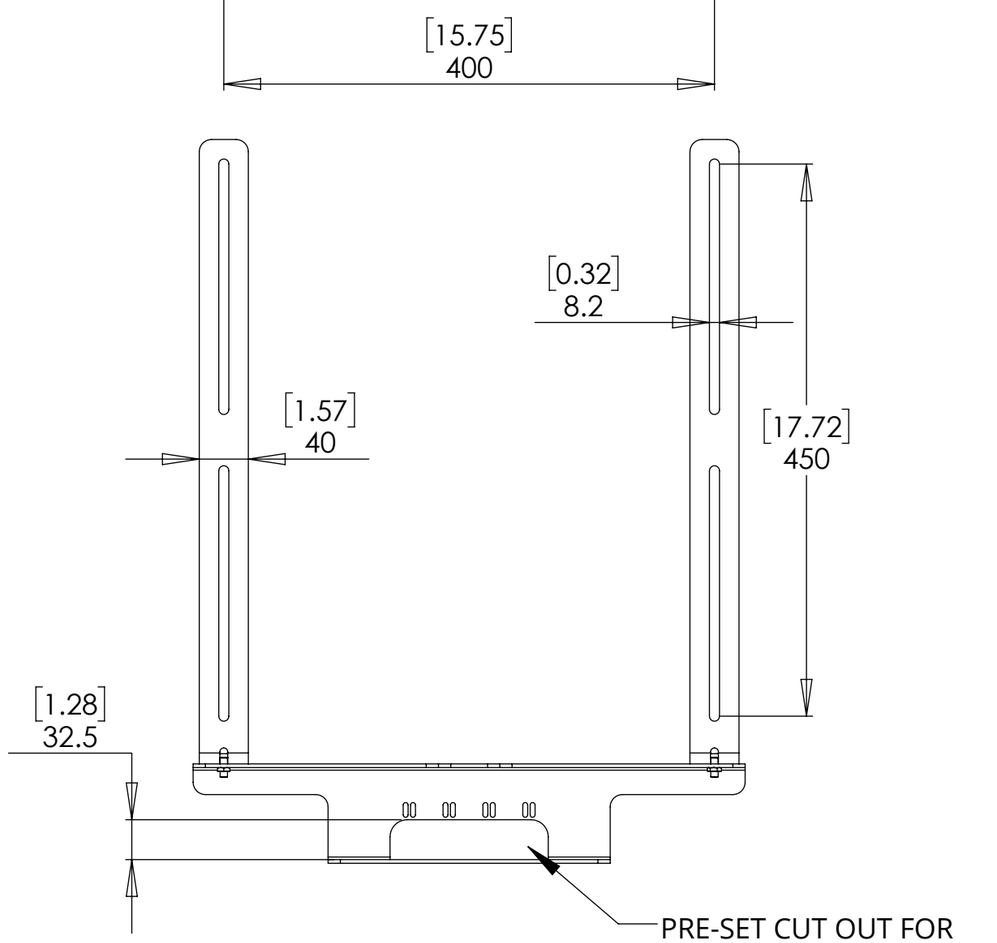

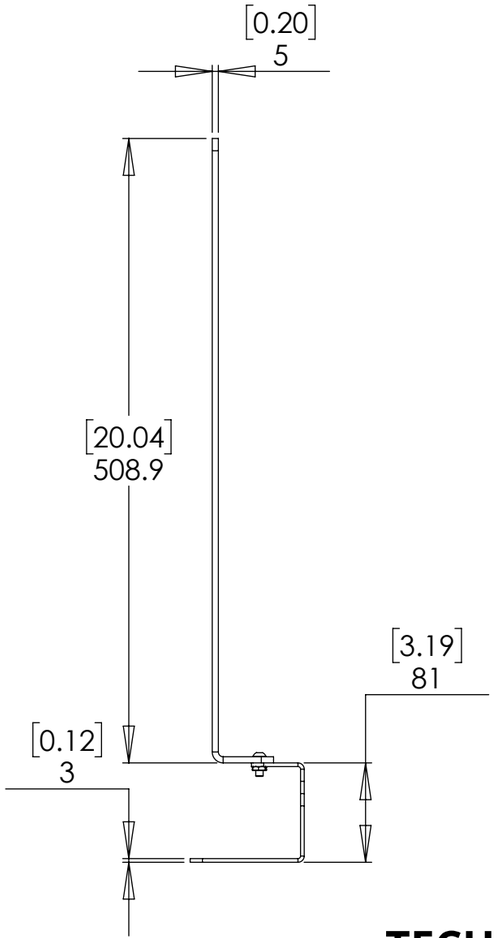


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 004
SHEET 4


SM-BEAM
SONOS BEAM SPEAKER BRACKET

PRODUCT CONFIGURATIONS

PS55 (Plasma Screen 55'' Mount) Example

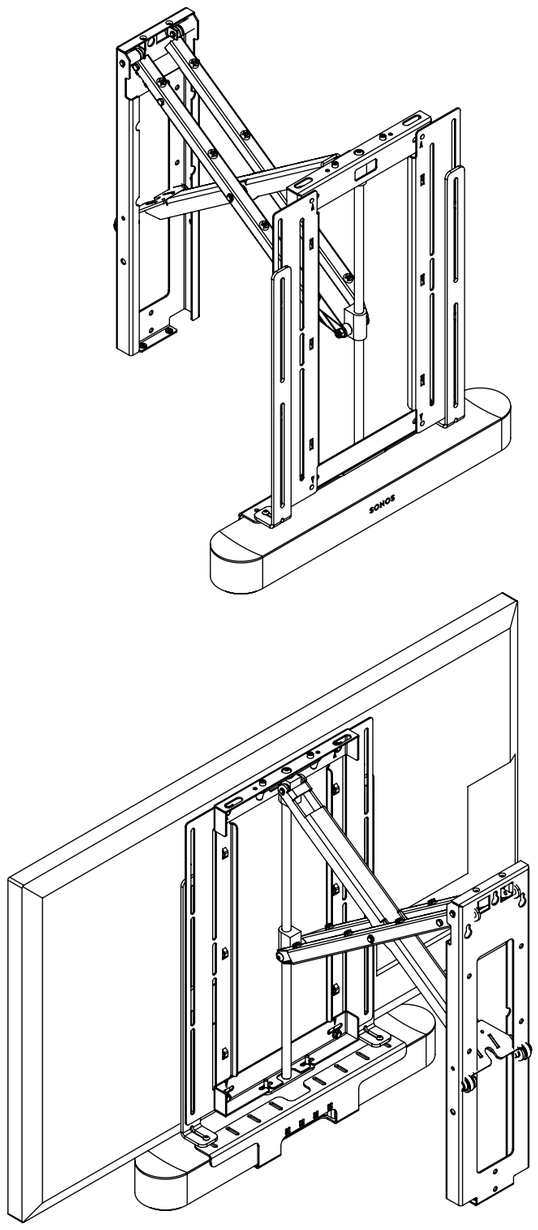

PSE90 (Plasma Swivel Electric) Example

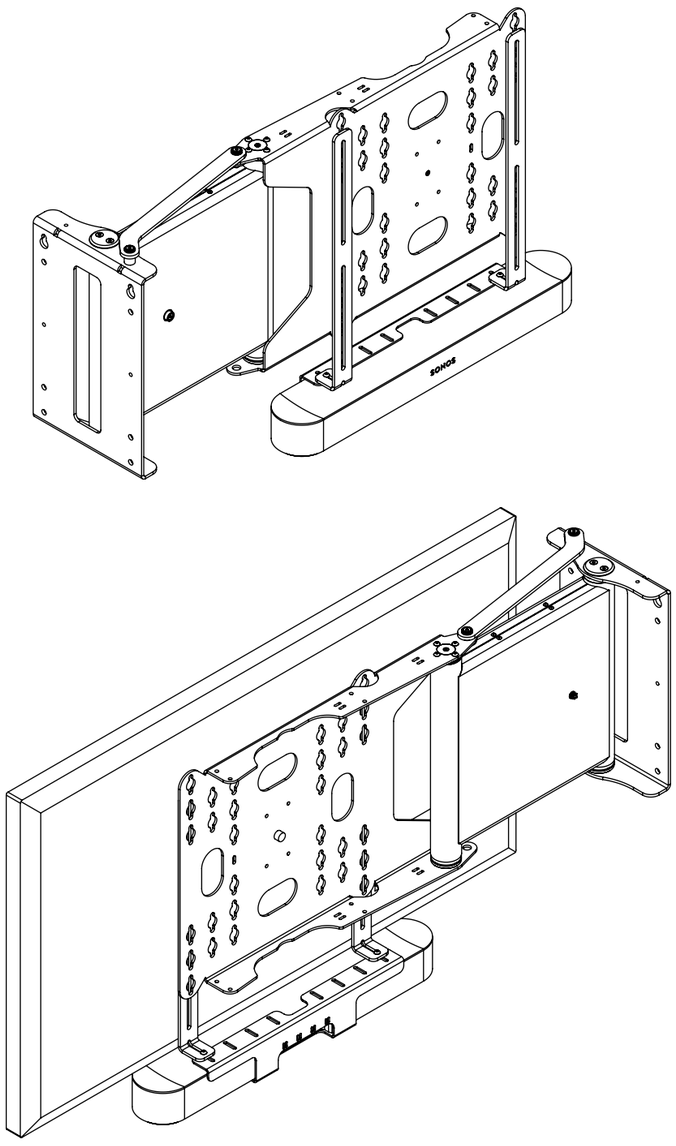

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 004
SHEET 5