
WB-DA1
WALL BOX FOR DA1

future automation

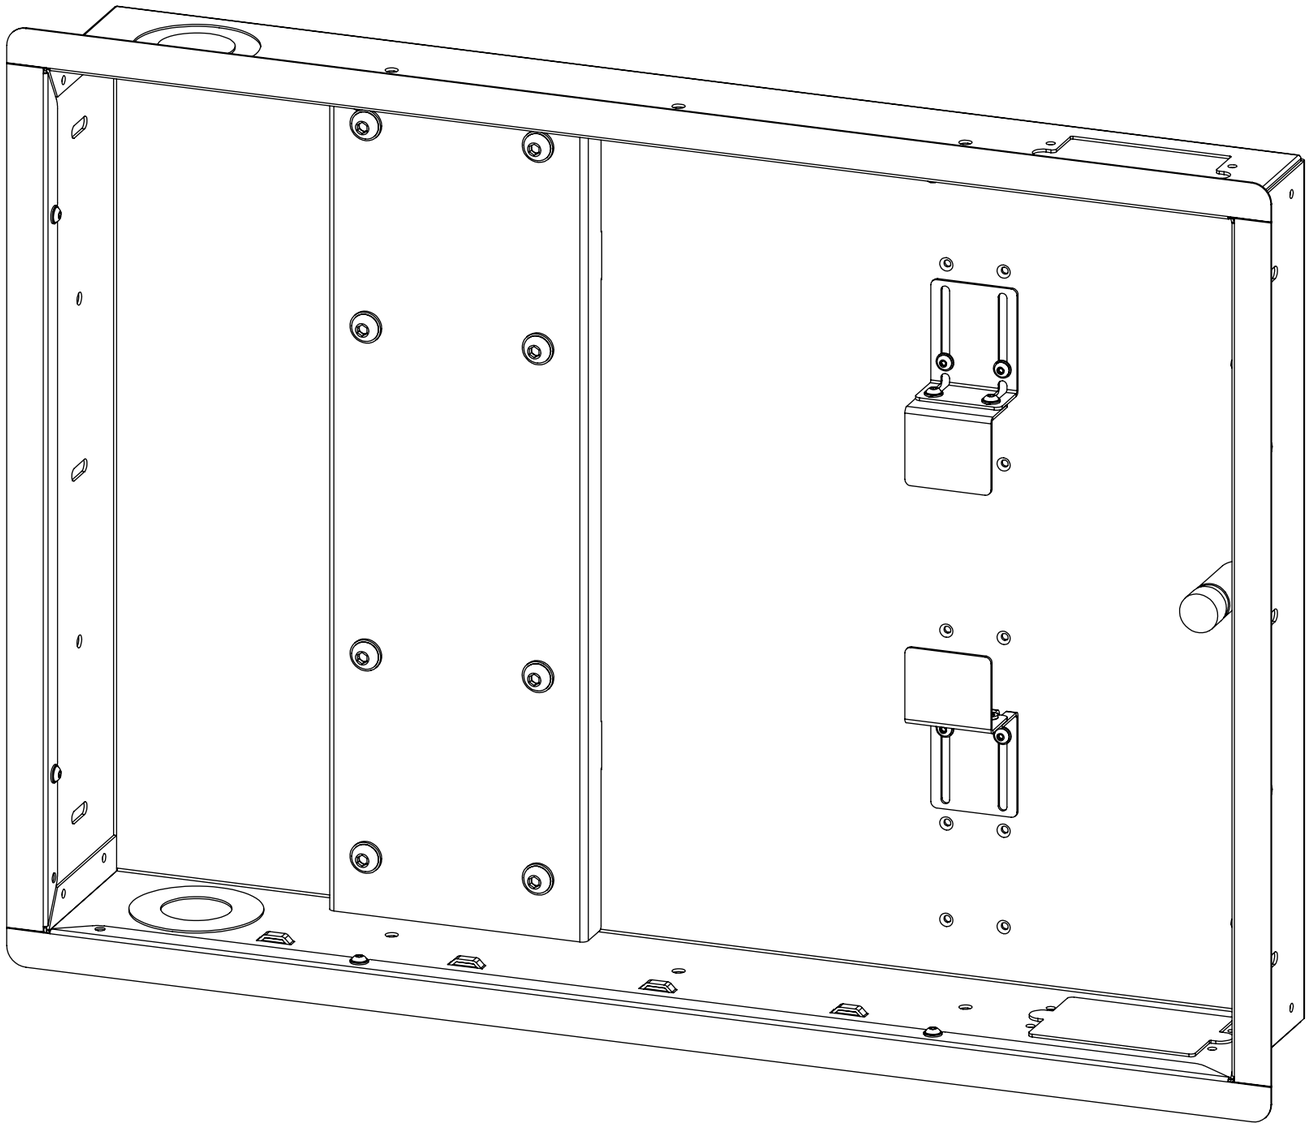

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 1

WB-DA1
WALL BOX FOR DA1

future automation


SPECIFICATION	MEASUREMENTS
Product Dimensions (WxHxD)	661mm (26 1/2") x 487mm (19 3/16") x 99mm (3 7/8")
Product Weight	8kg (18lb)
Packaging Dimensions	880mm (34 5/8") x 800mm (31 1/2") x 220mm (8 11/16")
Shipping Weight	9kg (20lb)
Mounting Patterns Supported	VESA 400, 300, 200, 100 W x 400, 300, 200, 100 H
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	1x Wall Box, 1x Pair of Accessory Clamps, 1x Buffer Stop, 2x Horizontal Wall Trim Strips , 2x Vertical Wall Trim Strips & Bolt Pack
Marine Suitable	No

WB-DA1
WALL BOX FOR DA1


ACCESSORY MOUNTING


The WB-DA1 features easily adjustable accessory clamps and mounting space for AV accessories.

To access the mounting space, the DA1 must first be moved to the out position.

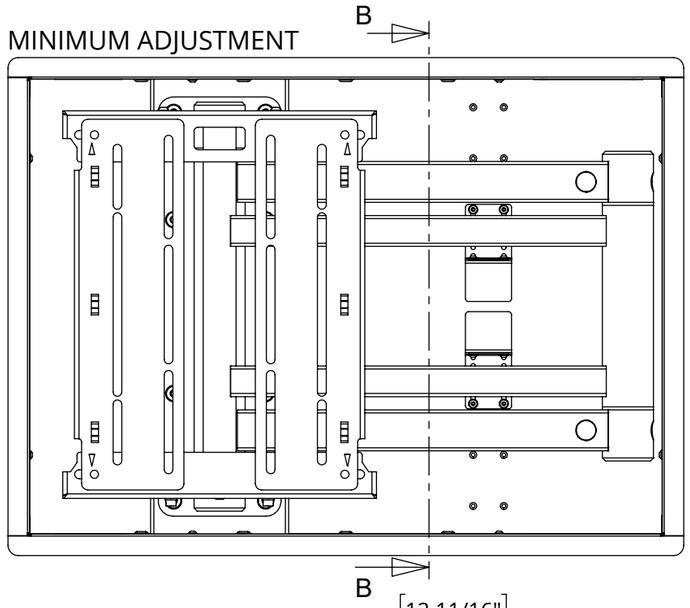


SECTION D-D

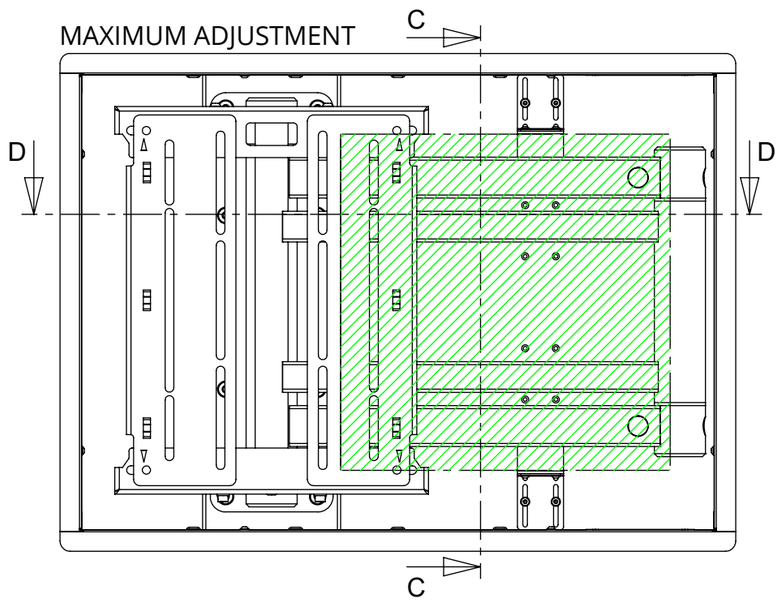

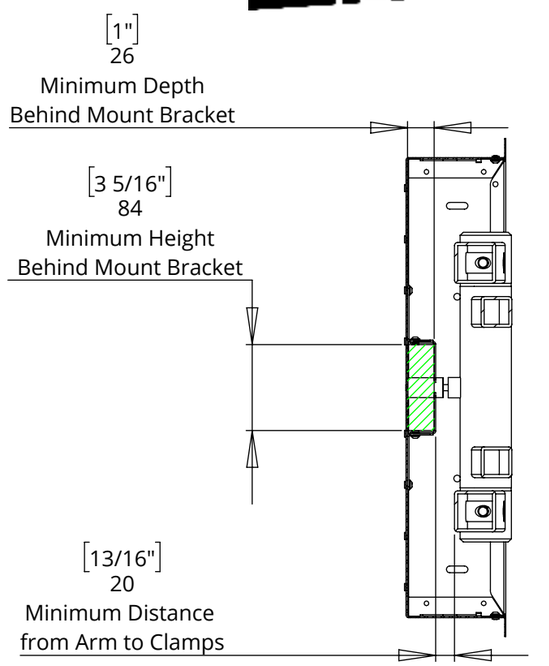

SECTION B-B

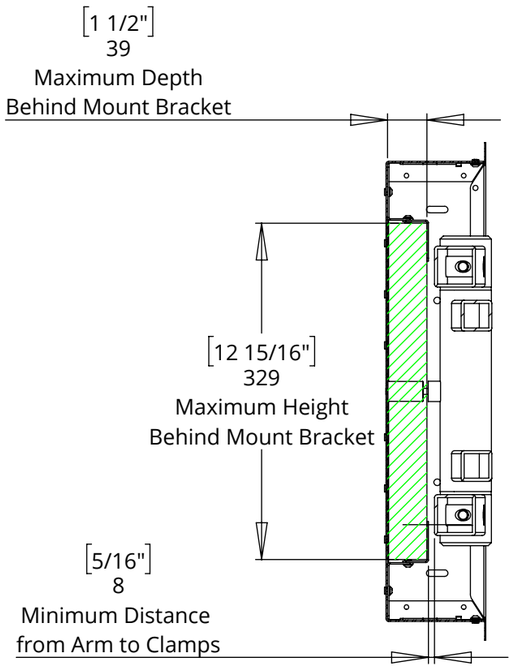

SECTION C-C


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 003
SHEET 3

WB-DA1
WALL BOX FOR DA1

CABLE ROUTING

Cables can be run along the top or bottom arms as shown.
Secure the cables using cable ties and make sure to allow slack at pivot points.

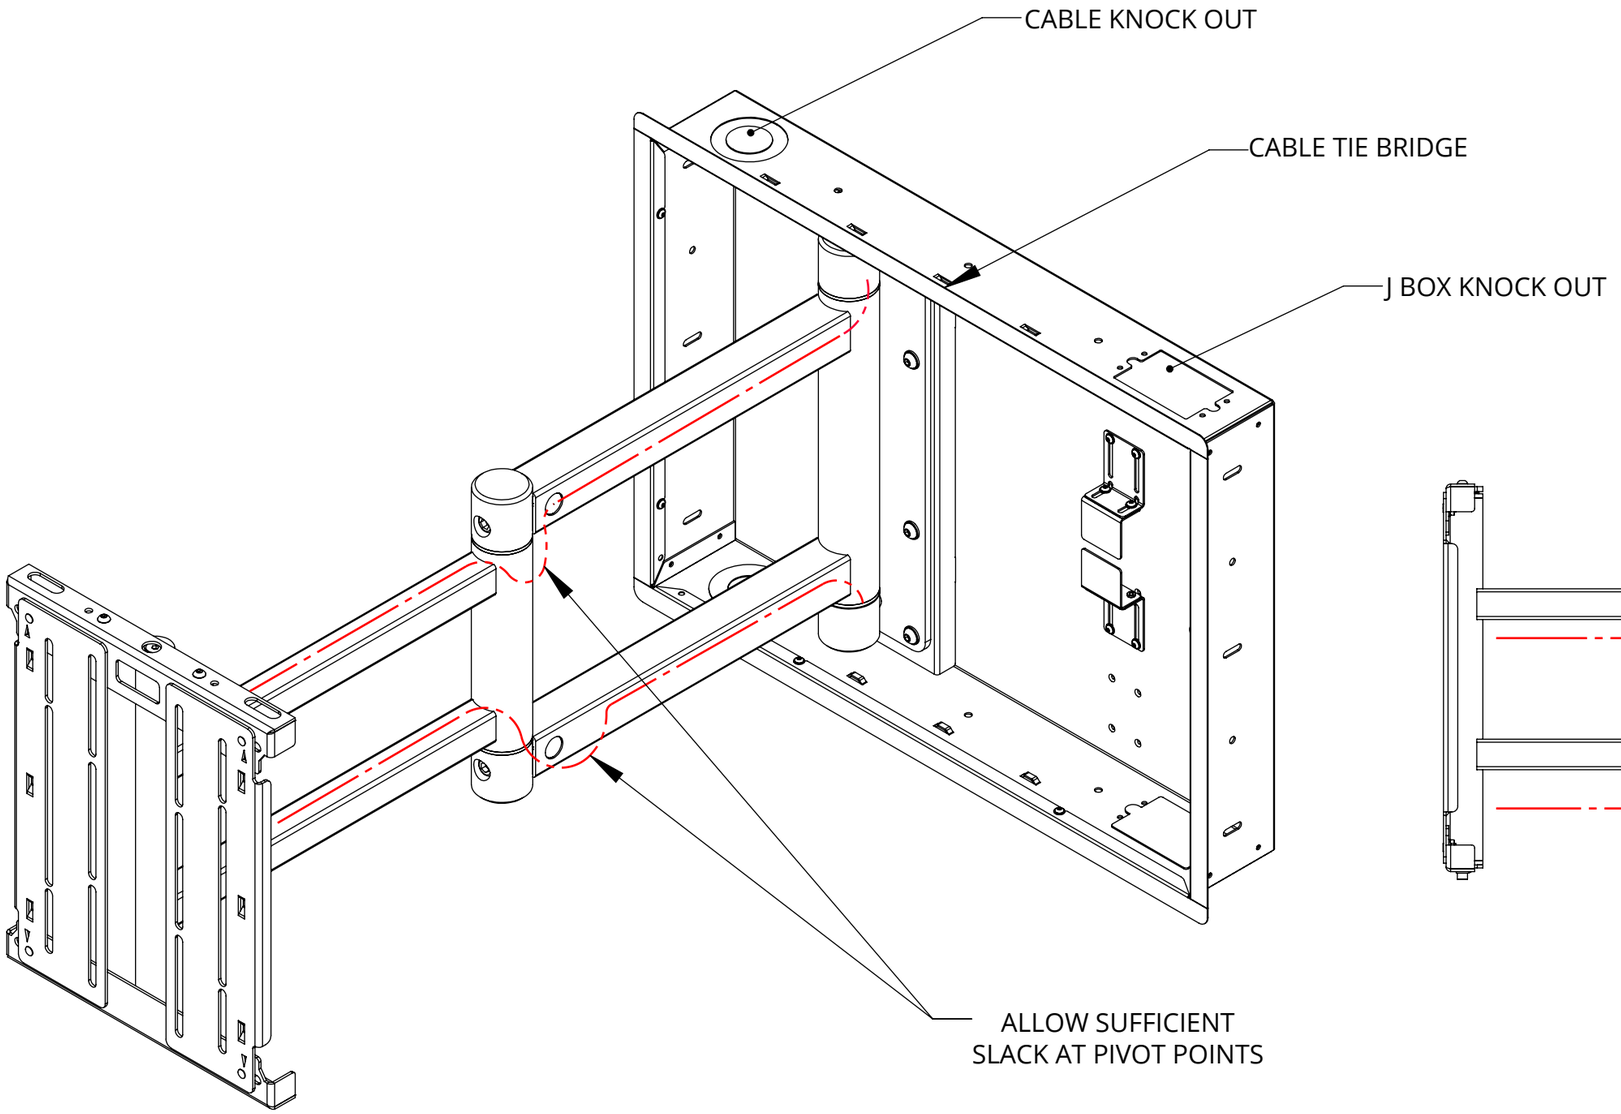

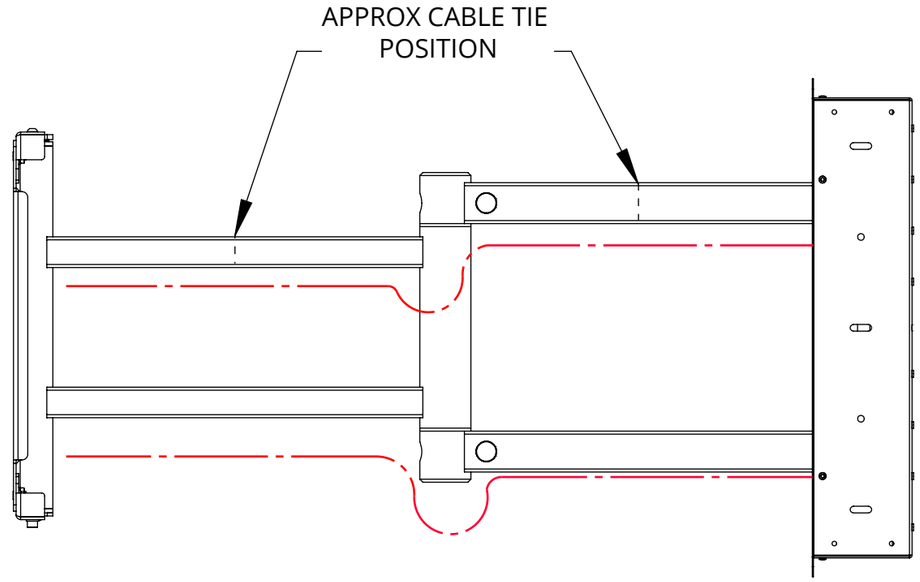


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


WB-DA1
WALL BOX FOR DA1

GENERAL DIMENSIONS

IN POSITION

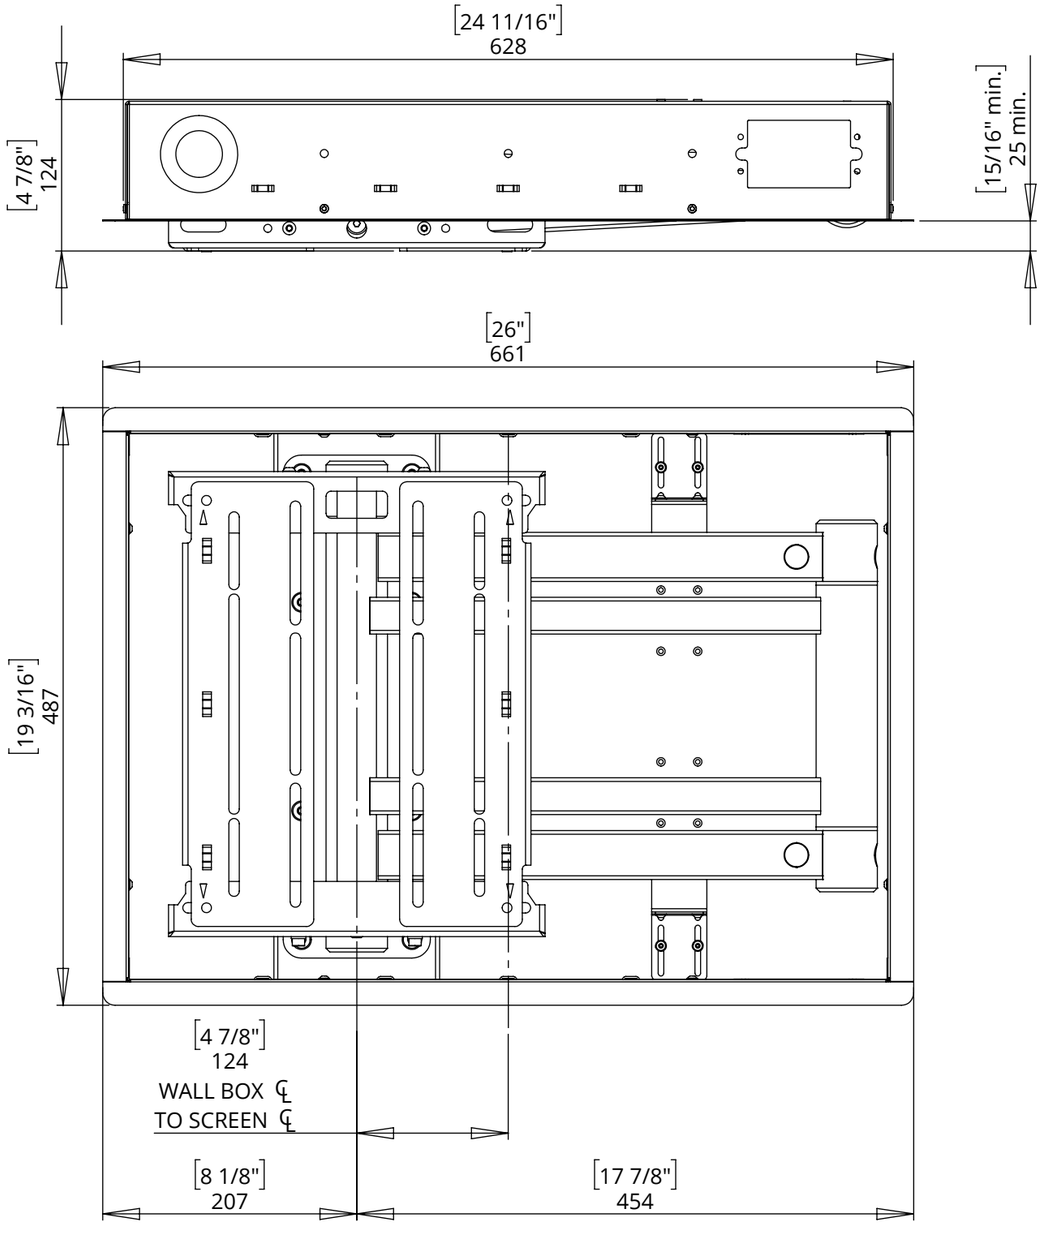

MAXIMUM OUT POSITION

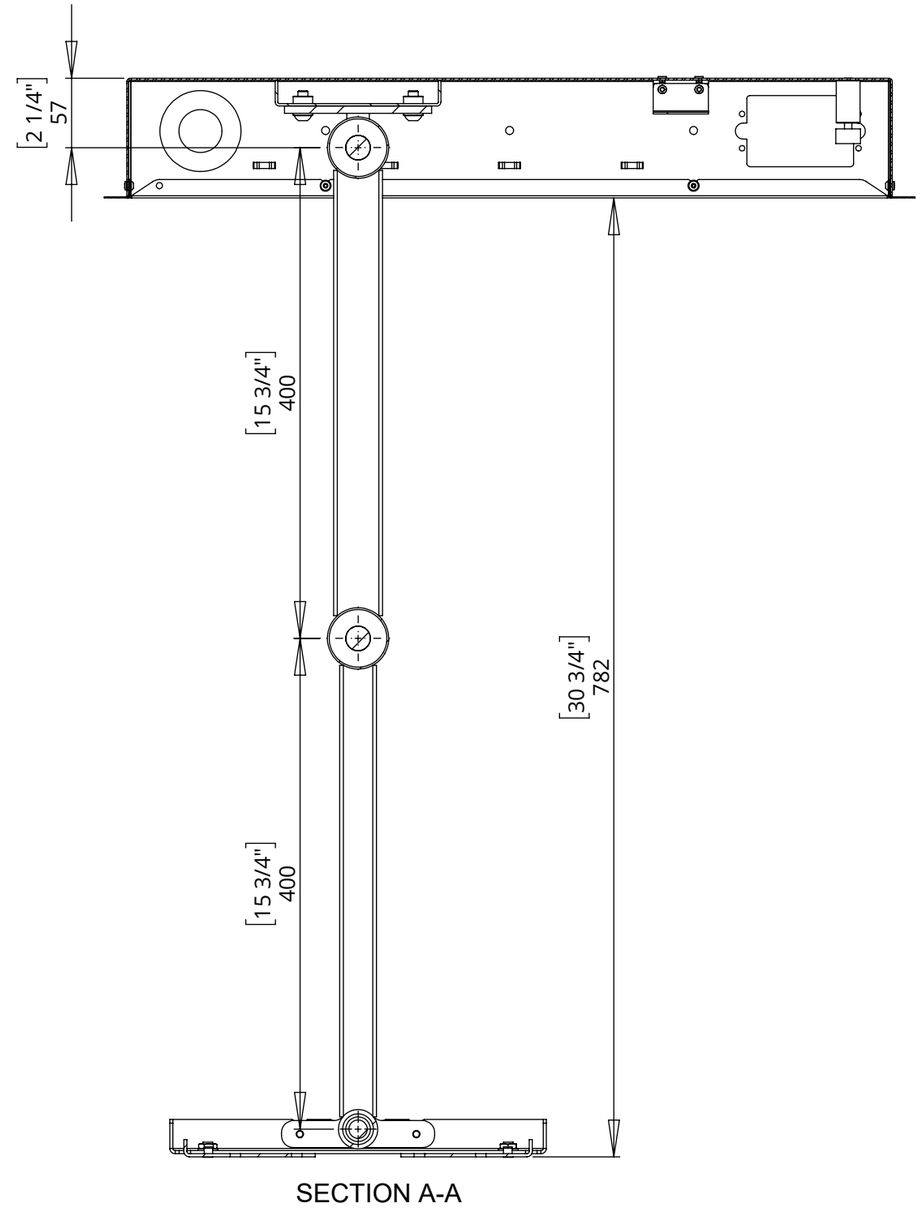



SECTION A-A


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


WB-DA1
WALL BOX FOR DA1

WALL BOX MOUNTING DIMENSIONS

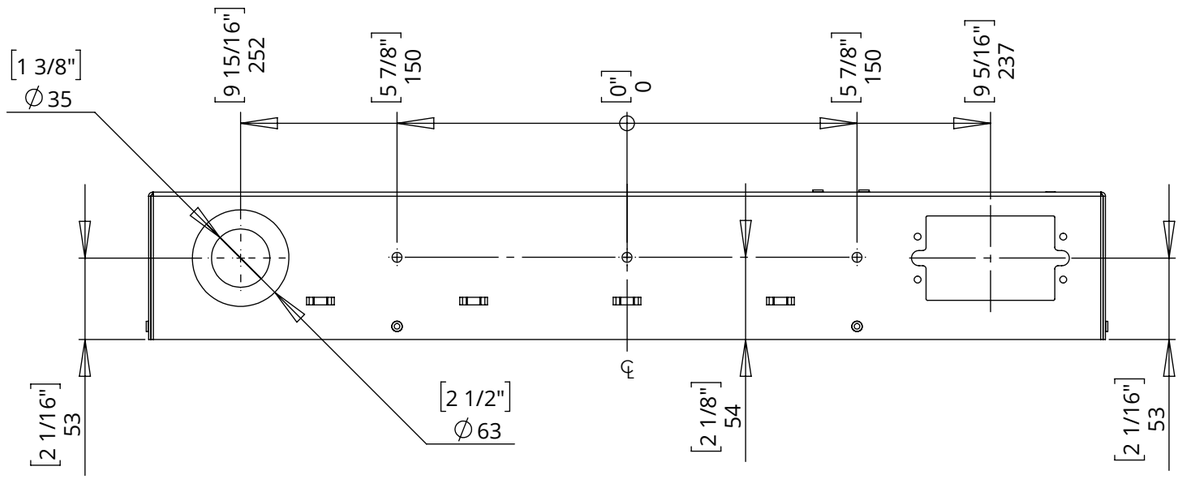

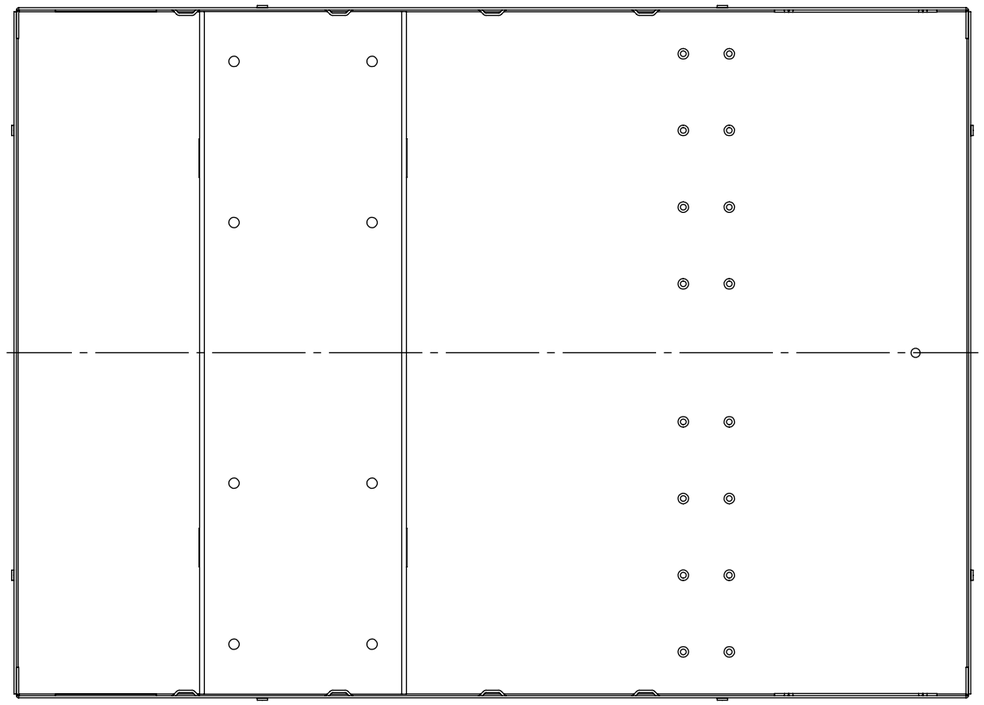

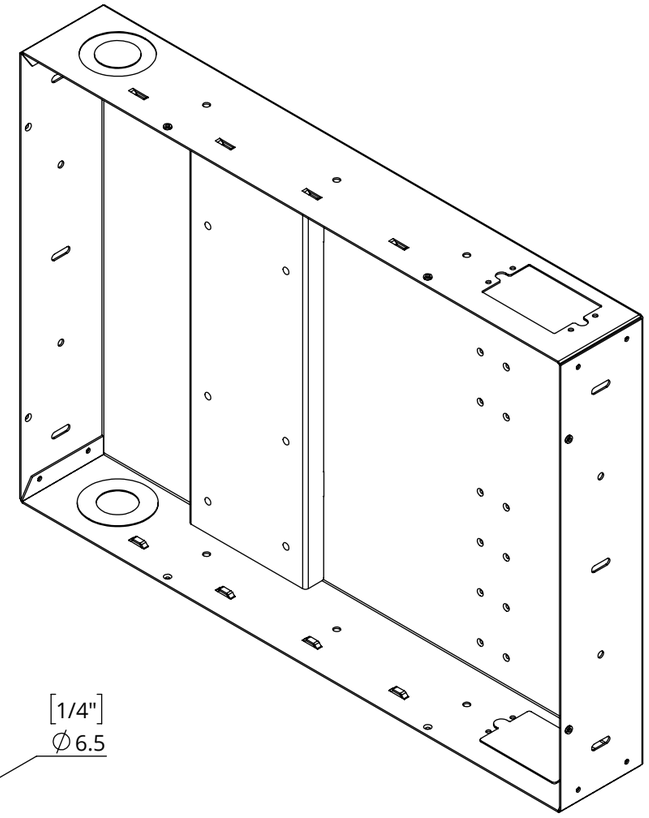

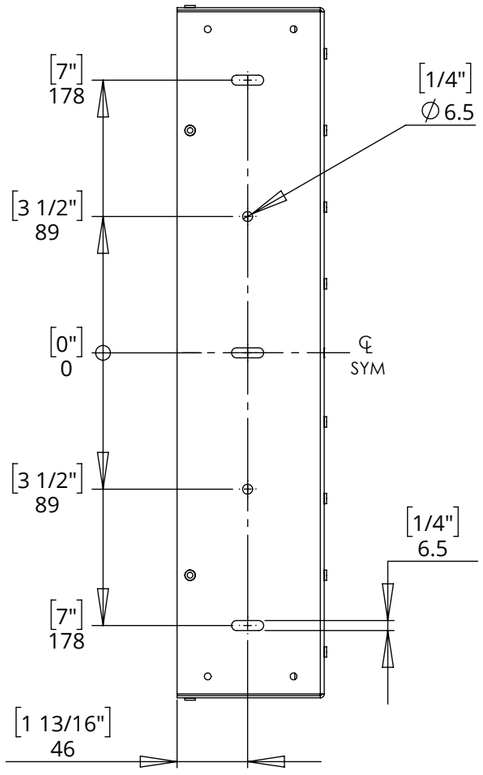


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 6

WB-DA1
WALL BOX FOR DA1

WALL FRAMING DIMENSIONS

Horizontal studs should be used, with the Wall Box
fixed through the three top and three bottom fixing holes.

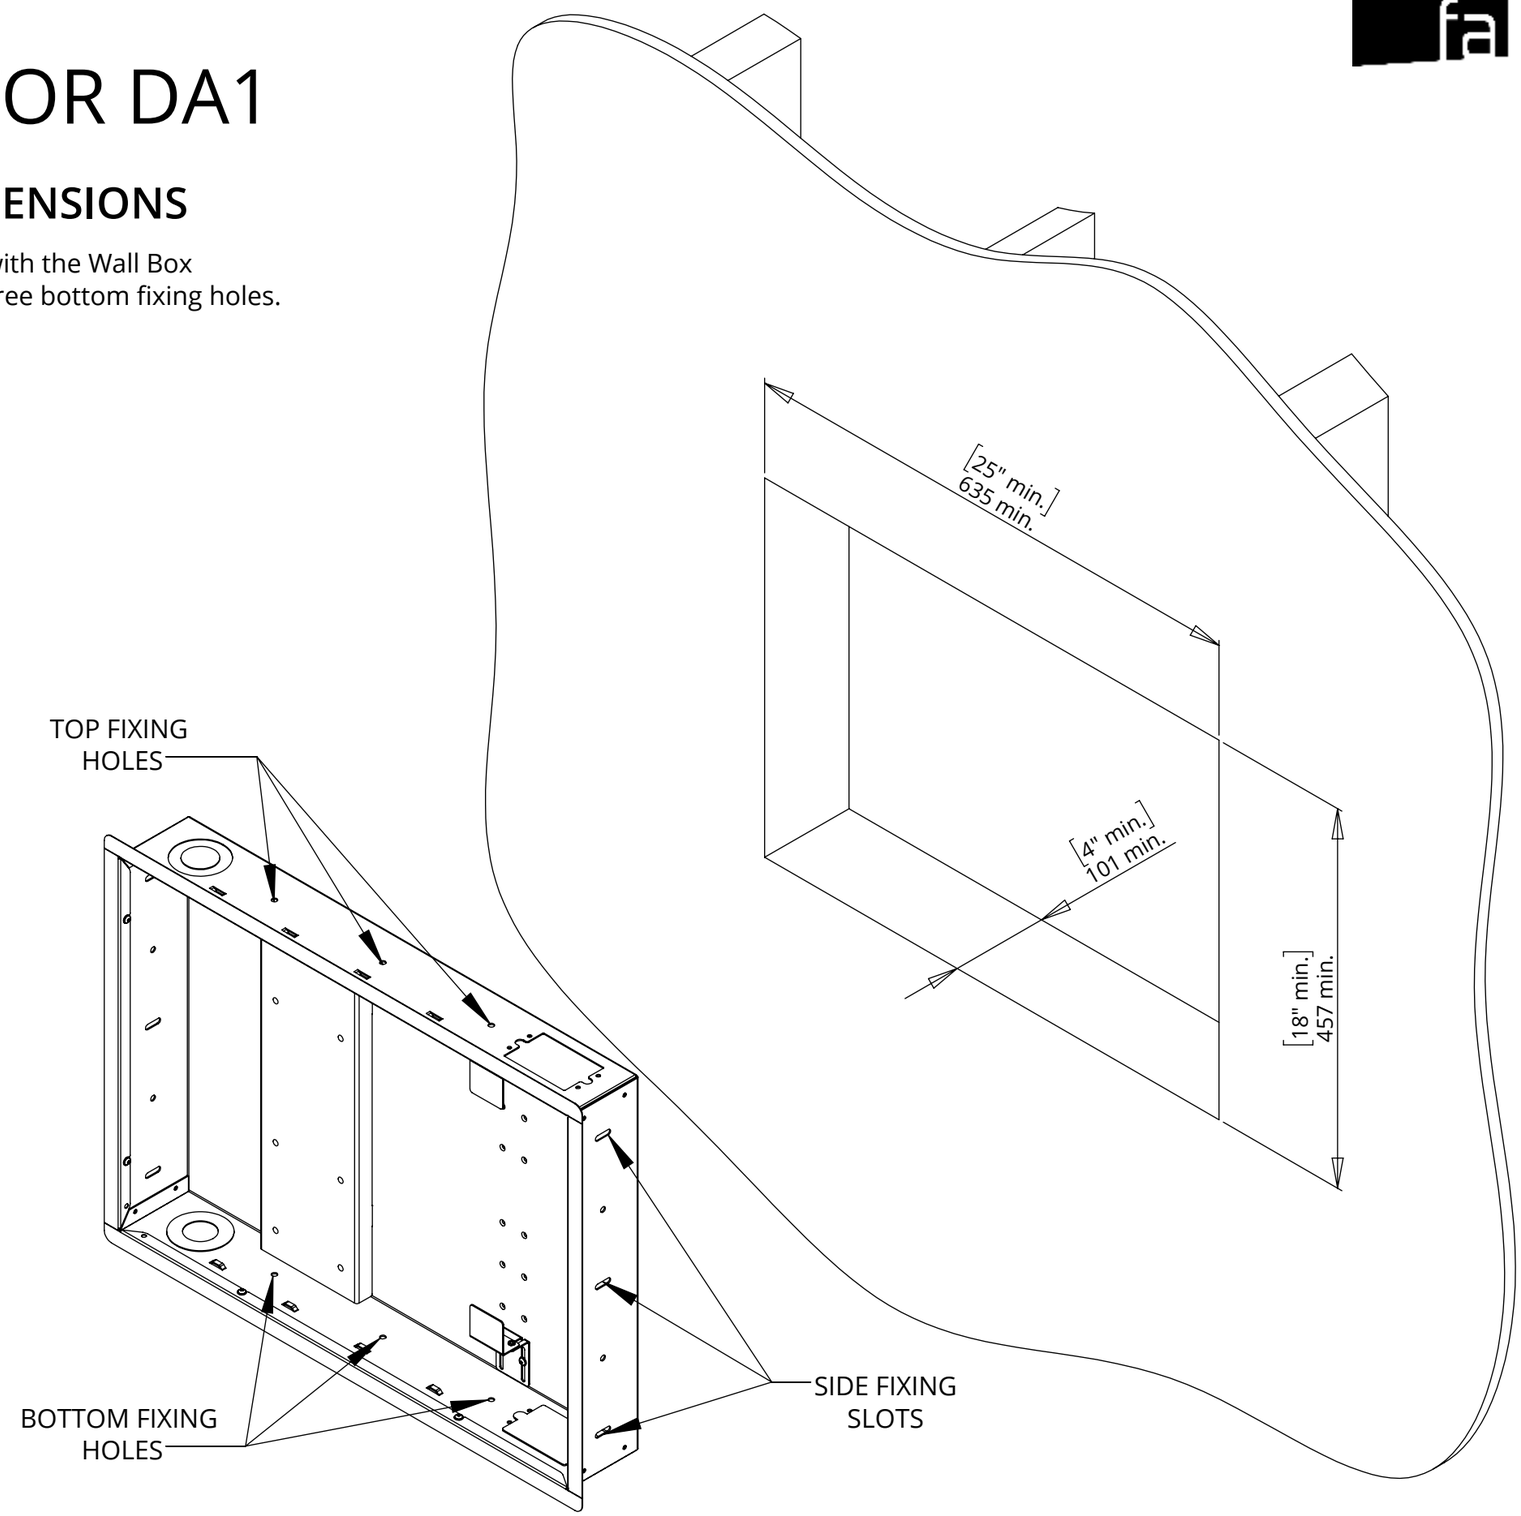

INSERT THE WALL BOX INTO THE VOID AS SHOWN
THEN SECURE THROUGH FIXING HOLES

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 003
SHEET 7