
369596g 1 09.07.23

GRX-PCBL346S Cable

Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye QS
– Energi Savr Node
– Quantum
– Athena
– myRoom
– HomeWorks

- Plenum rated for use in ceilings and enclosures that are also used by the building air distribution system to transport environmental air.

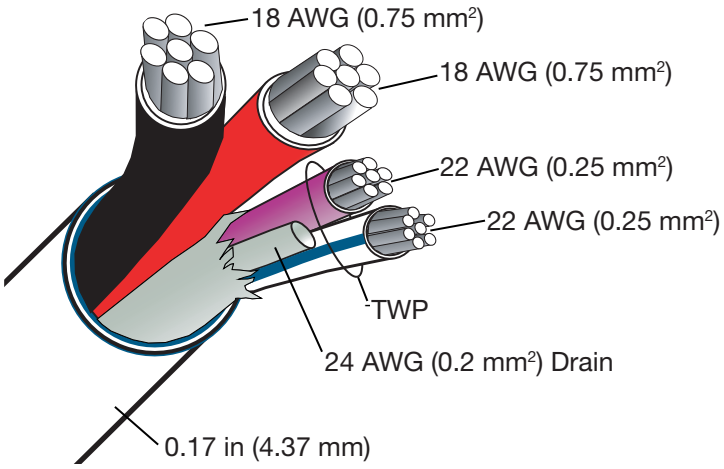

Specifications

- Model number:
  GRX-PCBL346S-500 – 500 ft (150 m) spool
  GRXPCBL346S-250 – 250 ft (75 m) spool
- Listed as type CL3P (Class 3 Plenum Cable) or CMP cULus.
- Five stranded conductors:
  Common – 18 AWG (0.75 mm²)
  Power – 18 AWG (0.75 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²)
  Drain Wire – 24 AWG (0.2 mm²)*
- Total Outer Jacket Diameter: 0.17 in (4.37 mm).
- 300 V Rated.
- Plenum sheath, 75 °C rated.
- UL Listed.
- Rated FT6.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 48 pF/ft max
  – Conductor to conductor: 25 pF/ft max

Note: Control link wiring distance maximums and other limitations for GRX-PCBL346S cable are the same as those for GRX-CBL-346S cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

* Drain wire is not stranded.

LUTRON SPECIFICATION SUBMITTAL Page 1

Job Name:	Model Numbers:	
Job Number:		