
QSH-CBLP-L-500 Cable

Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye QS
– Energi Savr Node
– Quantum
– Athena
– myRoom
– HomeWorks

- Plenum rated for use in ceilings and enclosures that are also used by the building air distribution system to transport environmental air.

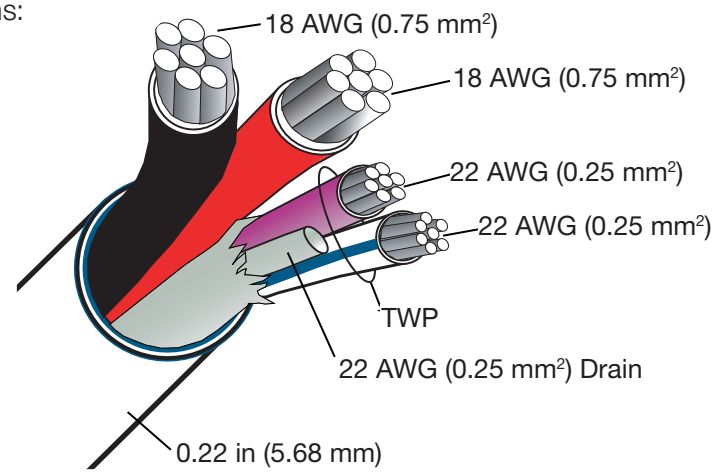

Specifications

- Model numbers:
  QSH-CBLP-L-500 – 500 ft (150 m) spool
- Listed as type CL3P (Class 3 Plenum Cable) or CMP cULus.
- Six stranded conductors:
  Common – 12 AWG (4.0 mm²)
  Power – 12 AWG (4.0 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²) }
  Drain Wire – 22 AWG (0.25 mm²)*
- Total Outer Jacket Diameter: 0.22 in (5.68 mm).
- 300 V Rated.
- Plenum sheath, 75 °C rated.
- UL Listed.
- Rated FT6.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 33.3 pF/ft max
  – Conductor to conductor: 21.5 pF/ft max

Note: Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for control link wiring distance maximums and other limitations.

* Drain wire is not stranded.

Lutron, the Lutron logo, Athena, Energi Savr Node, GRAFIK Eye, GRAFIK 5000, GRAFIK 6000, GRAFIK 7000, HomeWorks, HomeWorks Interactive, LCP128, myRoom, Quantum, and Softswitch128 are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

All other product names, logos, and brands are property of their respective owners.

Job Name:	Model Numbers:	
Job Number:		