
QSH-CBLP-M-500 Cable

Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye QS
– Energi Savr Node
– Quantum
– Athena
– myRoom
– HomeWorks

- Plenum rated for use in ceilings and enclosures that are also used by the building air distribution system to transport environmental air.

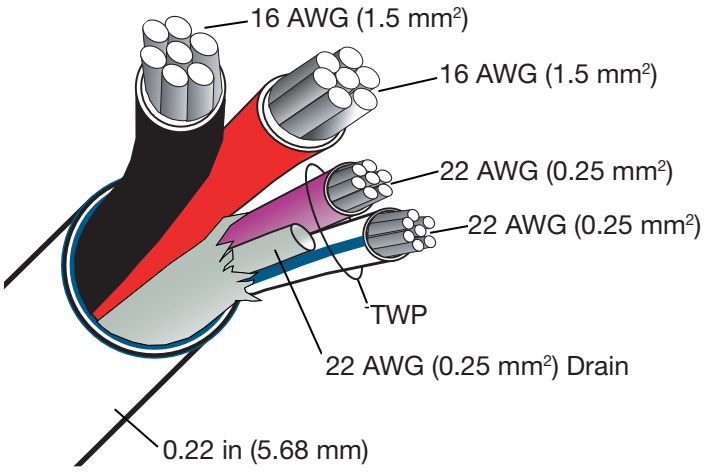

Specifications

- Model number:
  QSH-CBLP-M-500 – 500 ft (150 m) spool
- Listed as type CL3P (Class 3 Plenum Cable) or CMP cULus.
- Five stranded conductors:
  Common – 16 AWG (1.5 mm²)
  Power – 16 AWG (1.5 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²) }
  Drain Wire – 22 AWG (0.25 mm²)*
- Total Outer Jacket Diameter: 0.22 in (5.68 mm).
- 300 V Rated.
- Plenum sheath, 75 °C rated.
- UL Listed.
- Rated FT6.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 33.3 pF/ft max
  – Conductor to conductor: 21.5 pF/ft max

Note: Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for control link wiring distance maximums and other limitations.

* Drain wire is not stranded.

Job Name:	Model Numbers:	
Job Number:		