
369597h 1 09.07.2023

GRX-CBL-346S Cable

Non-Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye 3000
– GRAFIK Eye 4000
– GRAFIK Eye QS
– LCP128
– Softswitch128
– Quantum
– Athena
– myRoom
– HomeWorks
– Energi Savr Node
– Sivoia QS, Sivoia QS Wireless, and Contract Roller QS

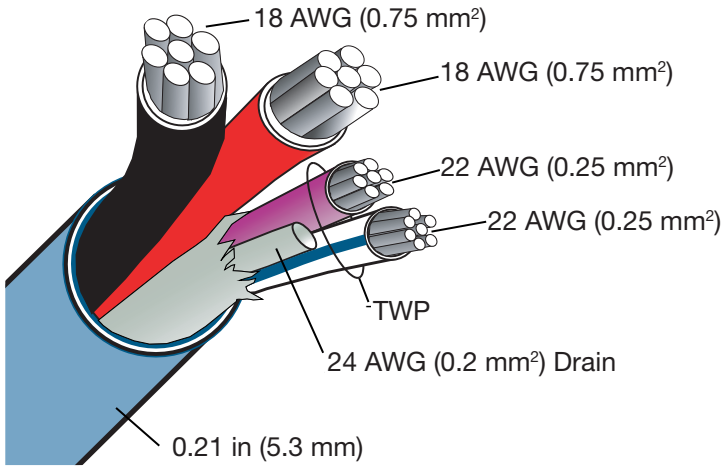

Specifications

- Model number:
  GRX-CBL-346S-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMR cULus.
- Five stranded conductors:
  Common – 18 AWG (0.75 mm²)
  Power – 18 AWG (0.75 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²) }
  Drain Wire – 24 AWG (0.2 mm²)*
- Total outer jacket diameter: 0.21 in (5.3 mm).
- 300 V rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 48 pF/ft max
  – Conductor to conductor: 25 pF/ft max

Note: Control link wiring distance maximums and other limitations for GRX-CBL-346S cable are the same as those for GRX-PCBL346S (plenum rated) cable and QS-CBL-LSZH (low-smoke zero-halogen rated) cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

* Drain wire is not stranded.

LUTRON SPECIFICATION SUBMITTAL Page 1

Job Name:	Model Numbers:	
Job Number:		