
GRX-CBL-46L Cable

Non-Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye 3000
– GRAFIK Eye 4000
– GRAFIK Eye QS
– LCP128
– Softswitch128
– Quantum
– Athena
– HomeWorks
– Energi Savr Node
– Sivoia QS, Sivoia QS Wireless, and Contract Roller QS

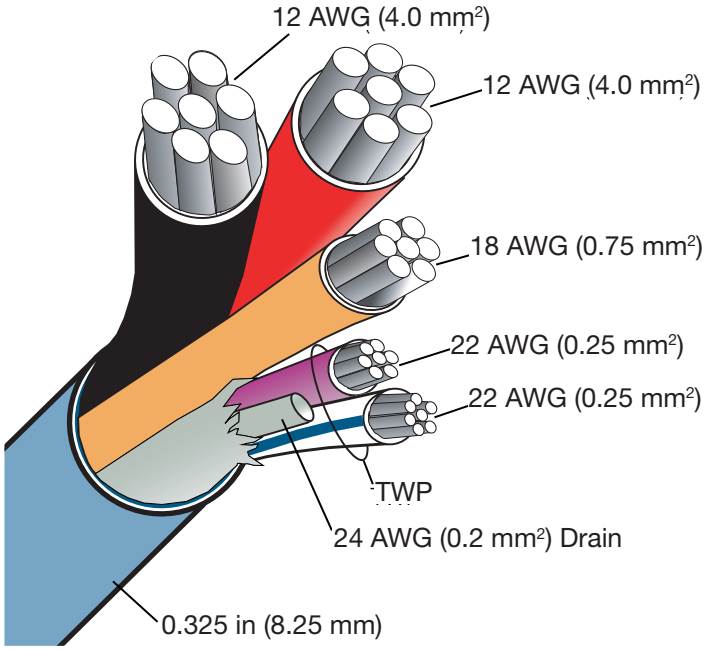

Specifications

- Model numbers:
  GRX-CBL-46L-250 – 250 ft (75 m) spool
  GRX-CBL-46L-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMG cULus.
- Six stranded conductors:
  Common – 12 AWG (4.0 mm²)
  Power – 12 AWG (4.0 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²) }
  Sense Line – 18 AWG (0.75 mm²)
  Drain Wire – 24 AWG (0.2 mm²)*
- Total outer jacket diameter: 0.325 in (8.25 mm).
- 300 V rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 48 pF/ft max
  – Conductor to conductor: 25 pF/ft max

Note: Control link wiring distance maximums and other limitations for GRX-CBL-46L cable are the same as those for GRX-PCBL-46L (plenum rated) cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

* Drain wire is not stranded.

Job Name:	Model Numbers:	
Job Number:		