
QSH-CBL-L-500 Cable

Non-Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye 3000
– GRAFIK Eye 4000
– GRAFIK Eye QS
– LCP128
– Softswitch128
– Quantum
– Athena
– myRoom
– HomeWorks
– Energi Savr Node
– Sivoia QS, Sivoia QS Wireless, and Contract Roller QS

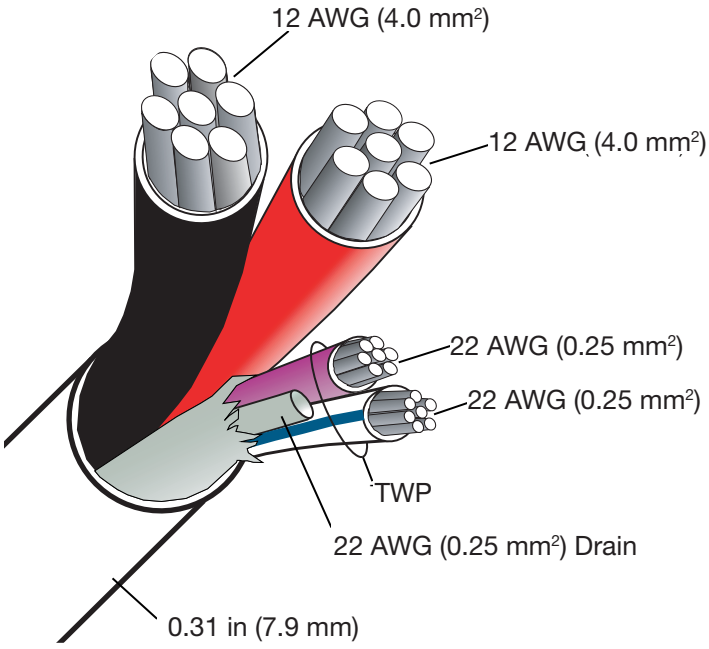

Specifications

- Model number:
  QSH-CBL-L-500 – 500 ft (150 m) spool
- Listed as type CL3R.
- Five stranded conductors:
  Common – 12 AWG (4.0 mm²)
  Power – 12 AWG (4.0 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²) }
  Drain Wire – 22 AWG (0.25 mm²)*
- Total outer jacket diameter: 0.31 in (7.9 mm).
- 300 V rated.
- PVC sheath, 90 °C rated.
- UL Listed.
- Rated FT6.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 37 pF/ft max
  – Conductor to conductor: 21.5 pF/ft max

Note: Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for control link wiring distance maximums and other limitations.

* Drain wire is not stranded.

Job Name:	Model Numbers:	
Job Number:		