
QSH-CBL-M-500 Cable

Non-Plenum rated cable for use with the following Lutron systems:

– GRAFIK Eye 3000
– GRAFIK Eye 4000
– GRAFIK Eye QS
– LCP128
– Softswitch128
– Quantum
– Athena
– myRoom
– HomeWorks
– Energi Savr Node
– Sivoia QS, Sivoia QS Wireless, and Contract Roller QS

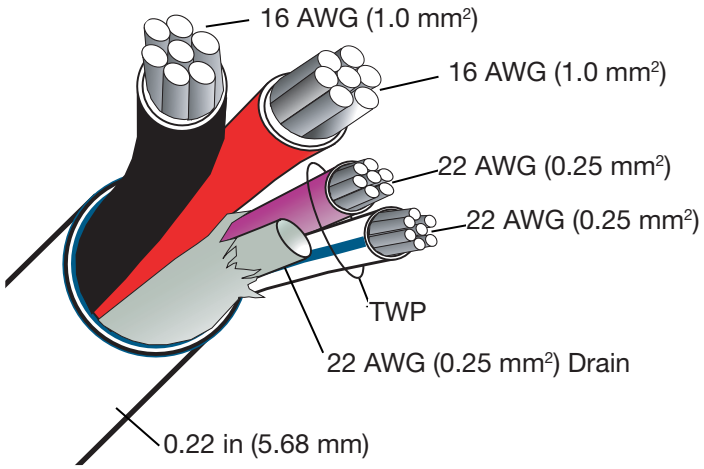

Specifications

- Model number:
  QSH-CBL-M-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMR cULus.
- Five stranded conductors:
  Common – 16 AWG (1.0 mm²)
  Power – 16 AWG (1.0 mm²)
  MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
  $\overline{\text{MUX}}$ Data – 22 AWG (0.25 mm²)
  Drain Wire – 22 AWG (0.25 mm²)*
- Total outer jacket diameter: 0.22 in (5.68 mm).
- 300 V rated.
- PVC sheath, 90 °C rated.
- Rated FT6.
- cULus Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
  – Conductor to shield: 37 pF/ft max
  – Conductor to conductor: 23.9 pF/ft max

Note: Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for control link wiring distance maximums and other limitations.

* Drain wire is not stranded.

Lutron, the Lutron logo, Athena, Energi Savr Node, GRAFIK Eye, GRAFIK 5000, GRAFIK 6000, GRAFIK 7000, HomeWorks, HomeWorks Interactive, LCP128, myRoom, Quantum, and Softswitch128 are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

All other product names, logos, and brands are property of their respective owners.

Job Name:	Model Numbers:	
Job Number:		