
EAD
ELECTRIC ADVANCE & DROP BRACKET

future automation

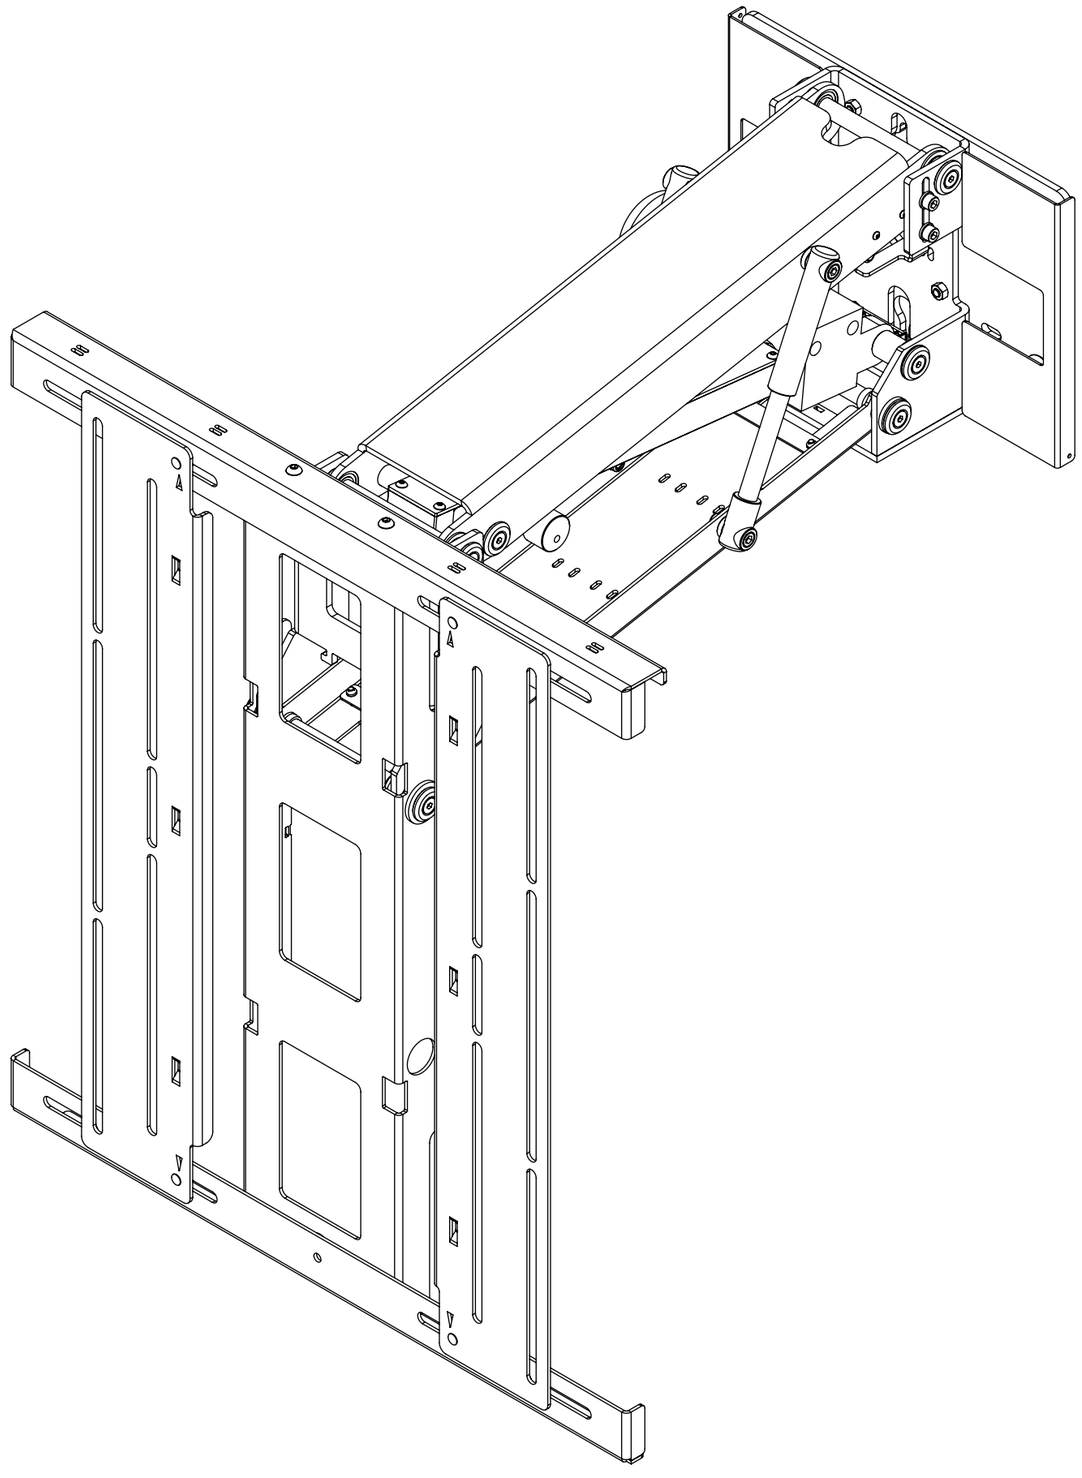

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 1

EAD
ELECTRIC ADVANCE & DROP BRACKET

future automation

SPECIFICATION	MEASUREMENTS
Screen Sizes (Approx)	50"-80"
Maximum Weight Capacity	50Kg (110lb)
Depth From Wall	138mm (5 7/16")
Maximum Extension From Wall	550mm (21 5/8")
Maximum Drop from In Position	533mm (21")
Packaging Dimensions	840 x 750 x 270mm (33 1/16" x 29 1/2" x 10 5/8")
Shipping Weight	25Kg (55lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 600, 500, 400, 300, 200 W x 500, 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control, Control box
Marine Suitable	No

EAD
ELECTRIC ADVANCE & DROP BRACKET


future automation


CABLE ROUTING


The EAD's mounting allows for cables from the screen to be fed through the integrated cable management. This allows the cables to be stowed tidily within the mechanism.


Screen and Mechanism cables should be routed to a control box behind the wall via an opening in the back of the wall or a conduit leading to it.

NOTE: TURN THE MECHANISM OFF FROM THE MAINS WHEN ROUTING CABLES. THE EAD HAS A VERY POWERFUL MOTOR AND NO ANTI JAM FEATURE AVAILABLE!

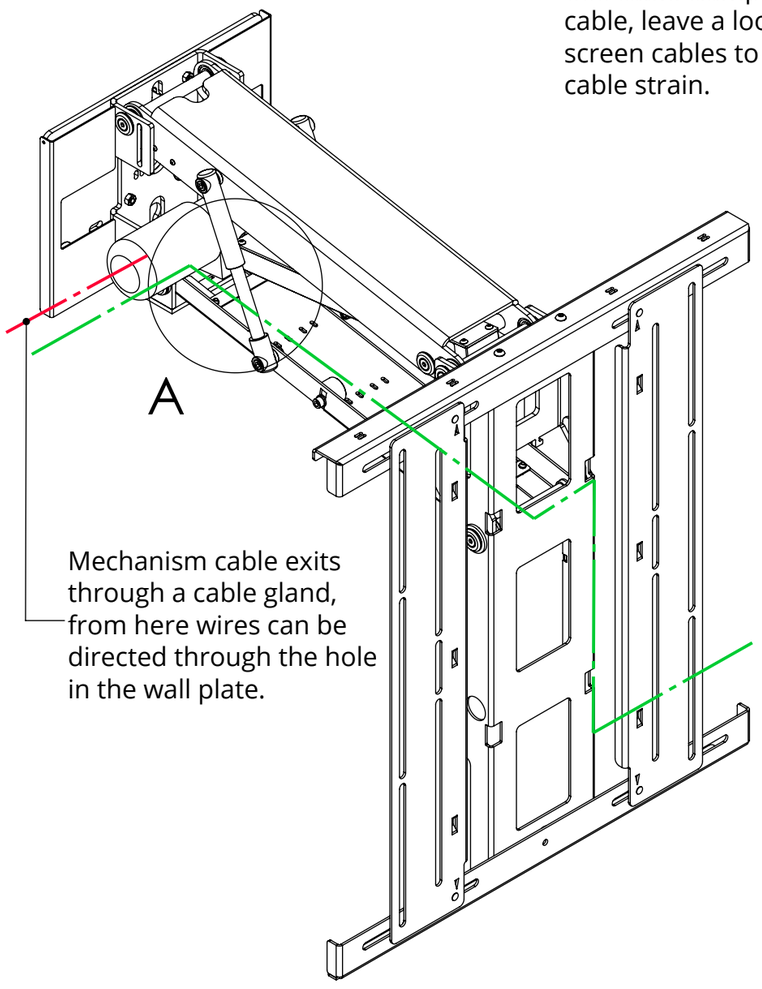

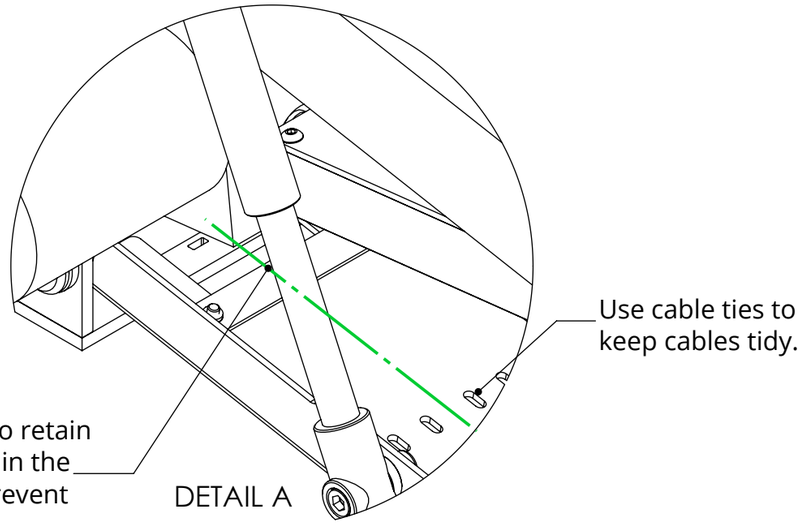

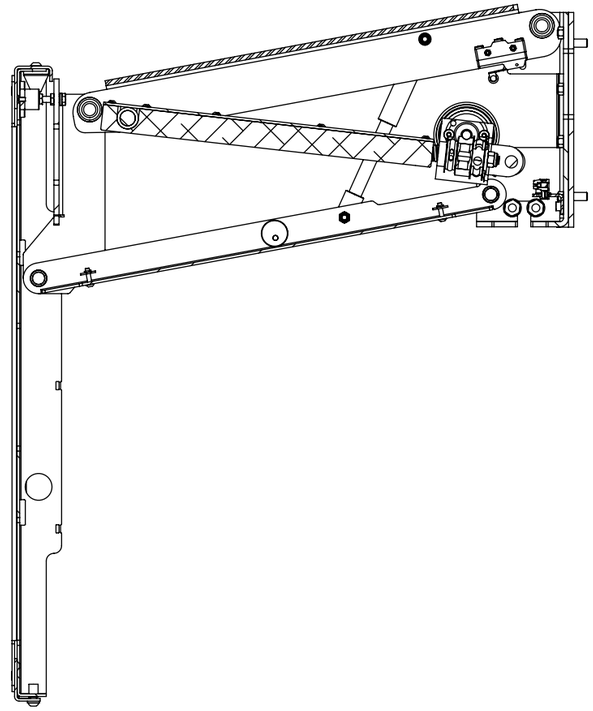

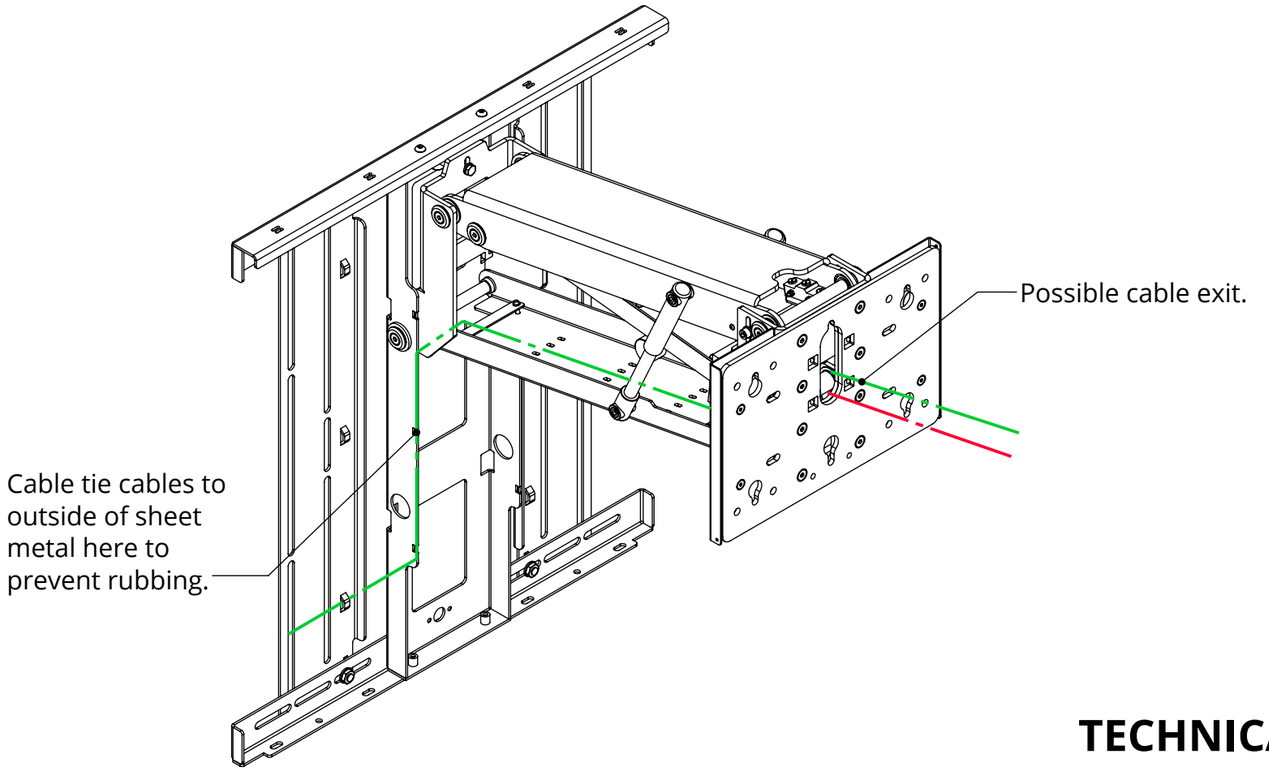

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 3


EAD
ELECTRIC ADVANCE & DROP BRACKET

POSITIONING AND MOVEMENT DETAILS

The EAD can clear a 305mm [12"] mantle piece with ease when mounted 70mm [2 3/4"] above it.

A screen with height of 690mm [27 3/16"] will be required to cover the mechanism


The graph below gives an approximation of wall plate height position assuming the bottom edge of the screen is flush with the wall plate.
Black Line = Wall mounted
Red Line = Recessed in WB-EAD

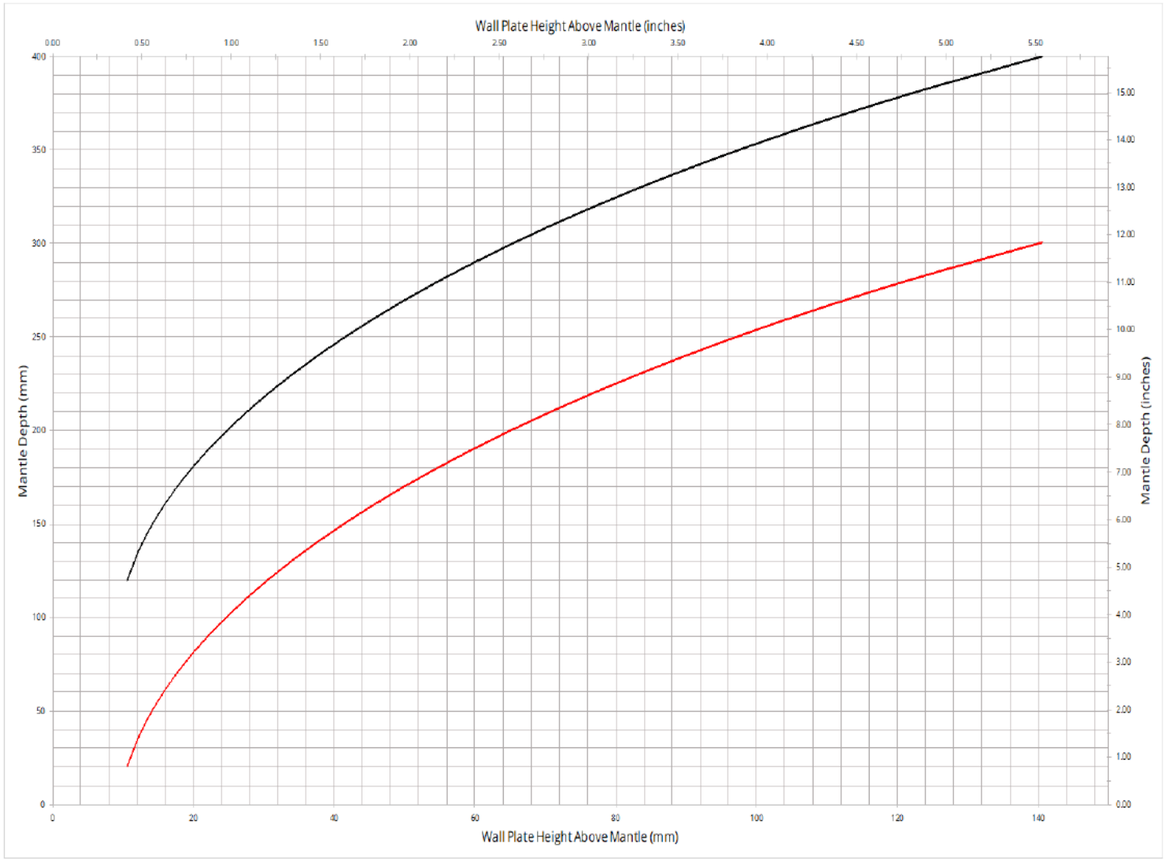

If the EAD is being recessed then the figure for mantle piece depth increases by the recess depth value.

If the lower screen edge is not flush with the EAD wall plate, the wall plate height above mantle increases by the offset amount.

Due to mechanical tolerances between moving components, mechanisms may experience a level deviation of up to +/- 0.15deg between the in and out positions.

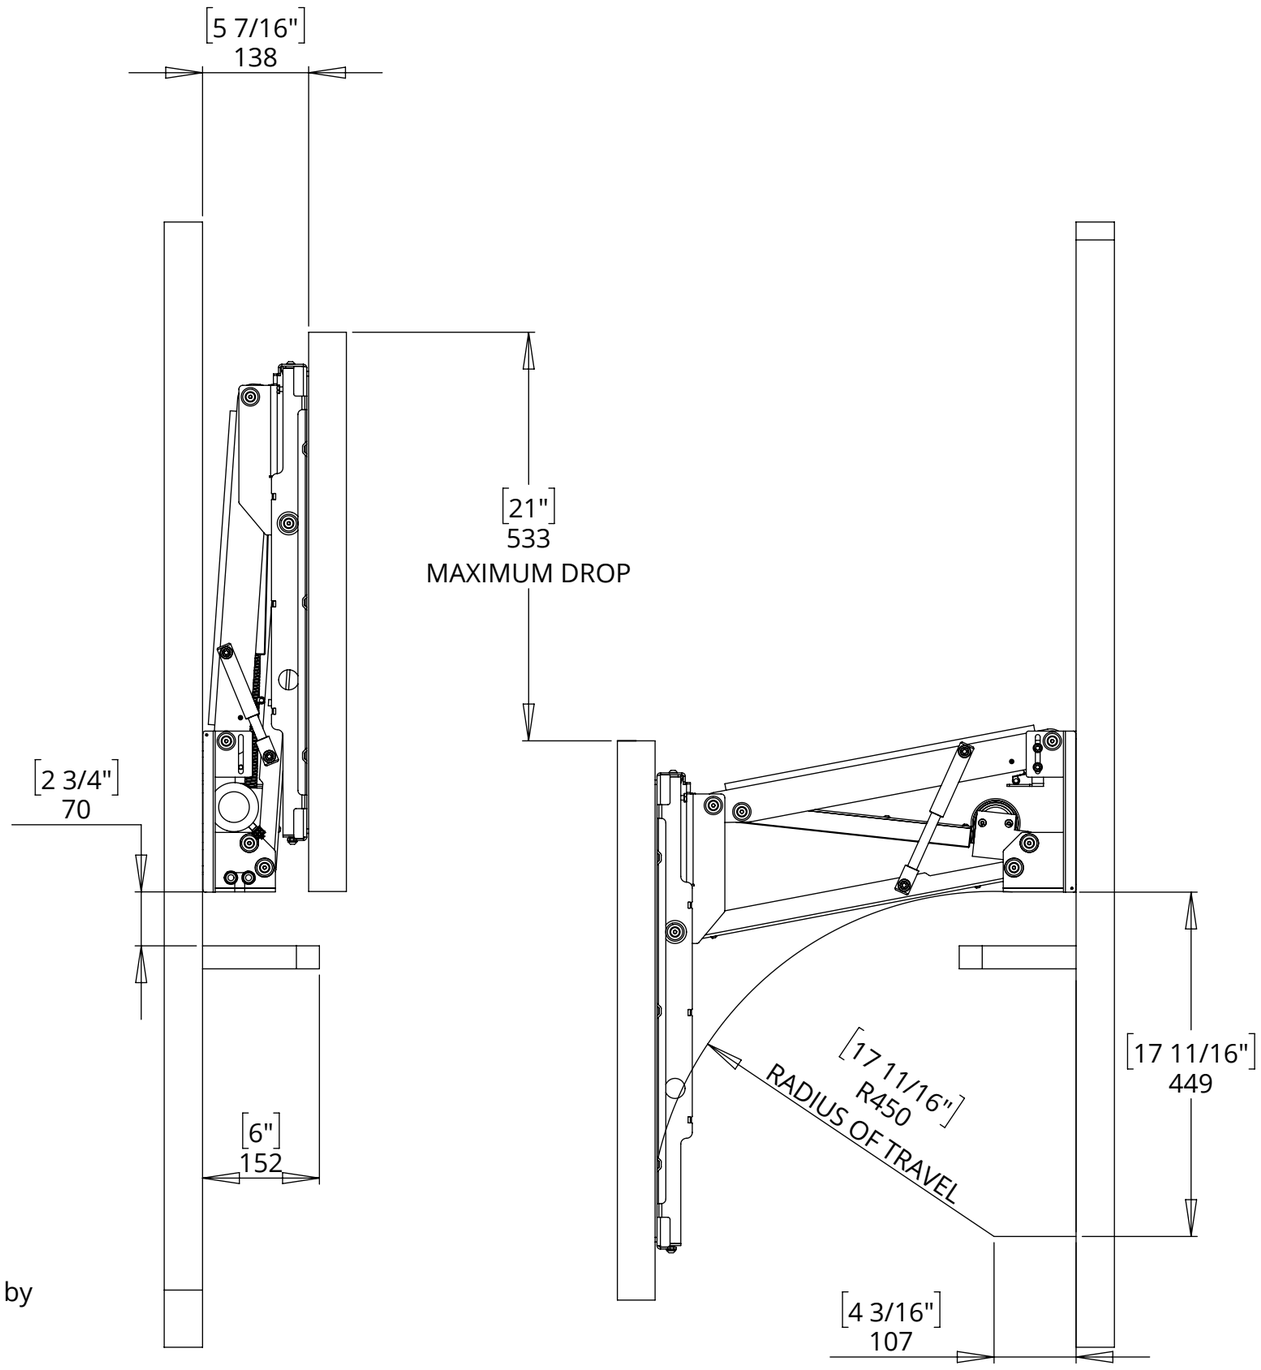

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 015
SHEET 4

EAD
ELECTRIC ADVANCE & DROP BRACKET

SCREEN MOUNTING


Remove screen mount as shown below and assemble to screen.

Reassemble screen mount to mechanism in reverse of disassembly. Route cables as shown.

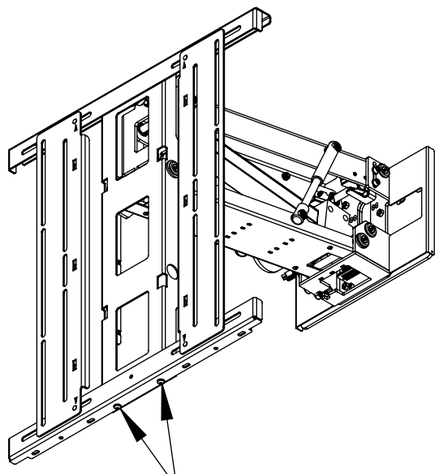


REMOVE M6 BOLTS


TILT AND UNHOOK MOUNT PLATE

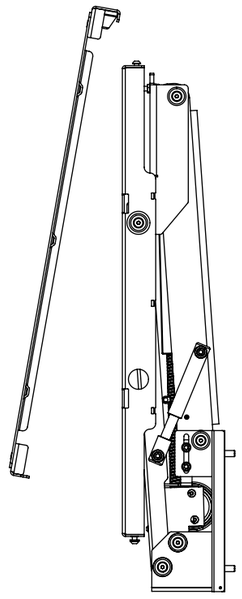

BOLT MOUNT TO SCREEN

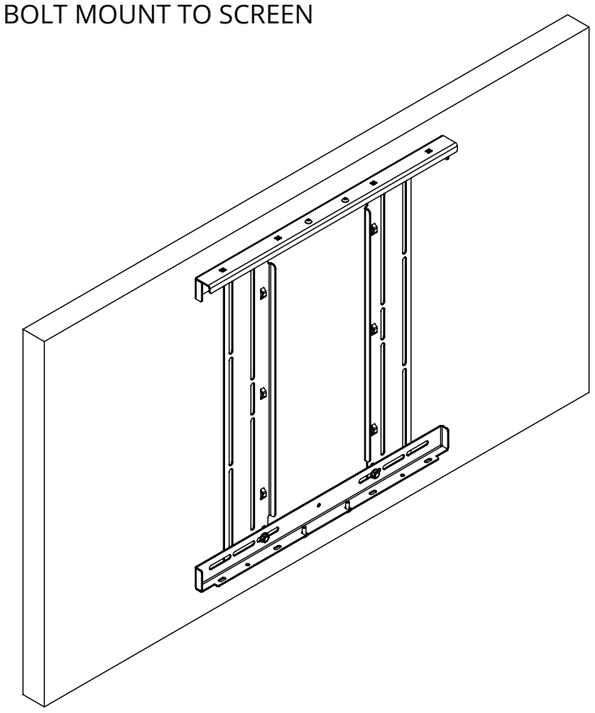

HOOK ON AND RE-INSERT
M6 BOLTS

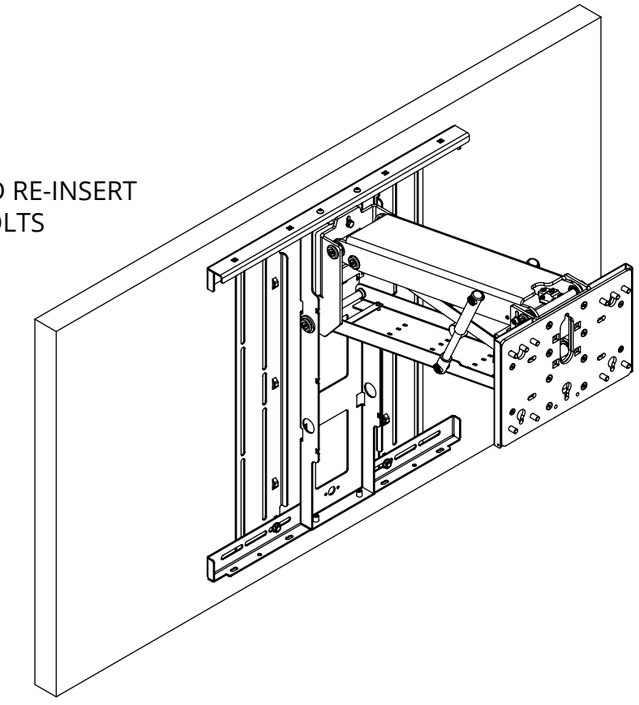

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 015
SHEET 5


EAD
ELECTRIC ADVANCE & DROP BRACKET


POSITION ADJUSTMENT


The EAD can be adjusted to fine tune the up and down positions.

Refer to instructions for more information on switch adjustment.

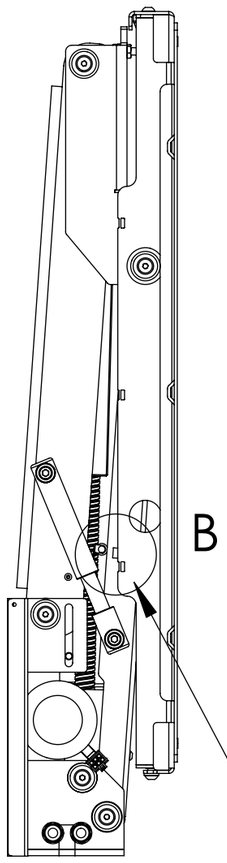

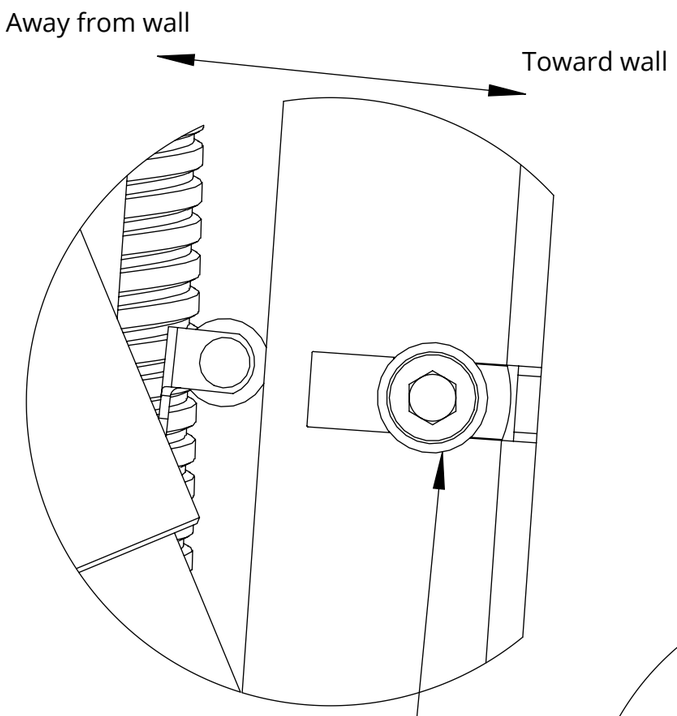

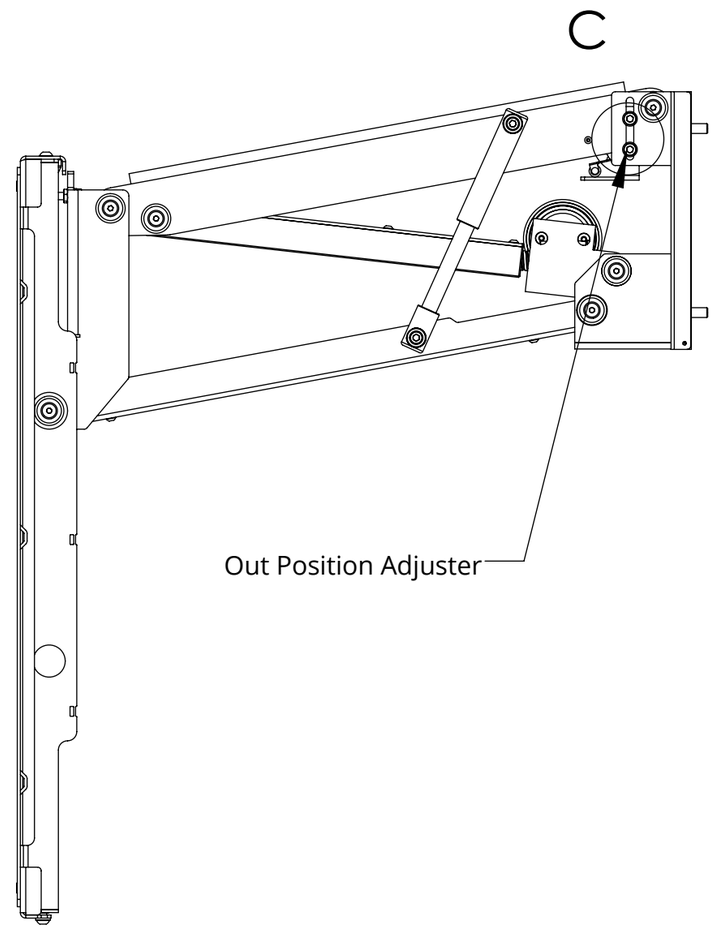

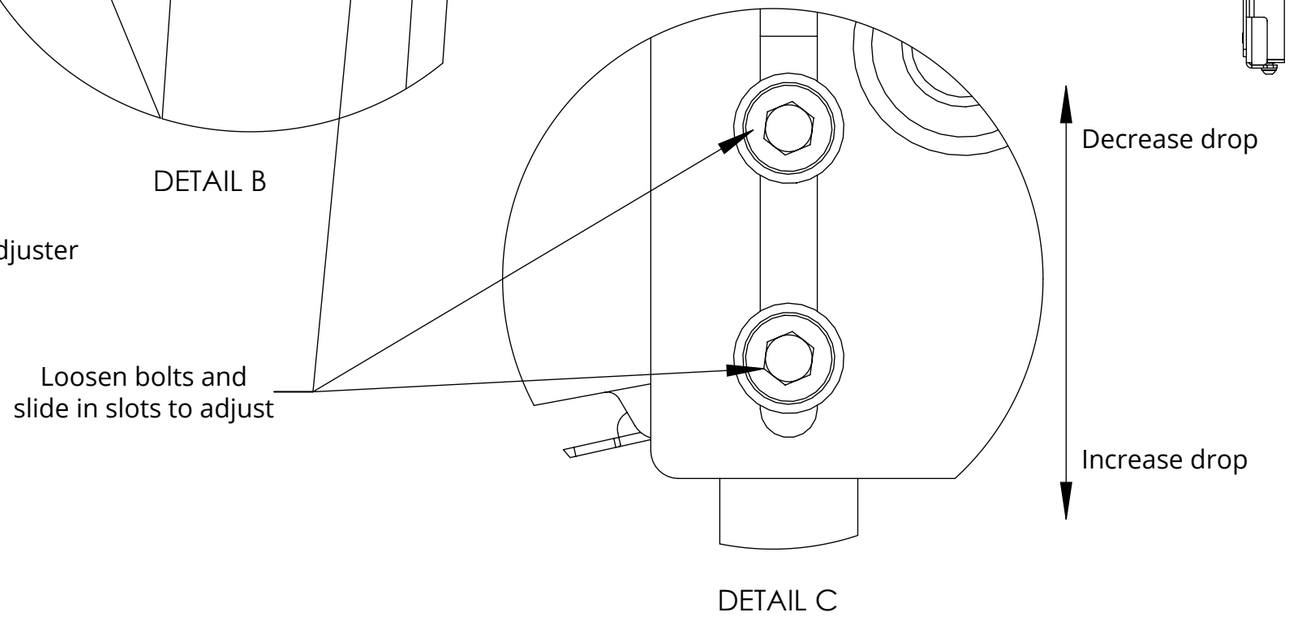



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


EAD
ELECTRIC ADVANCE & DROP BRACKET


future automation

UP POSITION DIMENSIONS

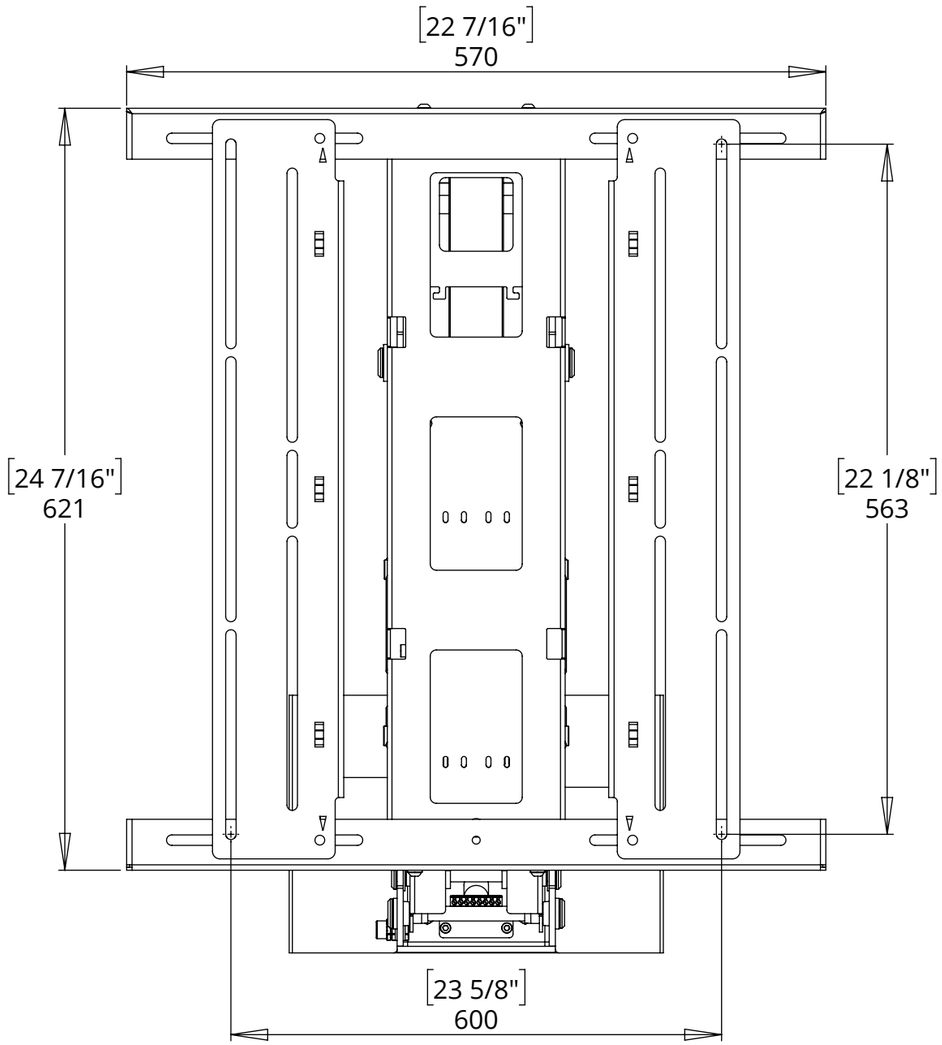

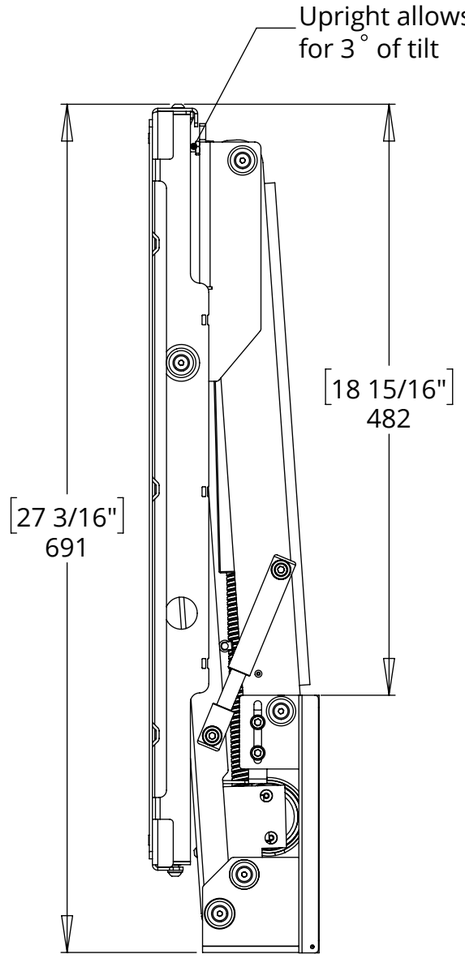

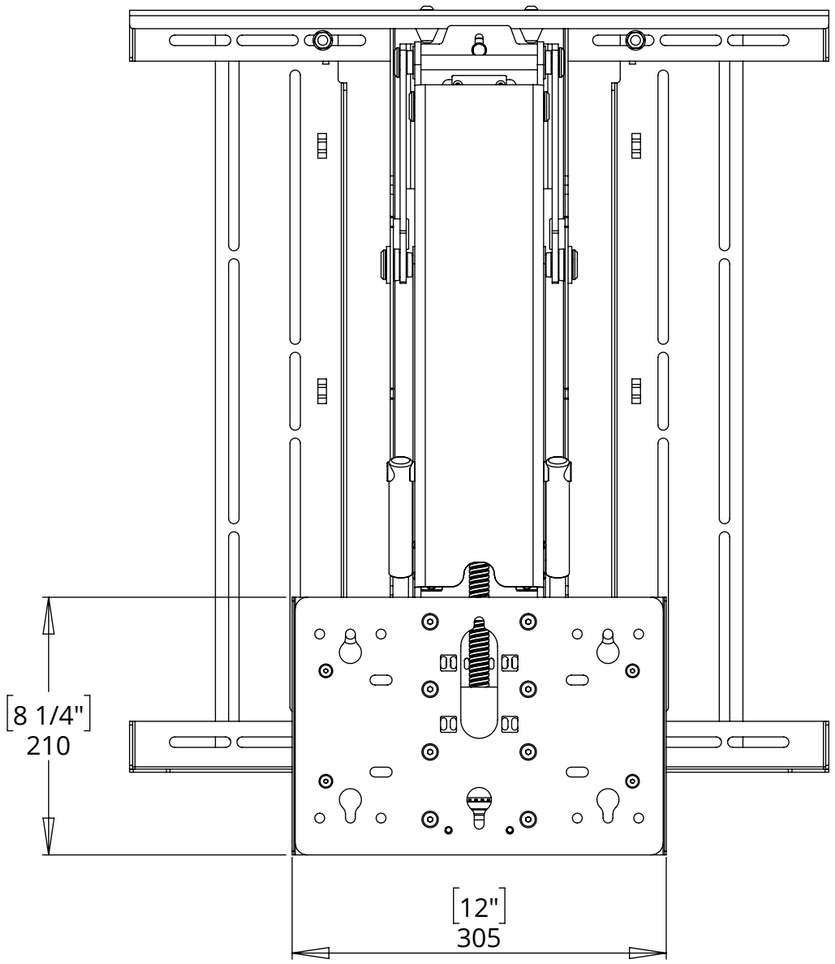

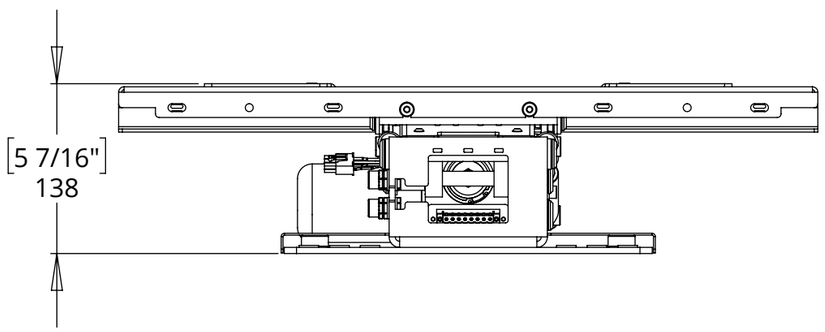



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 7

EAD
ELECTRIC ADVANCE & DROP BRACKET

DOWN POSITION DIMENSIONS

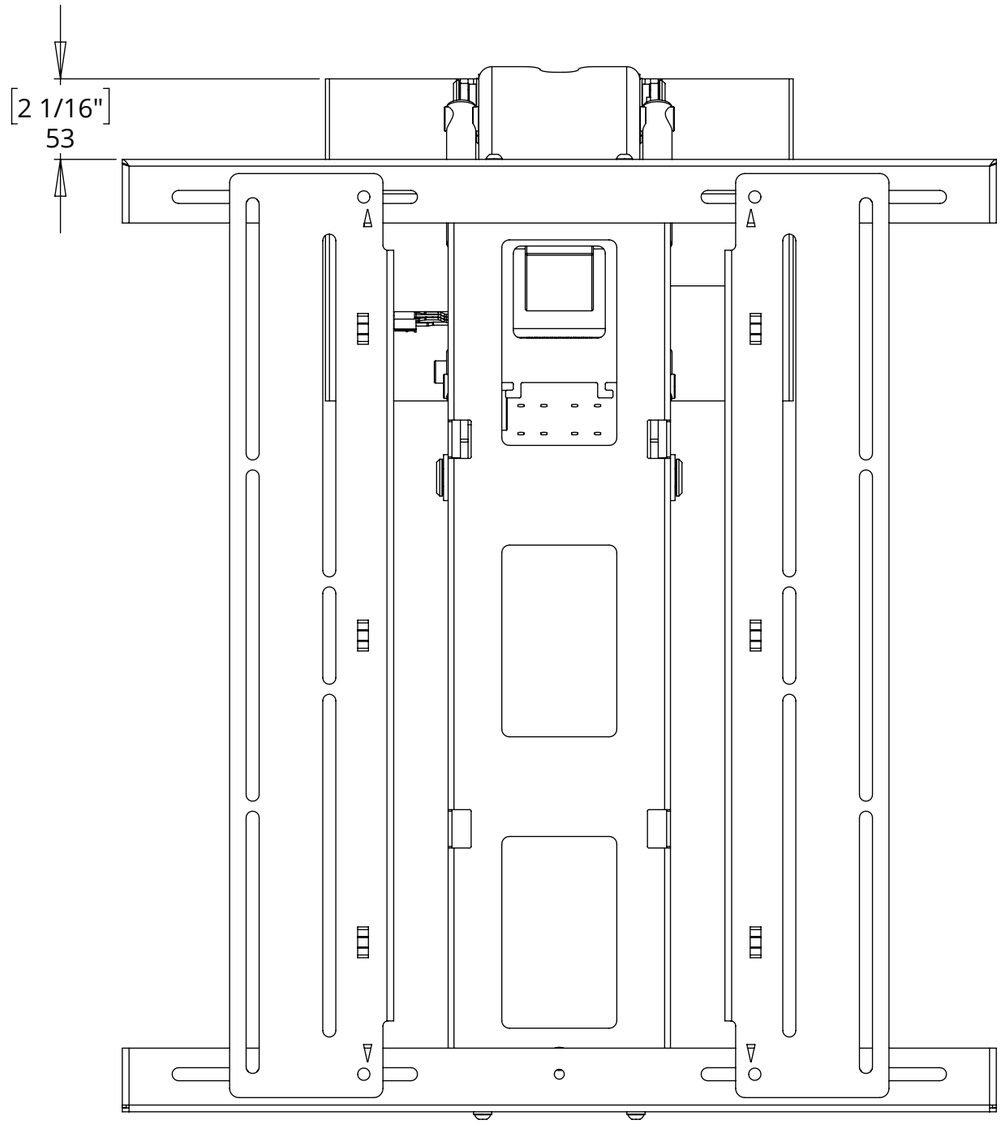


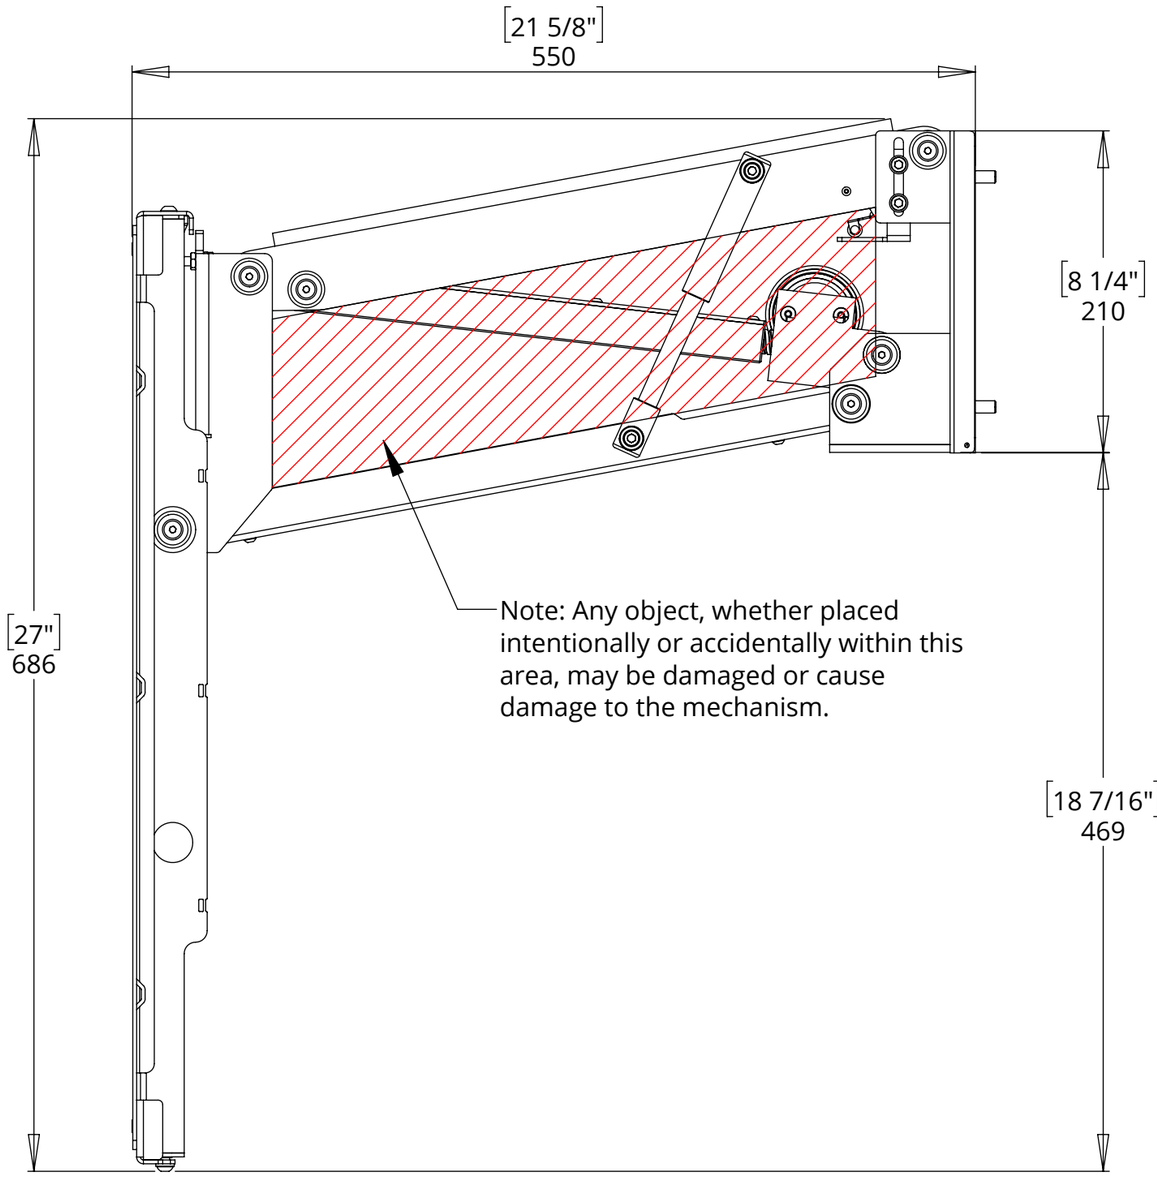


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

EAD
ELECTRIC ADVANCE & DROP BRACKET

WALL PLATE DIMENSIONS

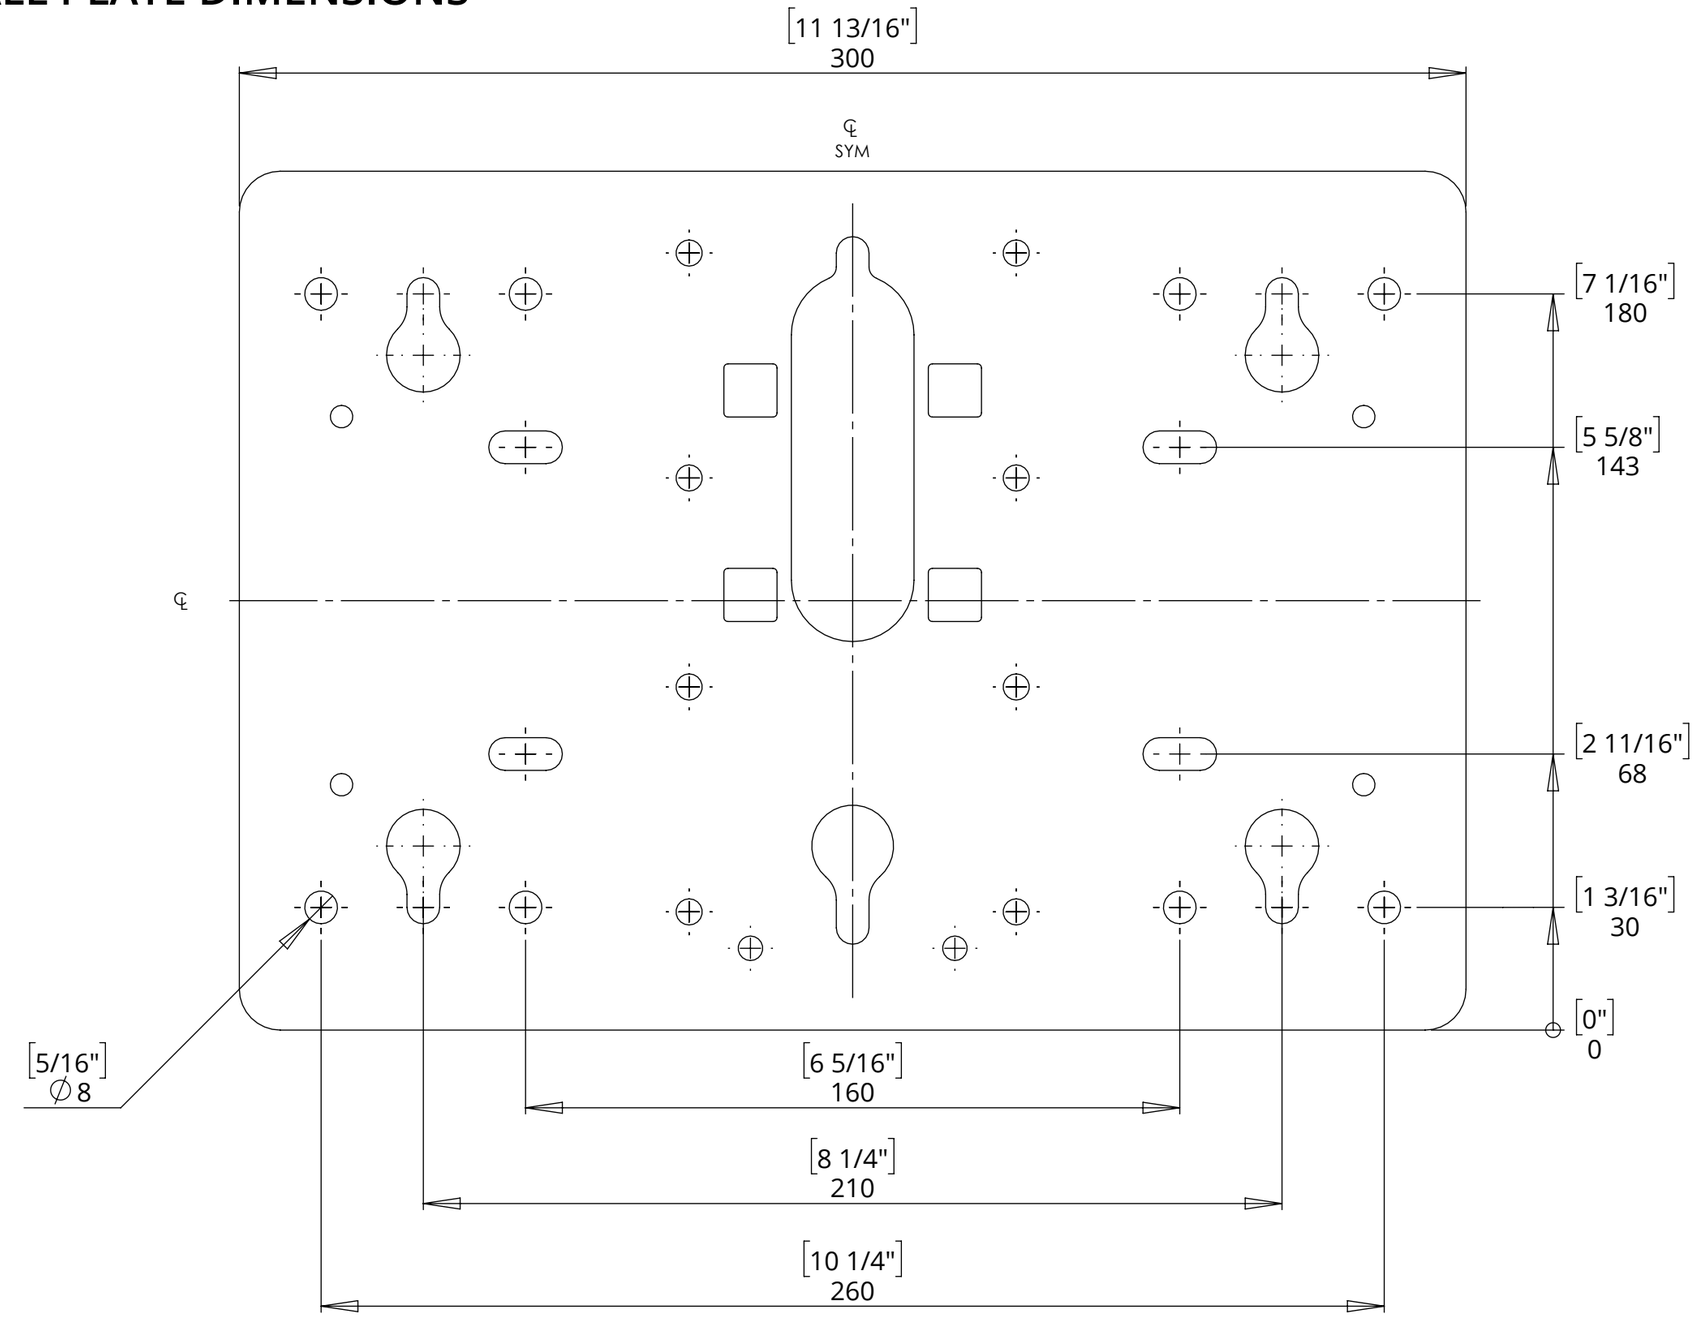

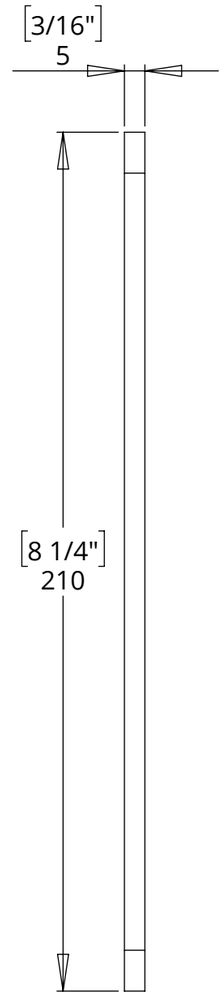

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET