
FME
FLOOR MOUNT ELECTRIC

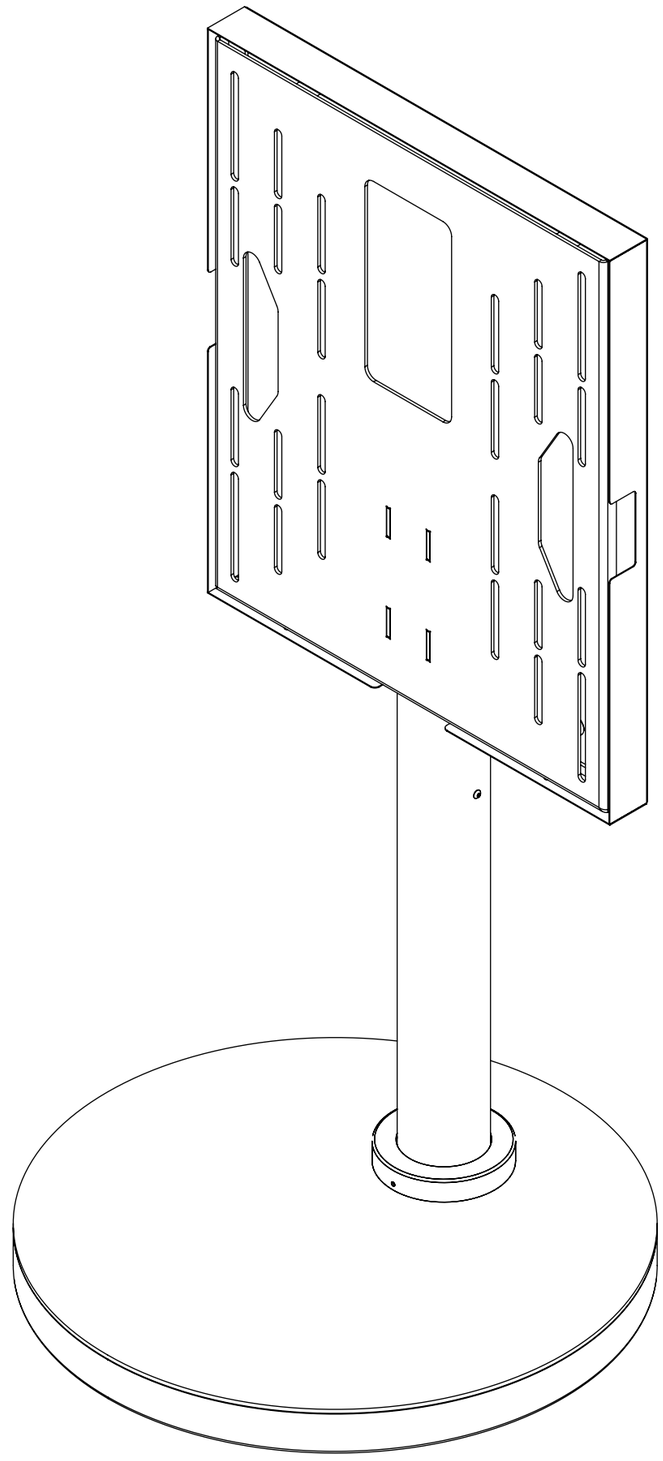

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 002
SHEET 1


FME
FLOOR MOUNT ELECTRIC


SPECIFICATION	MEASUREMENTS
Screen Sizes (Approx)	40" - 70"
Maximum Weight Capacity	40Kg (88lb)
Height to Screen Centre	Standard 800mm (31") Custom Available
Packaging Dimensions	Variable
Shipping Weight	Variable
Maximum Rotation	60° - Bi-directional
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Custom pole length
Package Contents	Mechanism, IR remote control

FME
FLOOR MOUNT ELECTRIC


GENERAL DIMENSIONS

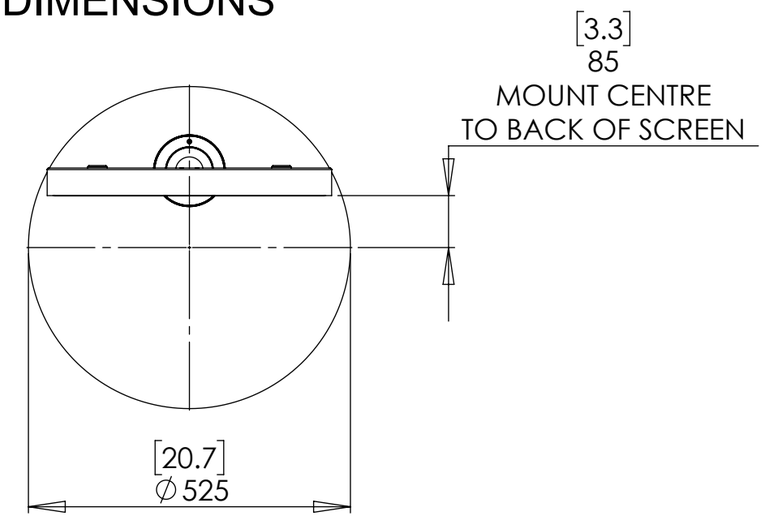

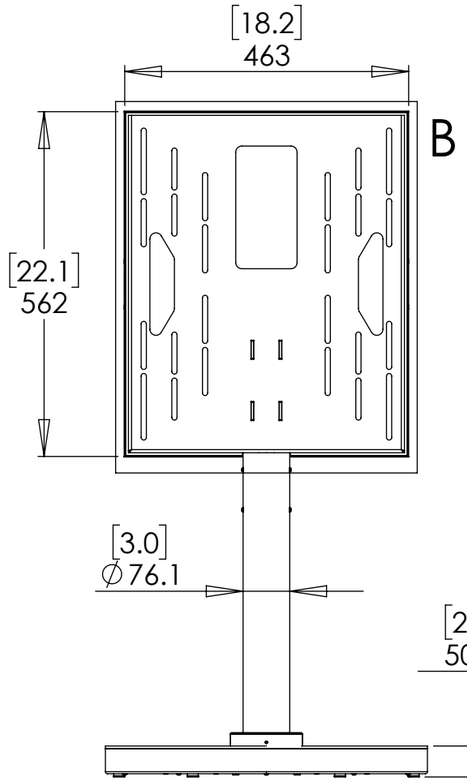

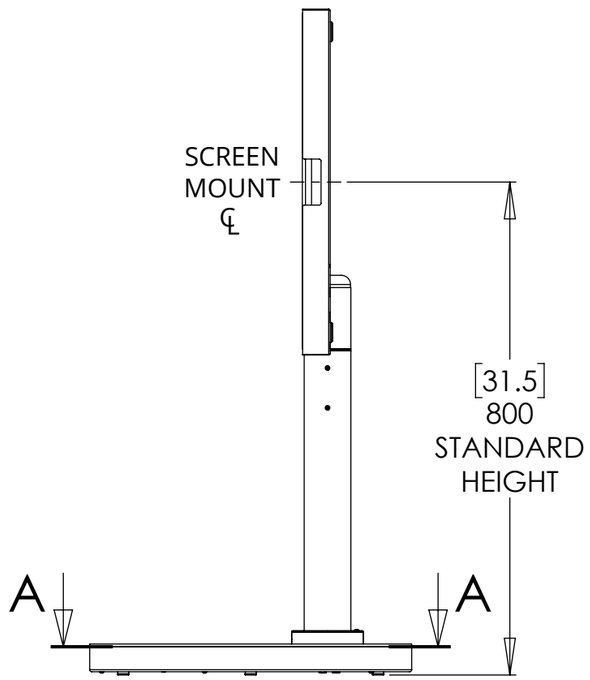


Base Fixing Holes

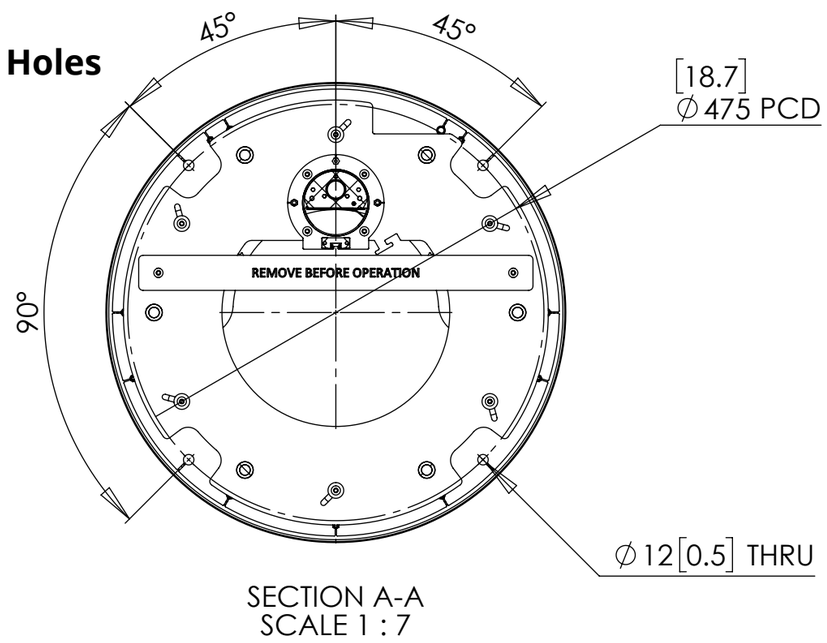

SECTION A-A
SCALE 1 : 7

Screen Mount

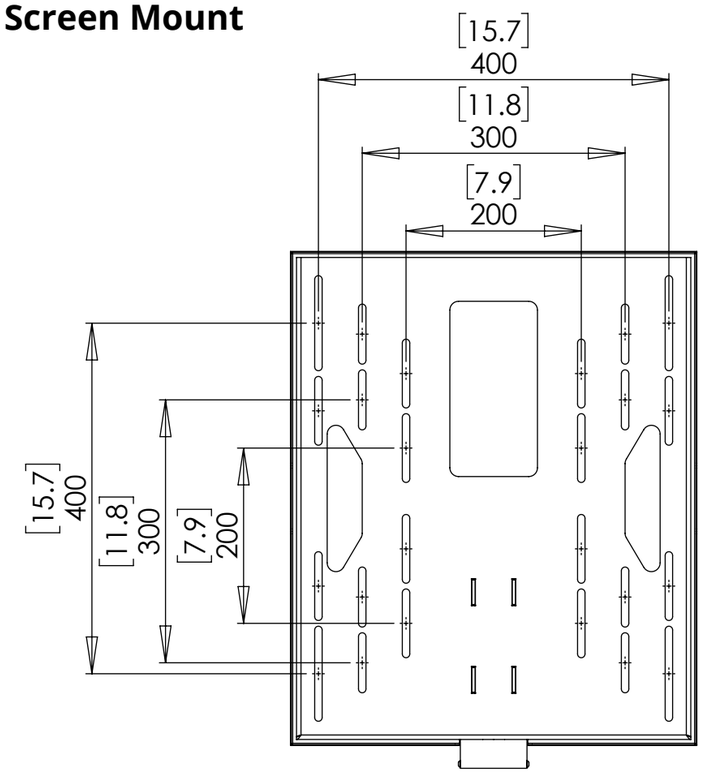

DETAIL B
SCALE 1 : 7

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 002
SHEET 3


FME
FLOOR MOUNT ELECTRIC


MOVEMENT DETAILS

The FME enables a screen to be
rotated up to 60 in both directions from center.

Software allows intermediate positions to be learnt and selected
using the IR remote.

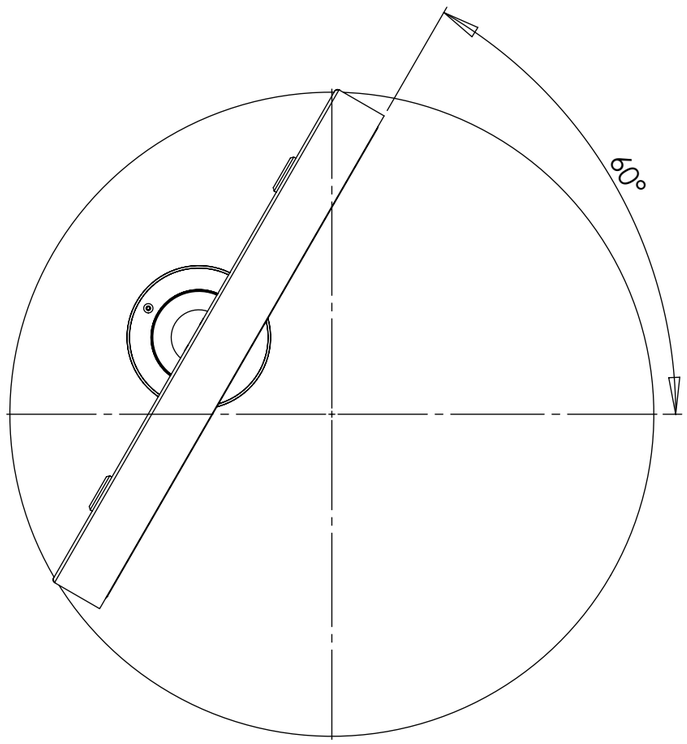

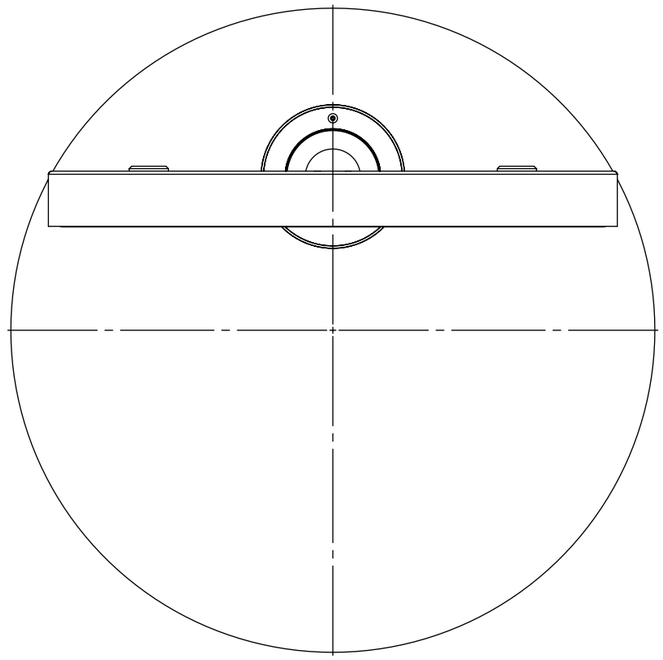

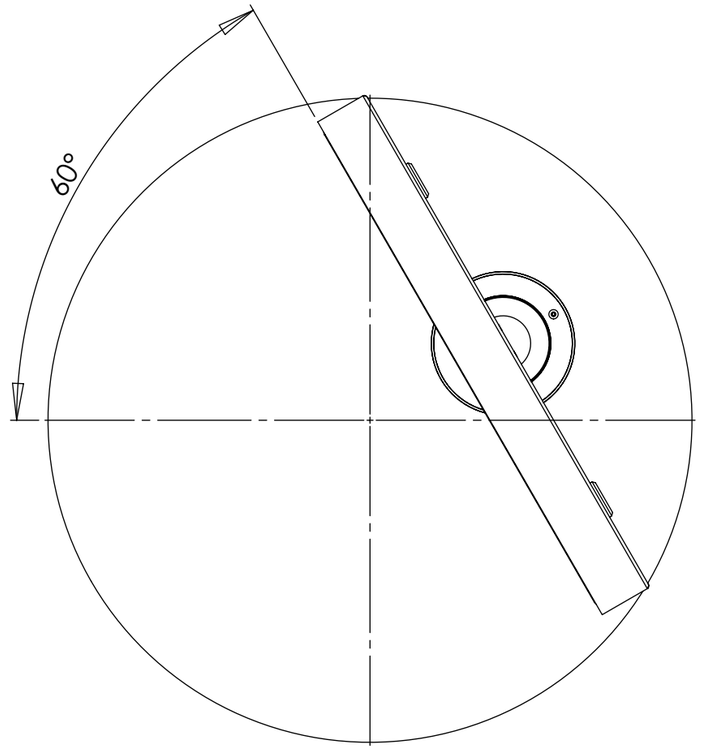

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
WWW.**FUTUREAUTOMATION**.NET