
future automation

# FSA2

ARTICULATED TV WALL MOUNT 26"-37"

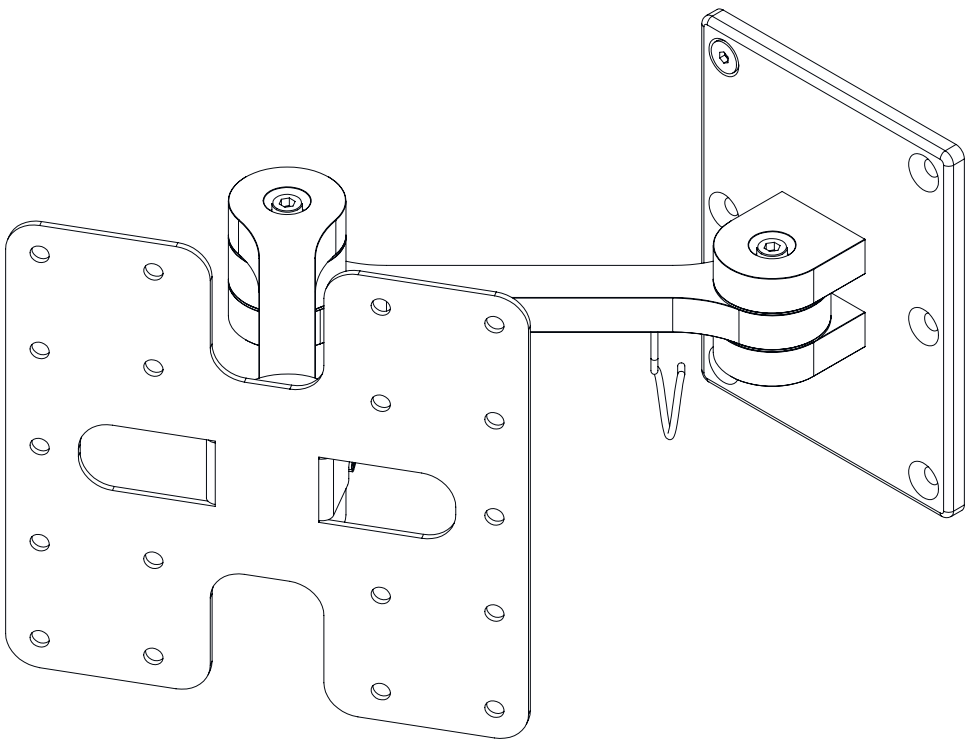

## INSTALLATION
## INSTRUCTIONS

ISSUE **002**

# **SAFETY**
# DISCLAIMER

## IMPORTANT SAFETY INSTRUCTIONS BELOW

WARNING: Failure to provide adequate structural strengthening, prior to installation can result in serious personal injury or damage to the equipment. It is the installer's responsibility to ensure the structure to which the component is affixed can support four times the weight of the component and any additional apparatus mounted to the component.

WARNING: Do not exceed the weight capacity for this product as listed below. This can result in serious personal injury or damage to the equipment. It is the installer's responsibility to ensure that the total combined weight of all attached components does not exceed that of the maximum figure stated.

WARNING: Risk of death or serious injury may occur when children climb on audio and/or video equipment or furniture. A remote control or toys placed on the furnishing may encourage a child to climb on the furnishing and as a result the furnishing may tip over on to the child.

WARNING: Risk of death or serious injury may occur. Relocating audio and/or video equipment to furniture not specifically designed to support audio and/or video equipment may result in death or serious injury due to the furnishing collapsing or over turning onto a child or adult.

**WARNING – RISK OF INJURY!**

Only for use with equipment weighing **33LBS (15KG) OR LESS**.

Use with heavier projectors/equipment may lead to instability causing tip over or failure resulting in death or serious injury.

Bracket Suitable for Residential and Commercial Use.

ADDITIONAL WARNINGS:

1. Keep all documentation/instructions after fitting.
2. Read all technical instructions fully before installation and use. It is the installer's responsibility to ensure that all documentation is passed on to the end user and read fully before operation.
3. Do not use near water or outdoors unless the product has been specifically designed to do so.
4. Protect any cables or cords being used near this bracket from being walked on or pinched to prevent damage and risk of injury.
5. Use this product only for its intended purpose as described in the product instructions and only use attachments/ accessories specified by the manufacturer.
6. Do not operate the product if it is damaged in any way, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped. Contact the original installer/manufacturer to arrange repair or return.

WARNING - To reduce the risk of burns, fire, electric shock, or injury to persons:

1. Clean only with a dry cloth and always unplug any electrical items being used in conjunction with this product before cleaning.

Future Sound & Vision trading as Future Automation intend to make this and all documentation as accurate as possible. However, Future Automation makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without prior notice or obligation of any kind. Future Automation makes no representation of warranty, expressed or implied, regarding the information contained herein. Future Automation assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

# PRODUCT WARRANTY
# & RISK ASSESSMENT

## WARRANTY INFORMATION

**WARNING - The warranty offered for this product shall be annulled if the product is used improperly or in a way that is in breach of our Terms of Service.**

Future Automation provides warranty for the mechanism you purchased for the period of **24 months** from the date of purchase, provided that it isn't used for unintended purposes.

Under the warranty, Future Automation aims to either solve the issue remotely (via telephone or email support) or if the mechanism requires a part, arrange a visit to your premises by a Future Automation approved engineer or send replacement items where appropriate.

Warranty repairs will be carried out as quickly as possible, but subject to parts availability. This warranty period is respectively extended for the period of a repair.

A malfunctioning product must be cleaned and placed into suitable packaging to protect against transit damage before organising delivery to a repair workshop.

All the complaints about defects must be submitted to the vendor/installer that sold this product, rather than directly to the manufacturer.

Any part of your system that needs to be replaced during a warranty repair becomes the property of Future Automation.

**The warranty does not cover the following:**

- Damages resulting from improper product use or maintenance.
- Repairs carried out by unauthorized persons.
- Natural wear and tear during operation.
- Damages caused by the buyer.
- Accidental damages caused by a customer or damages caused as a result of careless attitude or usage, or damages caused by natural disasters (natural phenomena).
- Any electrical, or other environmental work external to your Future Automation mechanism including power cuts, surges etc.
- Additional items not supplied by Future Automation although they may have been supplied together by the retailer
- Any 3rd party software products controlling your mechanism
- Any transfer of ownership. Warranty is provided only to the initial purchaser.
- Compensation for loss of use of the product, and consequential loss of any kind.

A separate Safety and Servicing Information document is provided with these instructions (additional copies can be found at www.futureautomation.co.uk/safety), and this document **MUST** be filled out by the approved Future Automation Dealer who is installing the product. This Warranty Sheet must be held by the end user for the duration of the products life and will be referred to during servicing or warranty queries.

The Safety and Servicing Information document also contains two Service History Forms that must be filled in by the approved Future Automation dealer who is performing the first required yearly service of this product.

**One copy of the Service History Form must be held by the customer (along with the Warranty Sheet) and a duplicate copy must be held by the approved Future Automation dealer that performed the service. Missing and/or mismatching documents may delay or invalidate warranty claims.**

Additional Service History Forms can be found on the Future Automation website for further yearly services.

## RISK ASSESSMENT INFORMATION

It is the installer's responsibility to perform a risk assessment of installed products. Future Automation can provide guidelines to installers/dealer about what should be included in a risk assessment, but due to the individual nuances of each location/site, Future Automation cannot provide a full list of areas to risk assess.

For full risk assessment and safety information please view our Safety and Servicing guide available at www.futureautomation.net/safety

# **GUIDE**
# CONTENTS


SAFETY DISCLAIMER 1

PRODUCT WARRANTY & RISK ASSESSMENT 2

GUIDE CONTENTS 3

PACKAGE CONTENTS 4

MOUNT POSITIONING 5

WALL FIXING 6

SCREEN MOUNTING 7


# **PACKAGE**
# CONTENTS

**1 - FSA2**

1.1 - FSA2 WALL PLATE
1.2 - FSA2 ARMS
1.3 - FSA2 SCREEN PLATE
1.4 - FSA2 CABLE MANAGEMENT HOOK


**ITEMS NOT SHOWN ON PAGE**

FSA2 ACCESSORY PACK:
- SCREEN FIXINGS PACK (MULTI-PACK OF NUTS, BOLTS, SPACERS AND WASHERS)

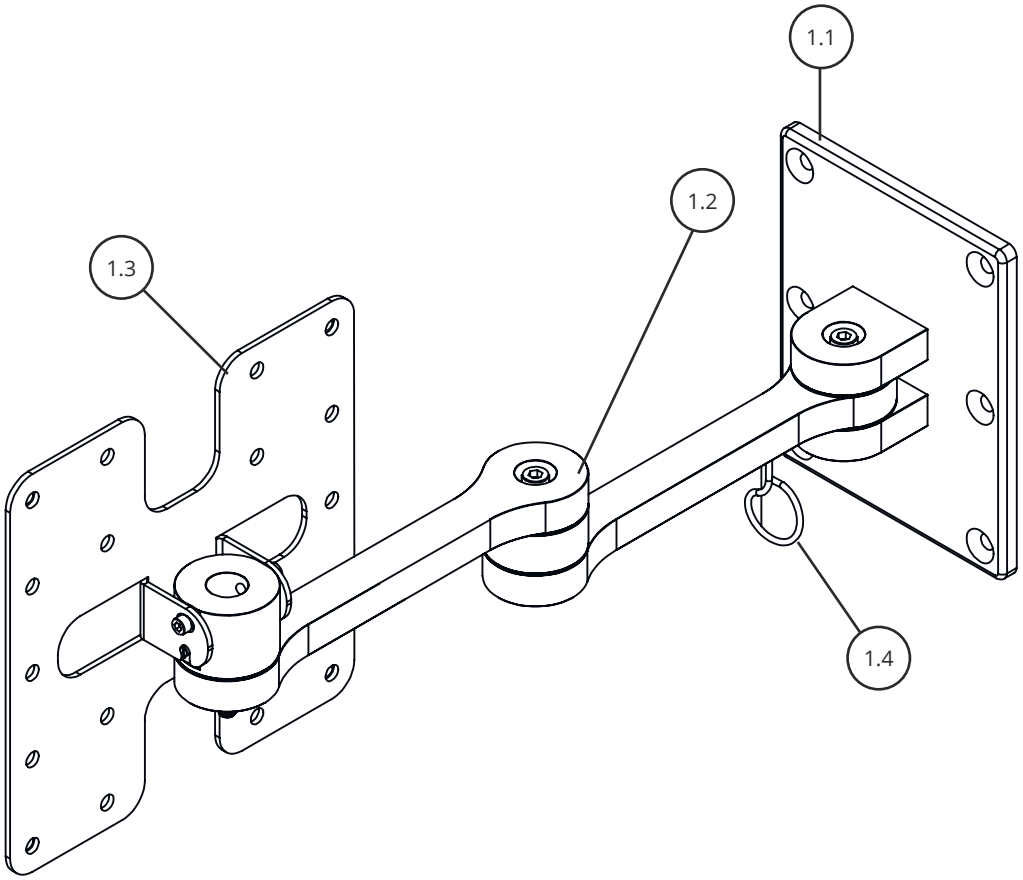


# **MOUNT**
# POSITIONING

## 1

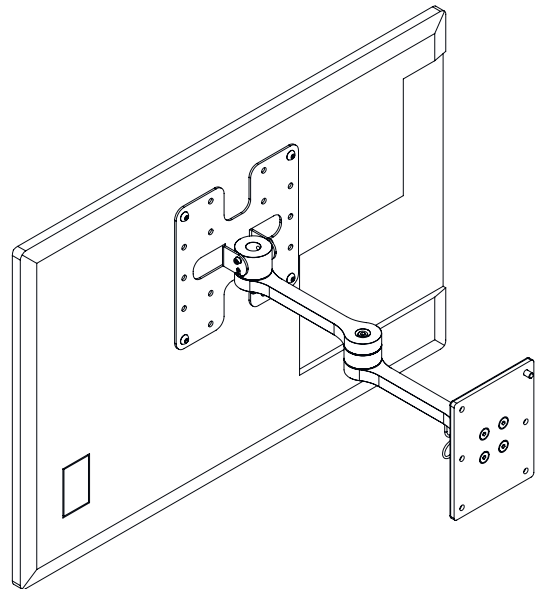

- Place the FSA2 on the back of the screen, lining up the mount holes in the FSA2 Screen Plate with the VESA mount holes in the back of the TV.

## 2

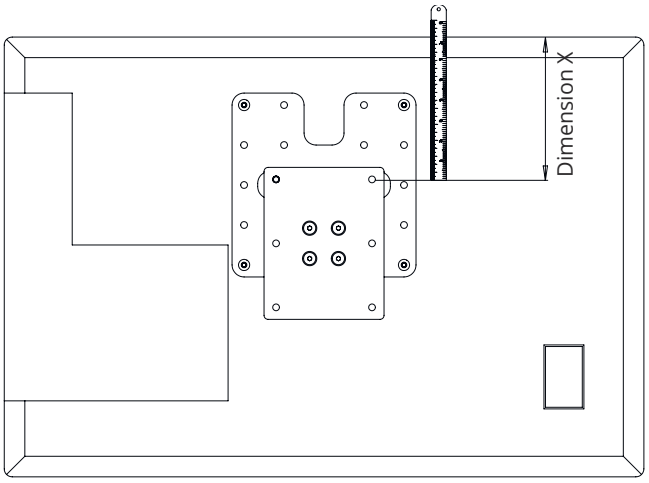



- Measure from the top of the screen, down to the top mounting hole on the Wall Plate (Dimension X) to determine positioning of the top wall fixing holes.

  **NOTE: IF THE DISPLAY IS NOT VESA COMPATIBLE AN ADAPTER WILL NEED TO BE ADDED AT THIS STAGE.**


# **WALL**
# FIXING

## 1

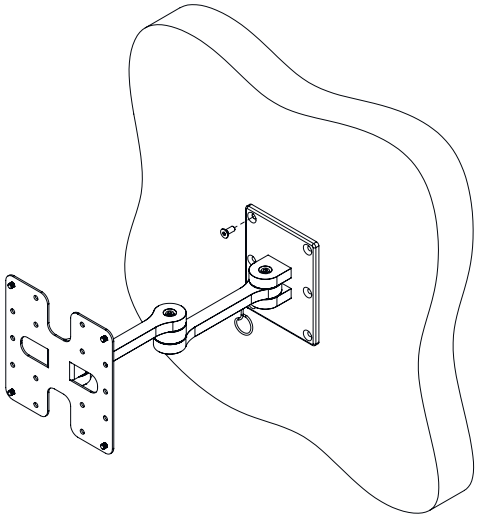

- The top fixing hole for the FSA2 wall plate should be located the distance of Dimension X (measured on page 5) down from the top of the desired screen position.
- Secure the FSA2 wall plate to the wall with one suitable fixing (not supplied) so the bracket can support its own weight.


## 2

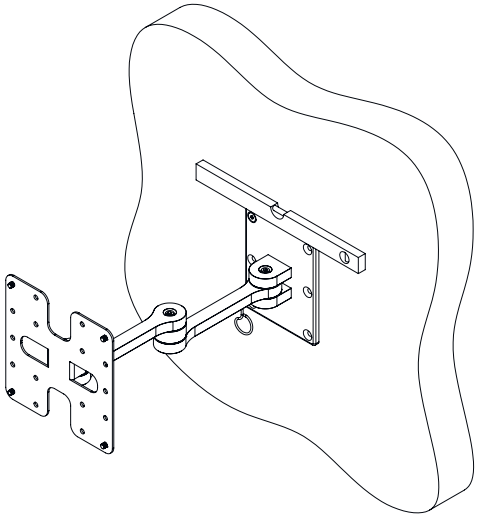

- Using a spirit level, make sure the bracket is level then mark and drill the remaining fixing holes in the wall.
- Using suitable fixings (not supplied) fully secure the bracket to the wall.

# **SCREEN**
# MOUNTING


## 1

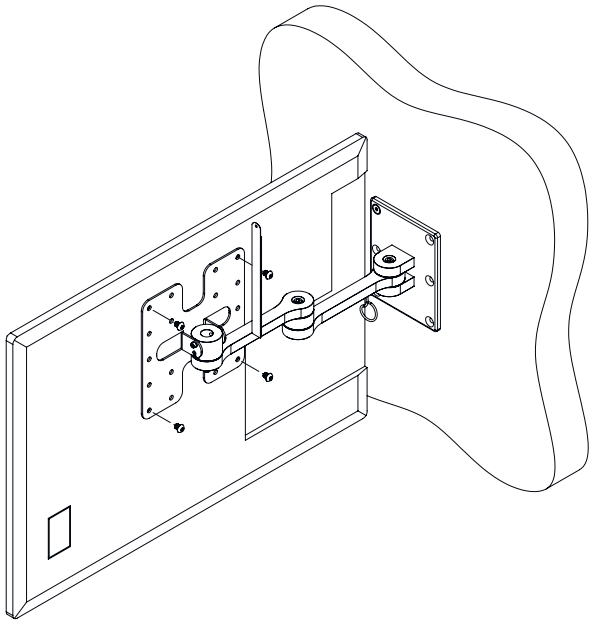

- Fully extend the bracket and turn the FSA2 screen mount to 90° for better access. Hold the screen up to the FSA2 screen mount and fix in place using suitable fixings from the provided fixings pack.

  **NOTE: SCREENS WITH UNEVEN BACKS OR RECESSED MOUNT HOLES MAY REQUIRE SPACERS TO CORRECTLY MOUNT TO THE BRACKET**

## 2

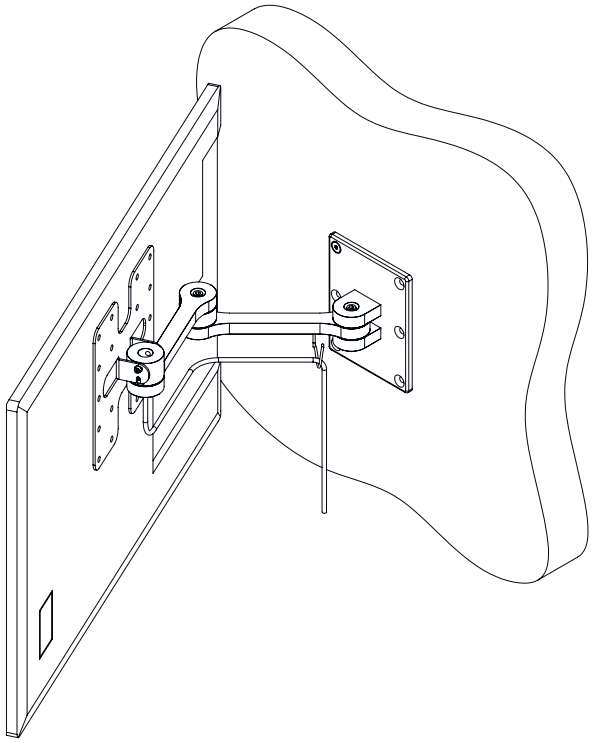

- Run cables to the back of the TV and secure in place using the provide cable management hook.

# NOTES:

# NOTES:




**EUROPEAN OFFICE**

**Address:**
Unit 6-8
Brunel Road
Bedford
Bedfordshire
MK41 9TG

**Phone:** +44 (0) 1438 833577
**Email:** info@futureautomation.co.uk

**Office Hours:**
Mon - Fri 8:00 to 17:30 GMT
Saturday & Sunday - Closed

**NORTH AMERICAN OFFICE**

**Address:**
Enterprise Park
127 Venture Drive
Dover
NH
03820

**Phone:** +1 (603) 742 9181
**Email:** info@futureautomation.net

**Office Hours:**
Mon - Fri 7:00 to 17:00 EST
Saturday & Sunday - Closed