
PS40
PULL & SWIVEL MANUAL WALL MOUNT

future automation

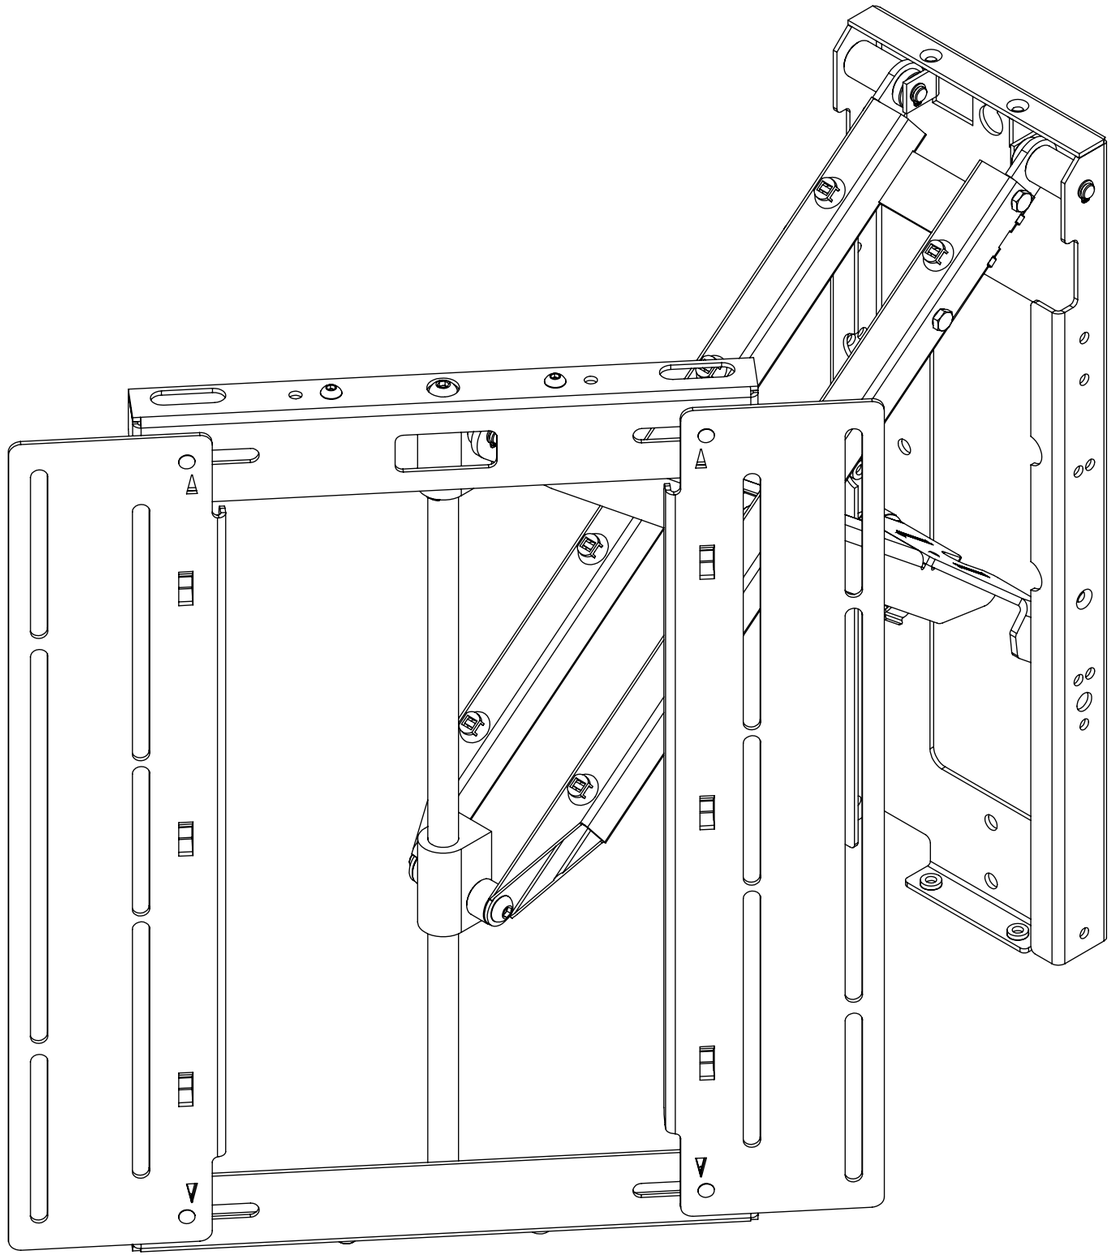

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 009
SHEET 1

PS40
PULL & SWIVEL MANUAL WALL MOUNT

SPECIFICATION	MEASUREMENTS
Screen Sizes	40" - 75"
Maximum Weight Capacity	60Kg (132lb)
Maximum Extension From Wall	400mm (15 3/4")
Minimum Depth From Wall	55mm (2 3/16")
Packaging Dimensions	335mm x 515mm x 70mm (13 1 3/16" x 20 1/4" x 2 3/4")
Shipping Weight	12Kg (26lb)
Maximum Rotation	50˚ - Bi-directional with 43" screen - 38˚ with 55" - 32˚ with 65" - 27˚ with 75"
Movement Type	Manual
Mounting Patterns Supported	VESA 400, 300, 200, 100 W x 400, 300, 200, 100 H
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Wall Boxes
Package Contents	Mechanism
Marine Suitable	No


PS40
PULL & SWIVEL MANUAL WALL MOUNT

SCREEN ANGLES


The views below show the approximate maximum swivel angles achievable for varying screen sizes.

NOTE: The maximum swivel angle achievable is 50° regardless of screen size


43"

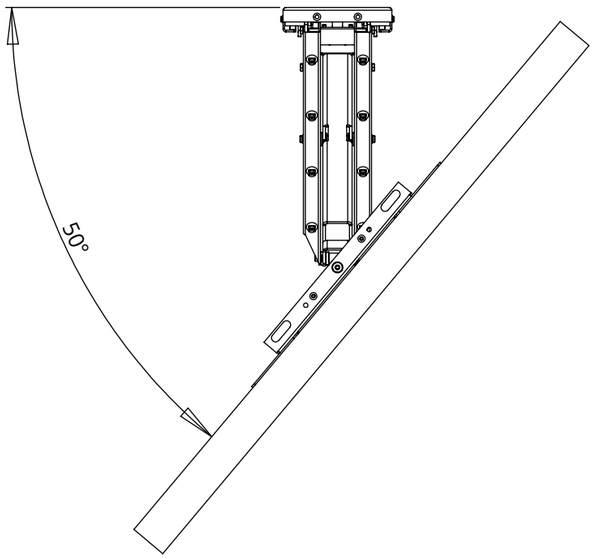


55"

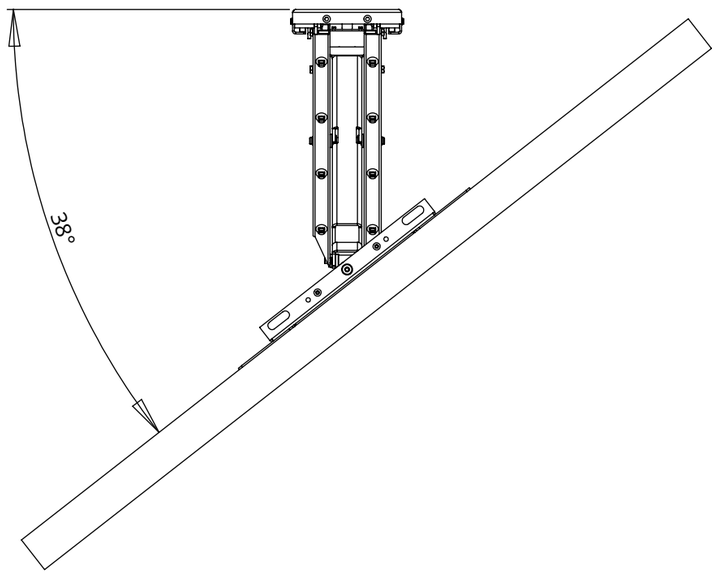

65"

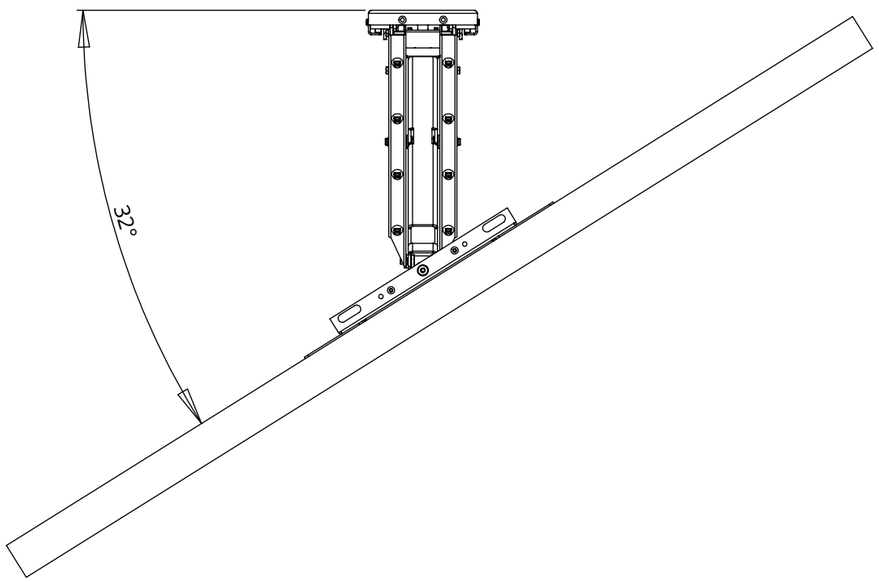

75"

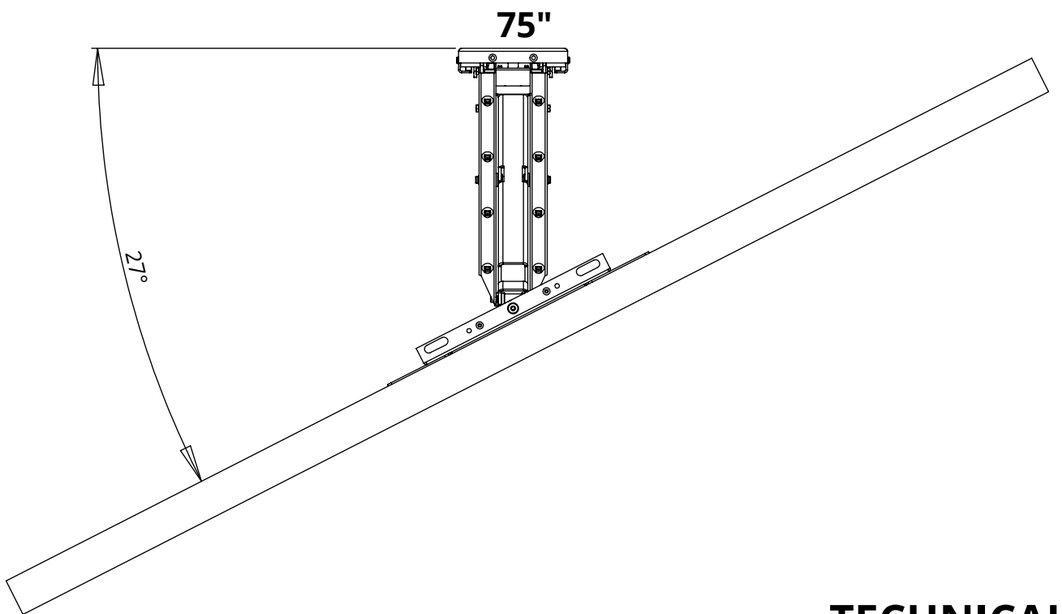


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 009
SHEET 3


PS40
PULL & SWIVEL MANUAL WALL MOUNT

CABLE ROUTING & SOCKET PLACEMENT

Route the screen cables as shown below ensuring sufficient slack at moving points and secure in place using the integrated cable tie points.

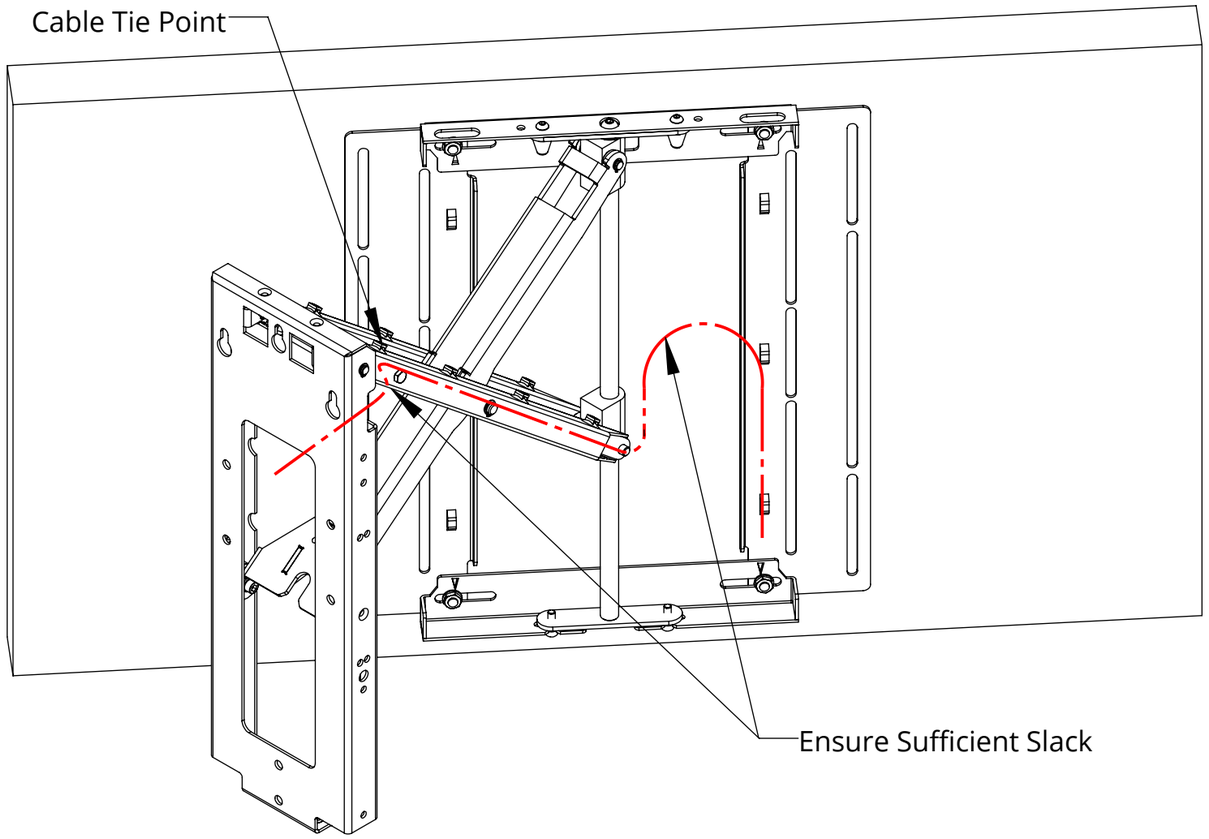

Wall sockets should be ideally placed as shown outside of the bracket footprint to maximise space for cable routing

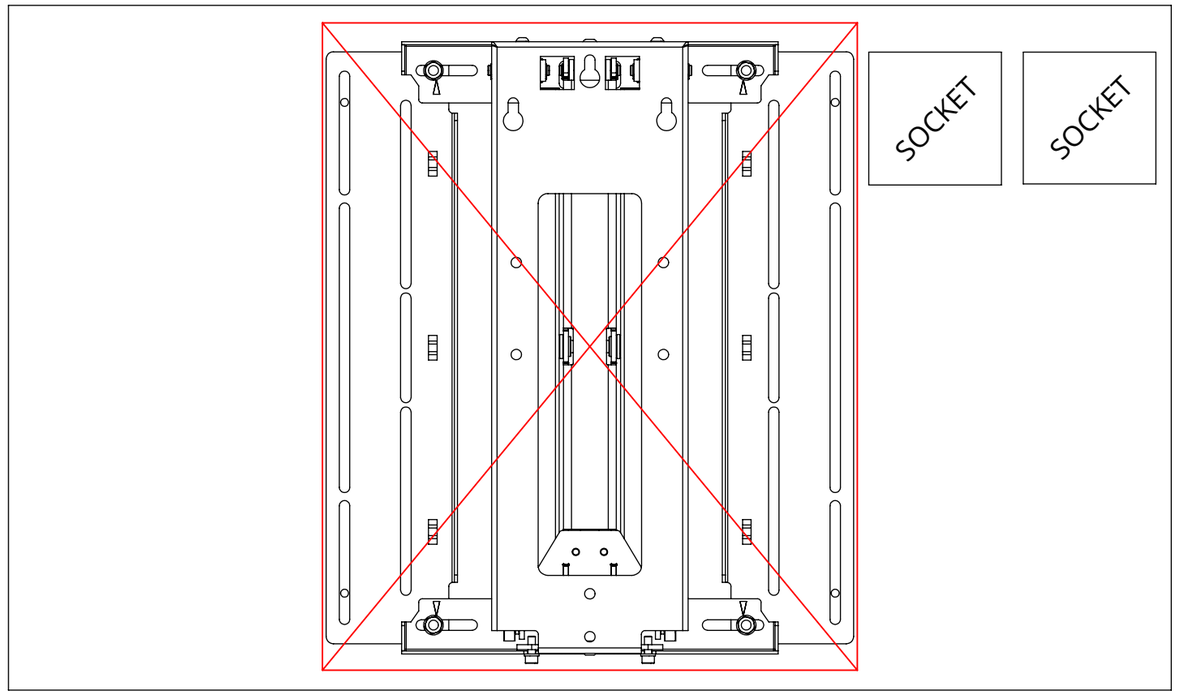



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

PS40
PULL & SWIVEL MANUAL WALL MOUNT


future automation

GENERAL DIMENSIONS

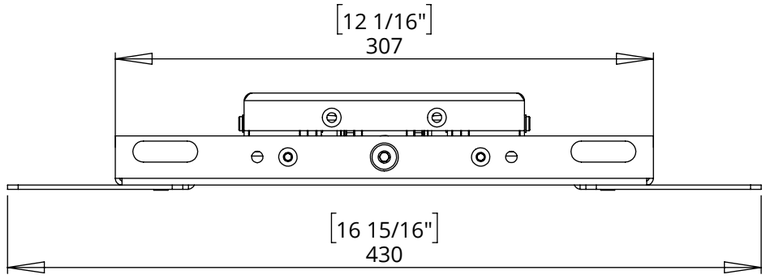


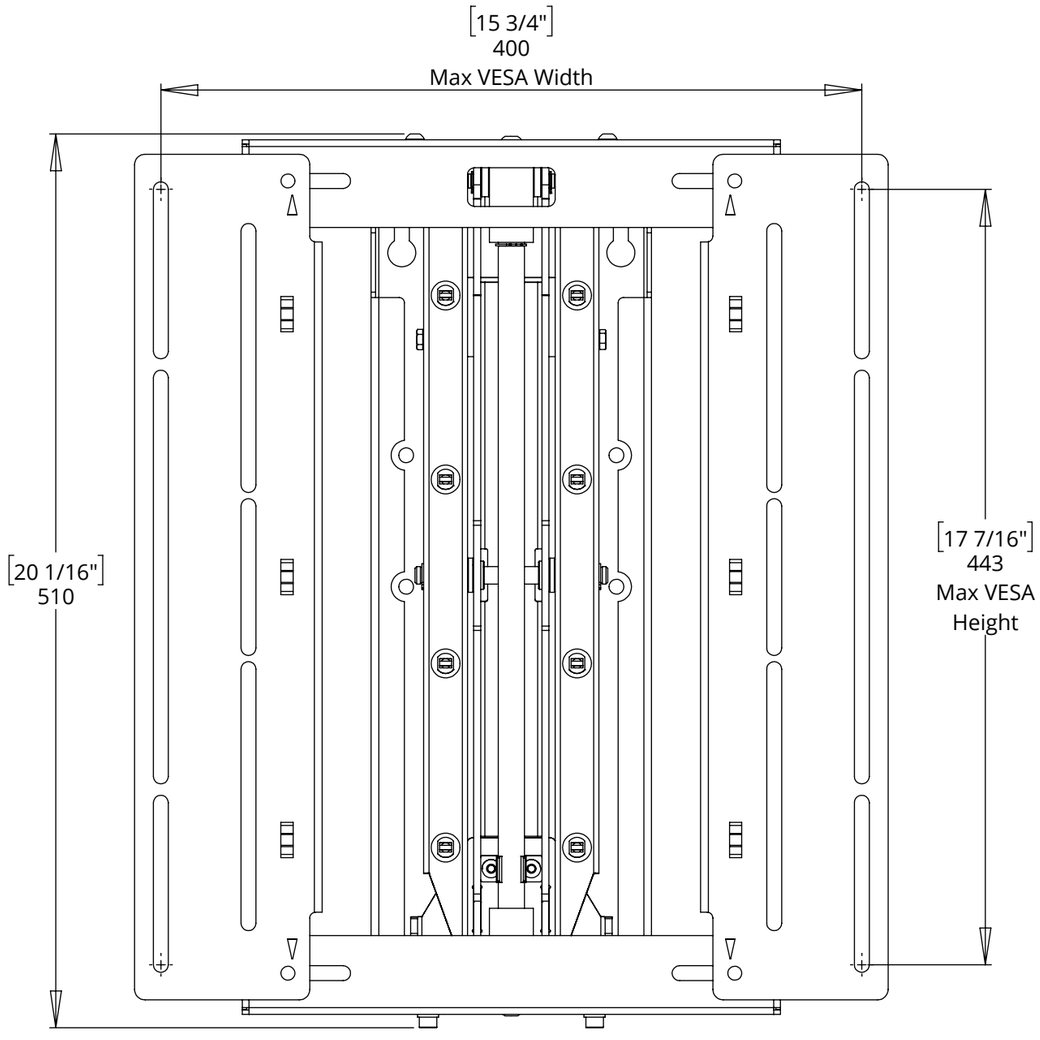

| Closed |

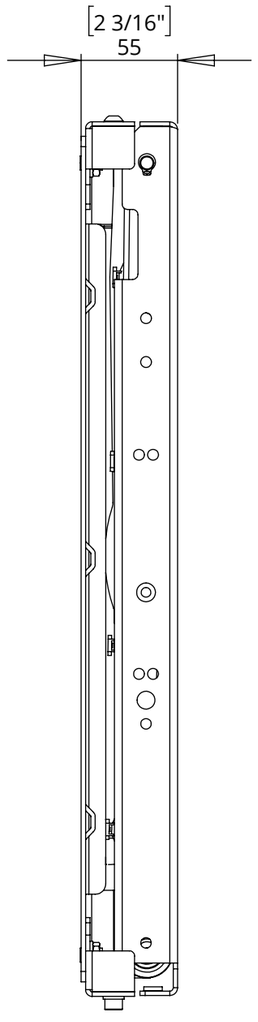

| Full Extension |

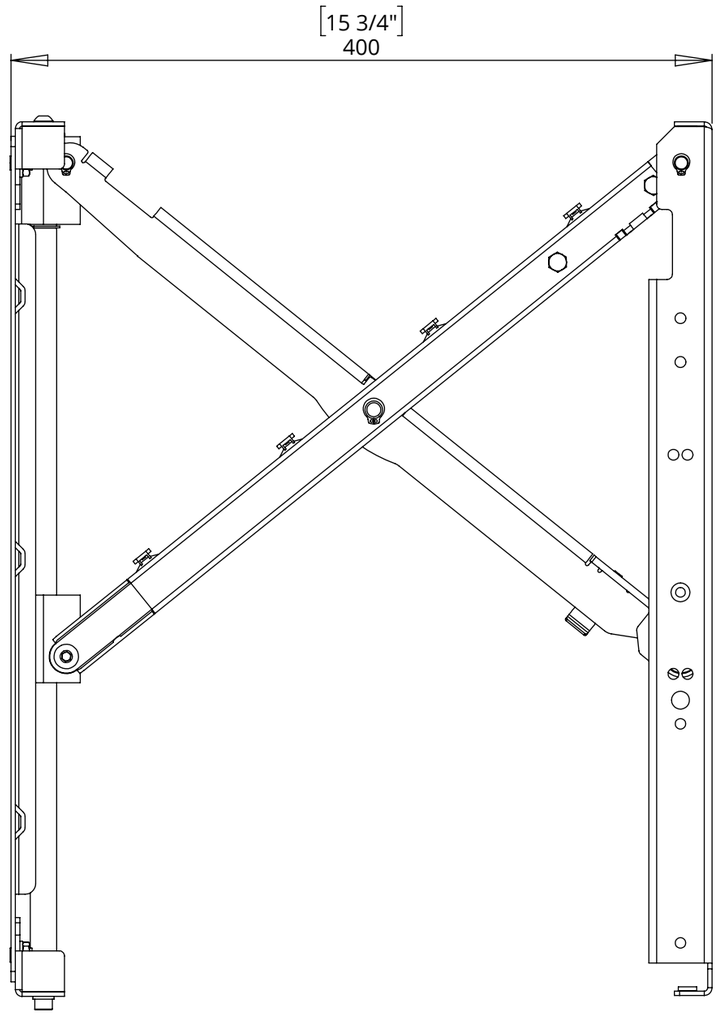

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 009
SHEET 5

PS40
PULL & SWIVEL MANUAL WALL MOUNT

MOUTING DIMENSIONS

Wall Plate


Make sure the wall that the bracket is being mounted to is secure and strong enough to support the bracket and screen.

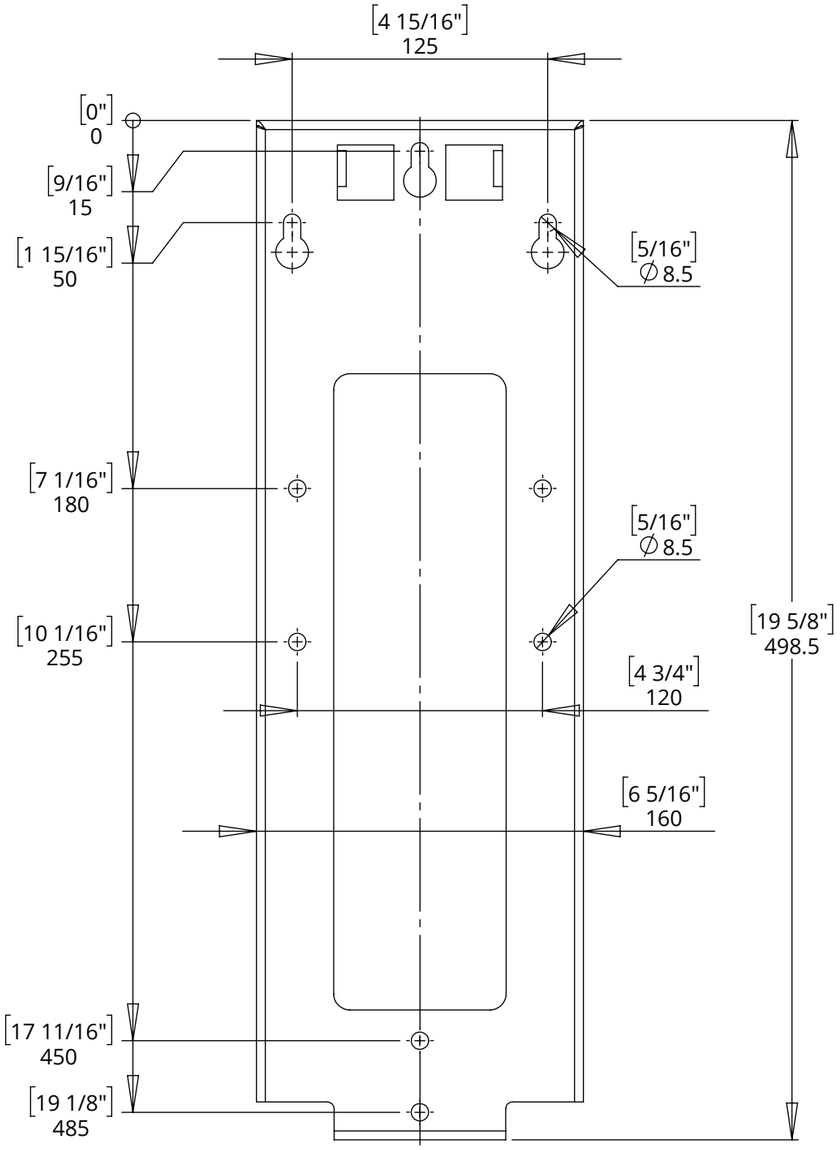


Stud Rail Kit

The Stud Rail Kit is an optional addition that allows the PS40 to be easily installed on a stud wall and allows for the lateral position of the mount to be adjusted if desired. The Stud rail Kit can be purchased separately under the code PS-SRK.

Uprights hidden for clarity.

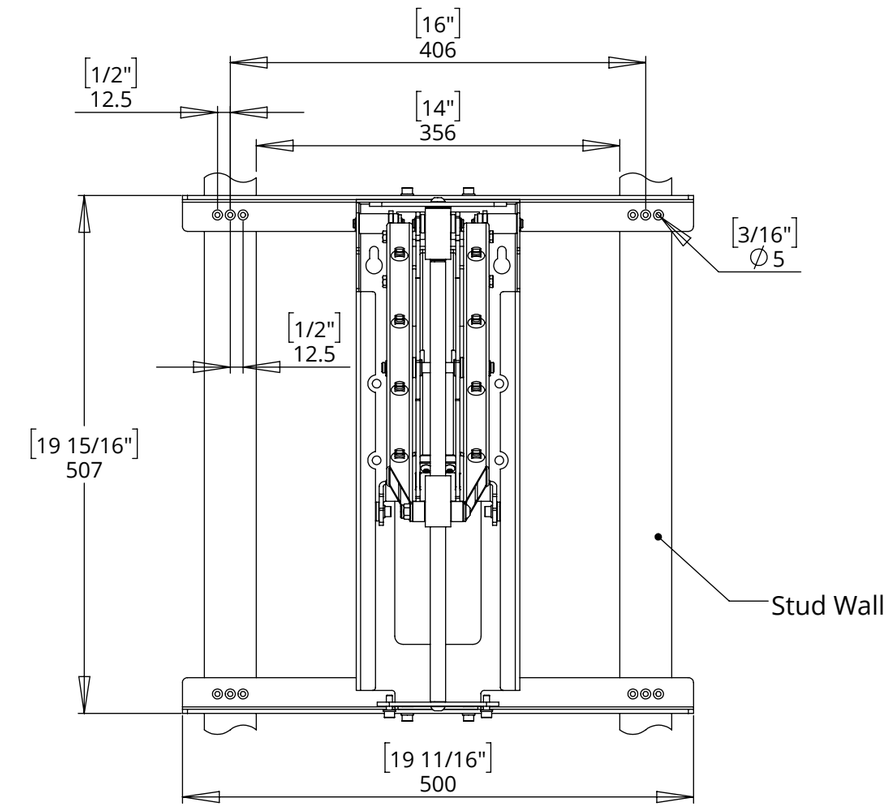

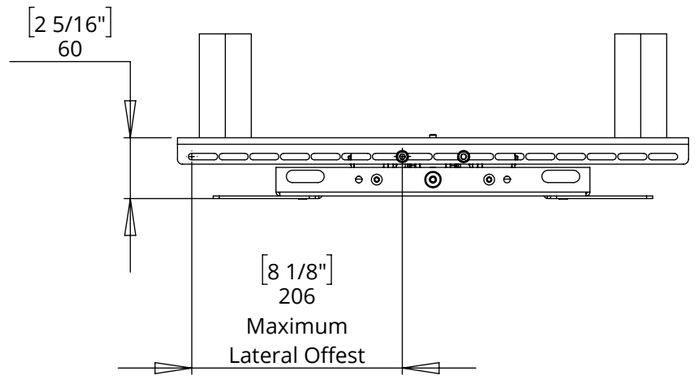

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 009
SHEET 6

PS40
PULL & SWIVEL MANUAL WALL MOUNT


WALL BOX OPTIONS

The PS40 can be installed in each of the wall boxes shown below for an ultra slim installation, whilst still providing space for additional accessories such as HDMI baluns, Apple TV, Samsung One Connect etc. See corresponding technical sheet for more information.


Each wall box comes complete with:
- PS bracket mount rails
- Set of 2 accessory clamp brackets
- Set of trim strips
- WattBox mounting kit

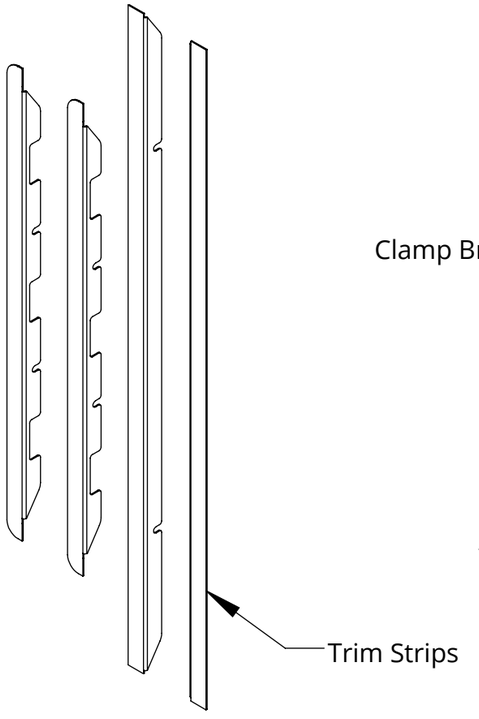


WB21

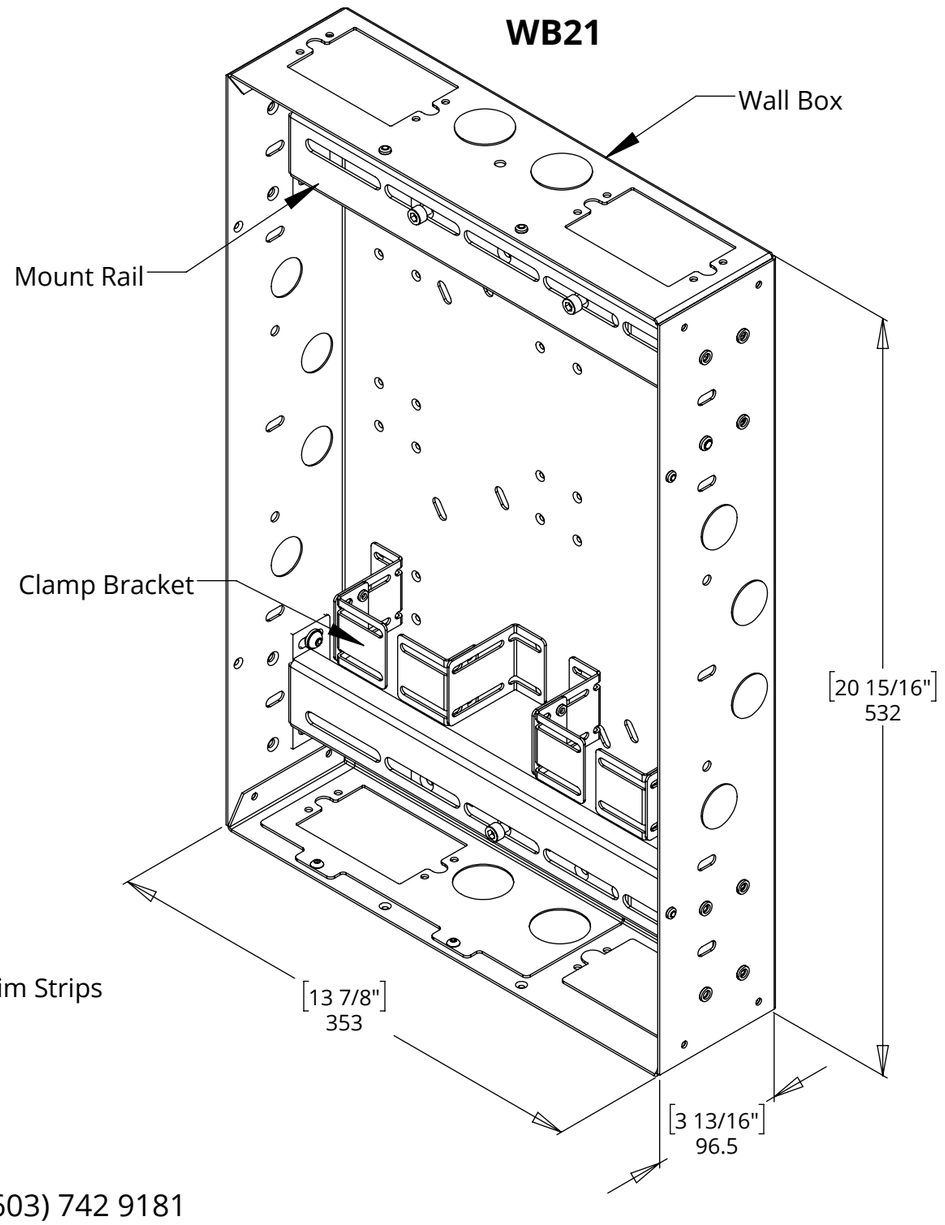

WB26

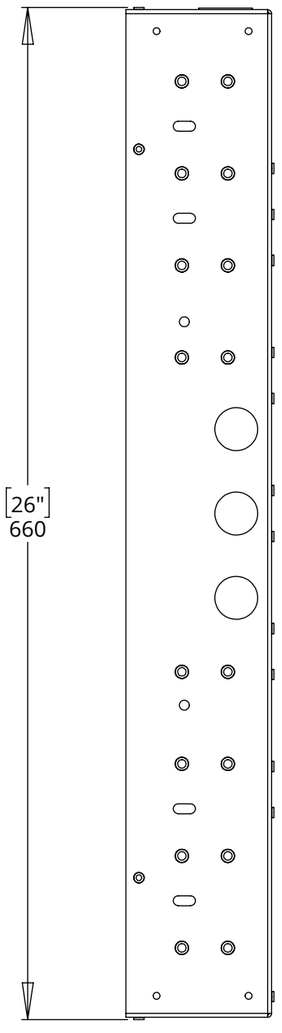

WB31

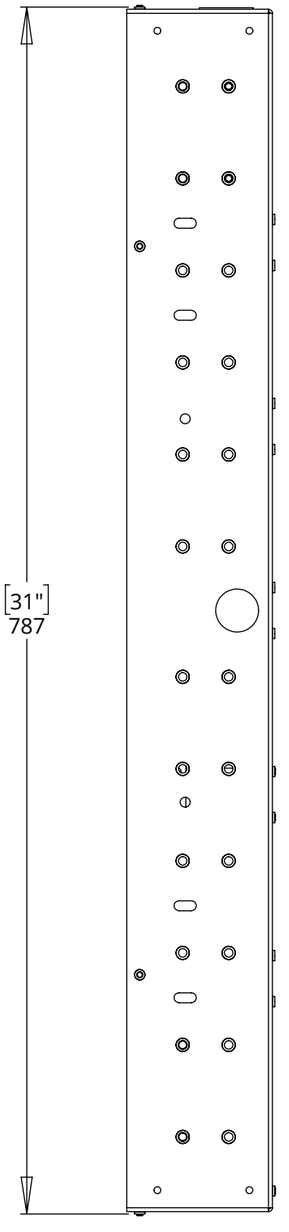

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET