

WT-ZIPP-75
LARGE ZIPPED WINDOW TREATMENT

WT-ZIPP-75


75mm Tube
Approx 3.6m [142"] Max Width, 6.0m [236"] Max Drop; Upto 20sq/m [215sq/ft]

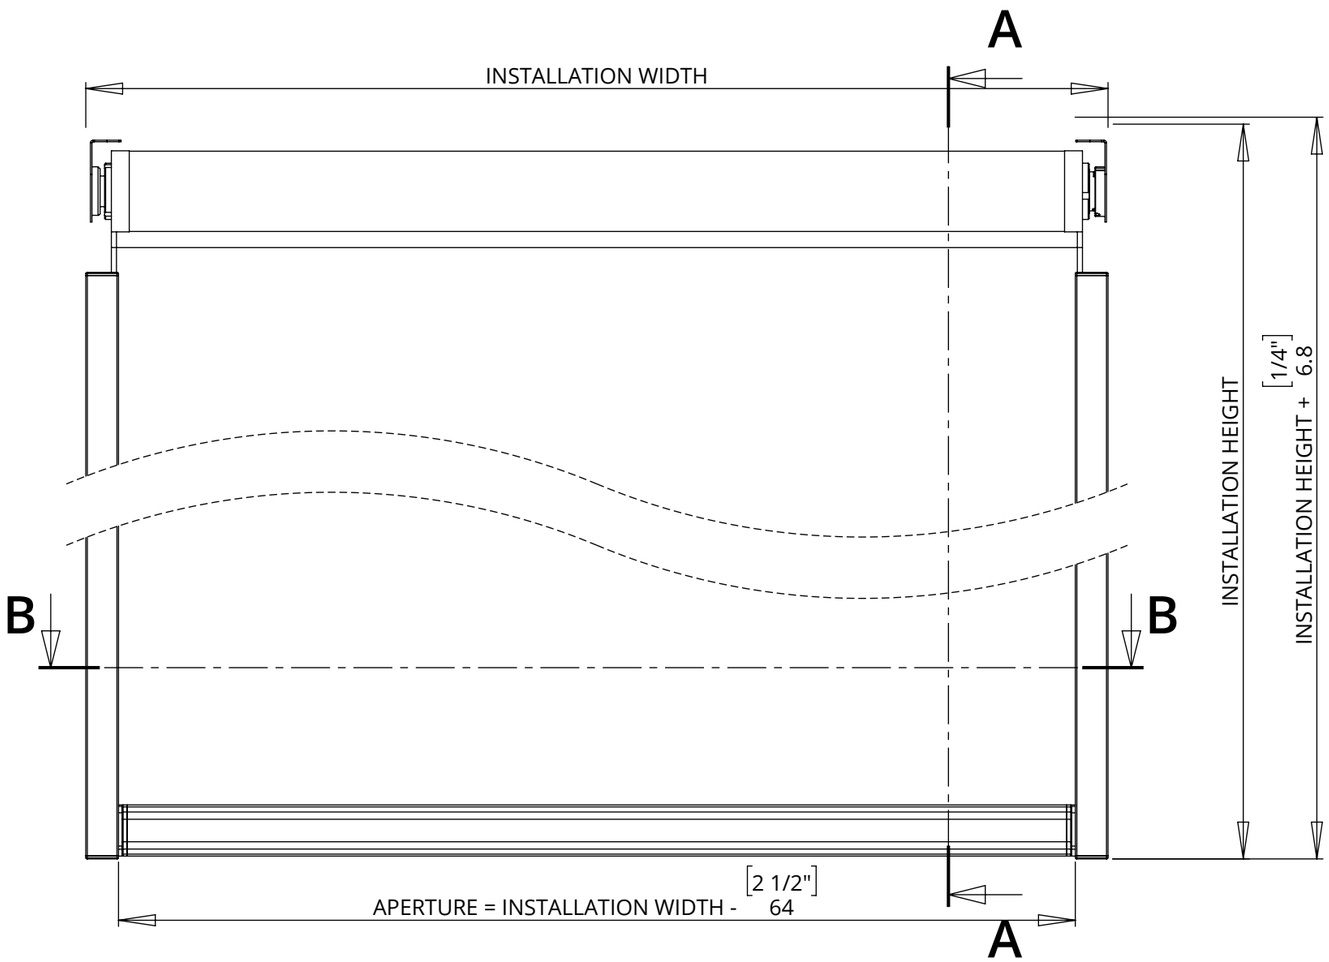


SECTION B-B

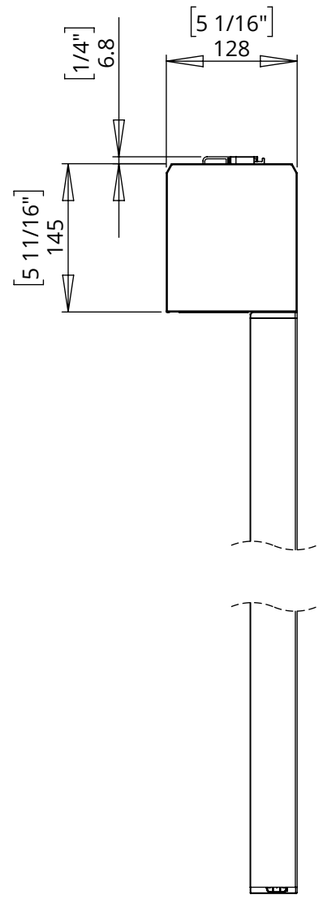


SECTION A-A

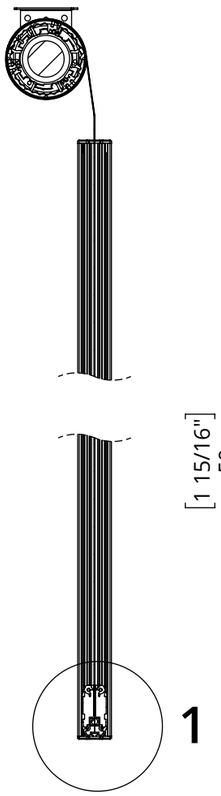

DETAIL 1
(HEMBAR)
SCALE 1 : 1

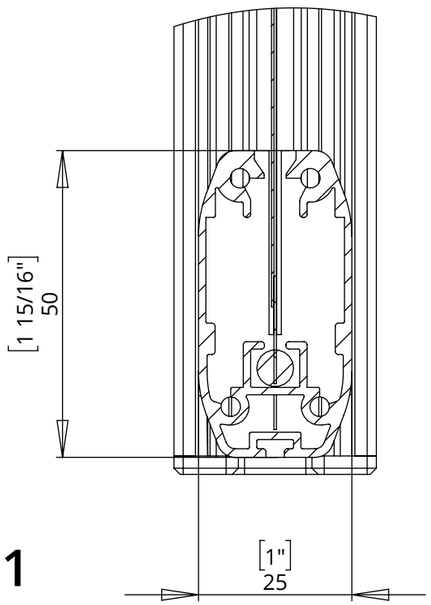

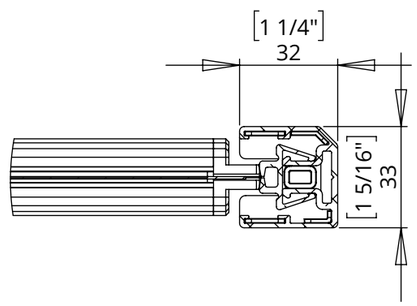

DETAIL 2
(SIDE CHANNELS)
SCALE 1 : 2


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


Please note that information is subject to change, check Website for latest technical information or email info@futureautomation.net

TECHNICAL SHEET
ISSUE 002
SHEET 1

WT-ZIPP-75
LARGE ZIPPED WINDOW TREATMENT

WT-ZIPP-75

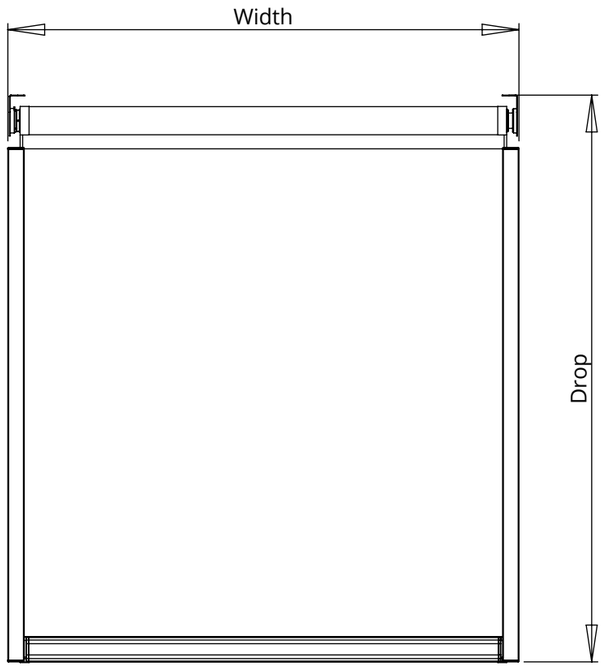

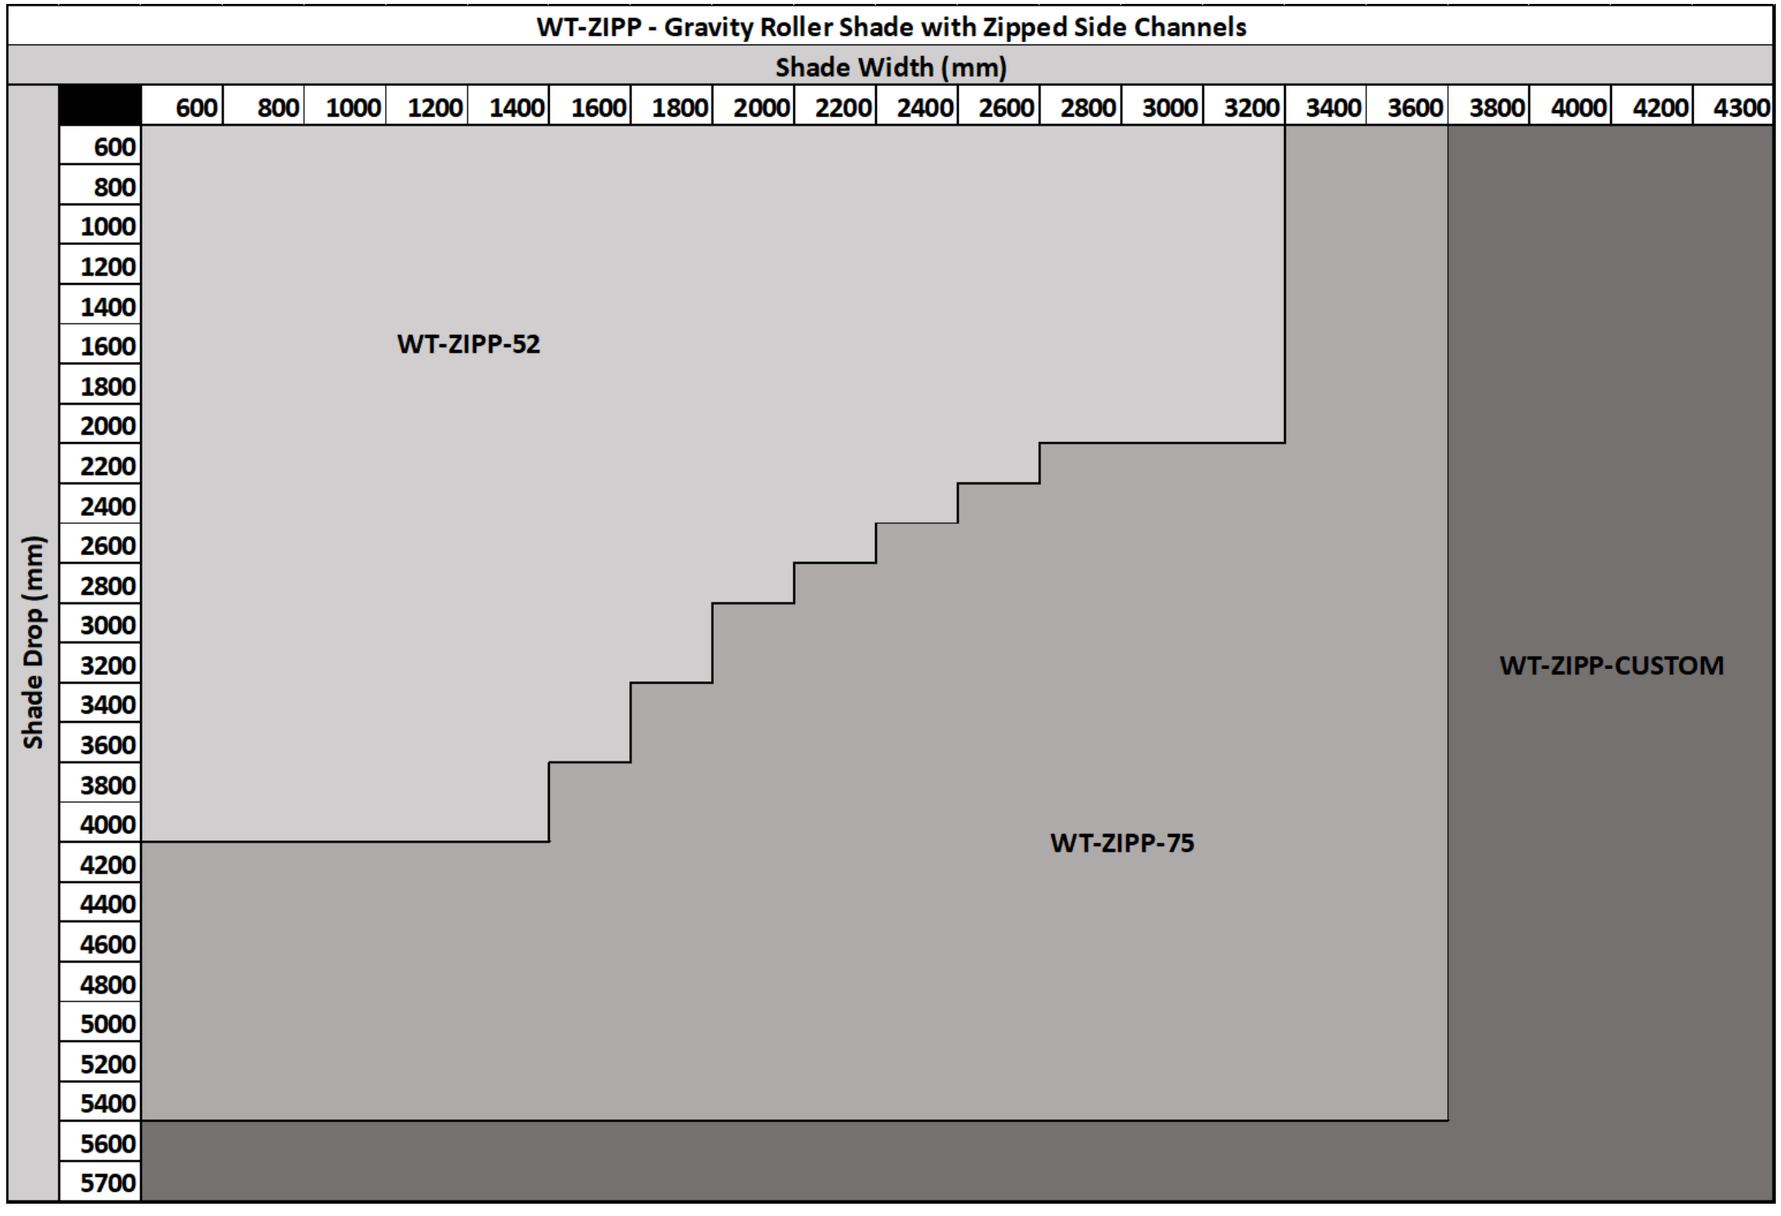


The above table is a size guide only and maximum dimensions are dependent on fabric and motor specifications.
Please check with Future Automation for a confirmed specification

WT-ZIPP-75
LARGE ZIPPED WINDOW TREATMENT

future automation

MOUNTING


Different fitting options require different measurements and installations. Shades can be mounted in a pocket, inside the window reveal or outside the reveal.

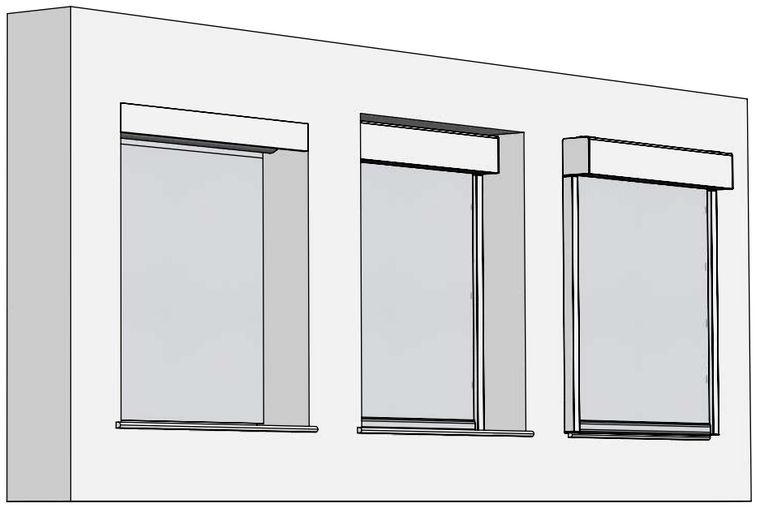

POCKET / RECESS | INSIDE MOUNT | OUTSIDE MOUNT

MOTOR SIDE

Motor drive can be specified to be installed on left or right depending on location of cabling or power points.
(always when looking at window)

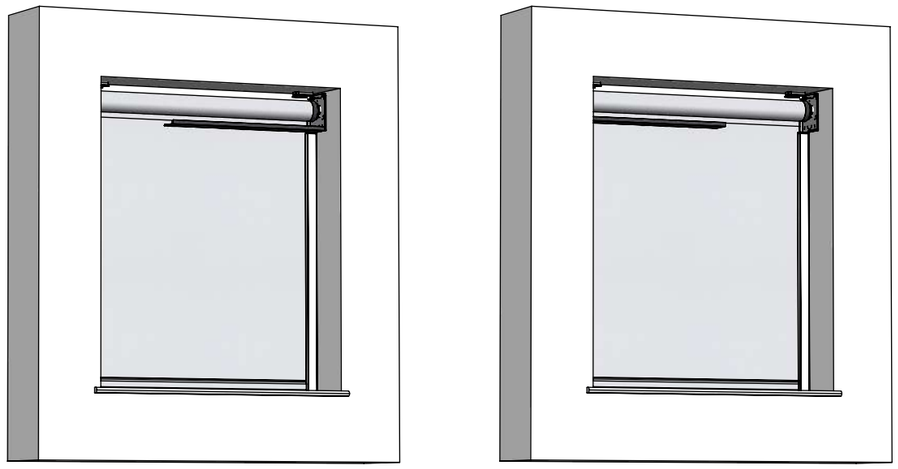


MOTOR LEFT


MOTOR RIGHT

ROLL DIRECTION

Certain installations may require the shade to be mounted in the other orientation to clear door or window hardware and will affect how the shade is manufactured.

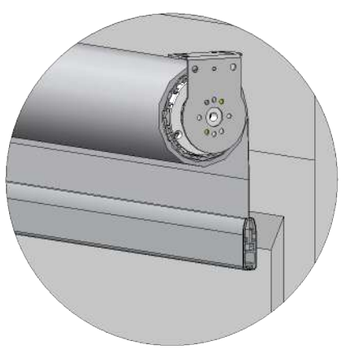


STANDARD (OFF THE BACK)

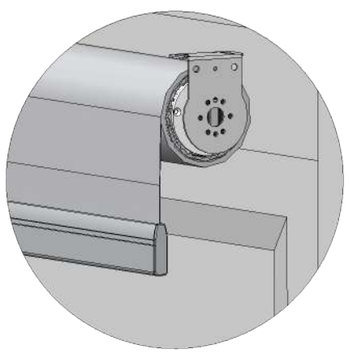

REVERSE (OFF THE FRONT)

HEMBAR SELECTION

1. Open Pocket - Round Bar (Non Zip Only)
2. Open Pocket - Flat Oval (Non Zip Only)
3. Small Exposed (Non Zip Only)
4. **Medium Exposed - Chamfered (Zip / Non Zip)**
5. Medium Exposed - Square (Zip / Non Zip)
6. Large Exposed - Square (Zip / Non Zip)
7. Designer Tapered (Non Zip Only)

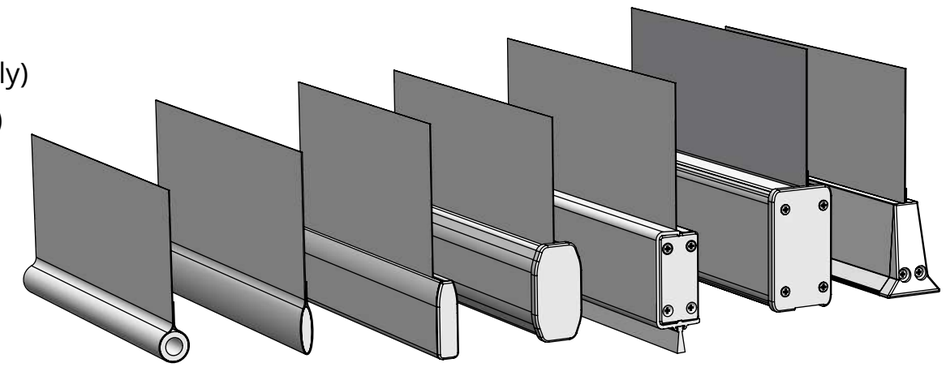

1. 2. 3. 4. 5. 6. 7.

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

Please note that information is subject to change, check Website for latest technical information or email info@futureautomation.net