
LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

future automation

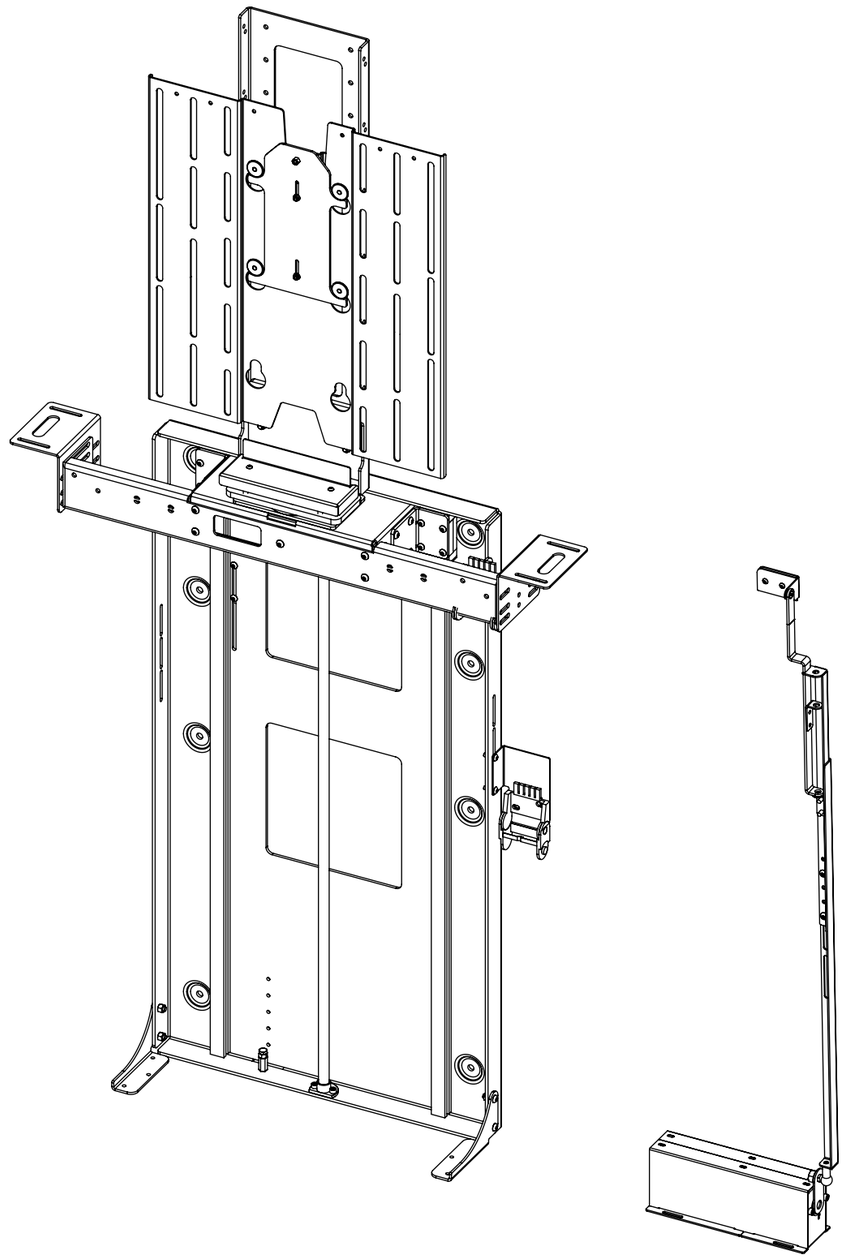

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 1

LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

future automation

SPECIFICATION	MEASUREMENTS
Maximum Screen Height	795mm (31 5/16")
Maximum Lifting Capacity	50Kg (110lb)
Maximum Lifting Capacity (Marine)	30Kg (66lb)
Internal Cabinet Height	950mm (37 3/8")
Decibel Rating	52 dB
Packaging Dimensions	1150 x 850 x 330mm (45 1/4 x 33 7/16 x 13")
Shipping Weight	37Kg (82lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption	250 - 500W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure, RF Available
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control
Marine Suitable	Yes

LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

future automation

CABLE ROUTING


The LSM has an easily removable Mount Cover that cables from the screen can be routed underneath. Cables then travel through the centre of the Mount Boss and into the beam. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.

Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.

SCREEN CABLES


MECHANISM CABLES

POWER CABLE

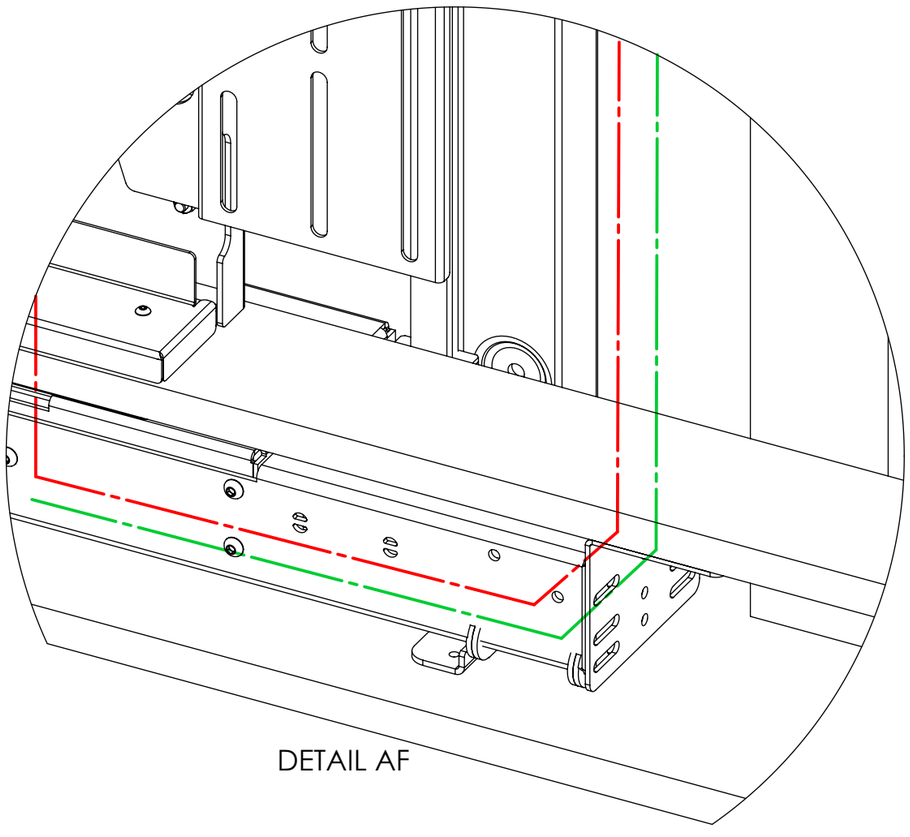

DETAIL AF

[1 1/2"]
38
Maximum Depth of Conduit

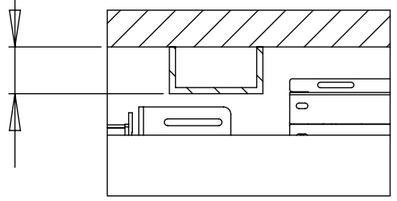

Top View


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 015
SHEET 3


LSM-EFA-6

LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

MECHANISM UP - IN CABINET

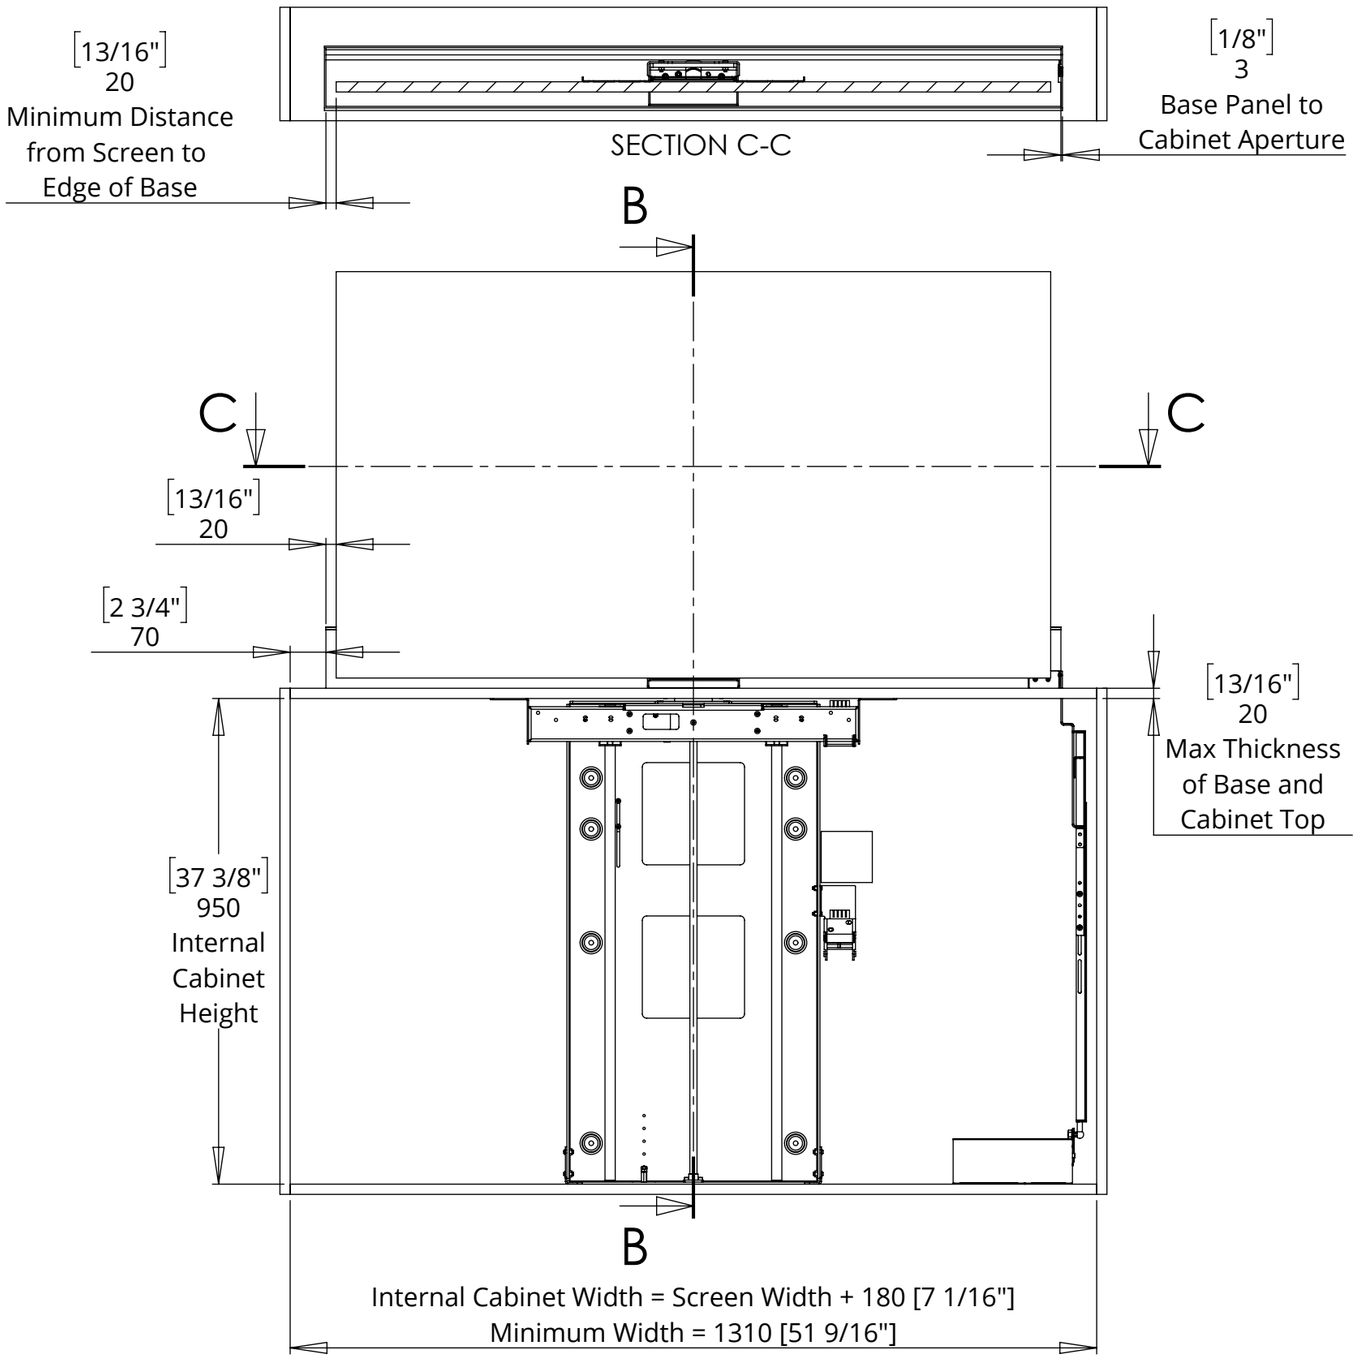

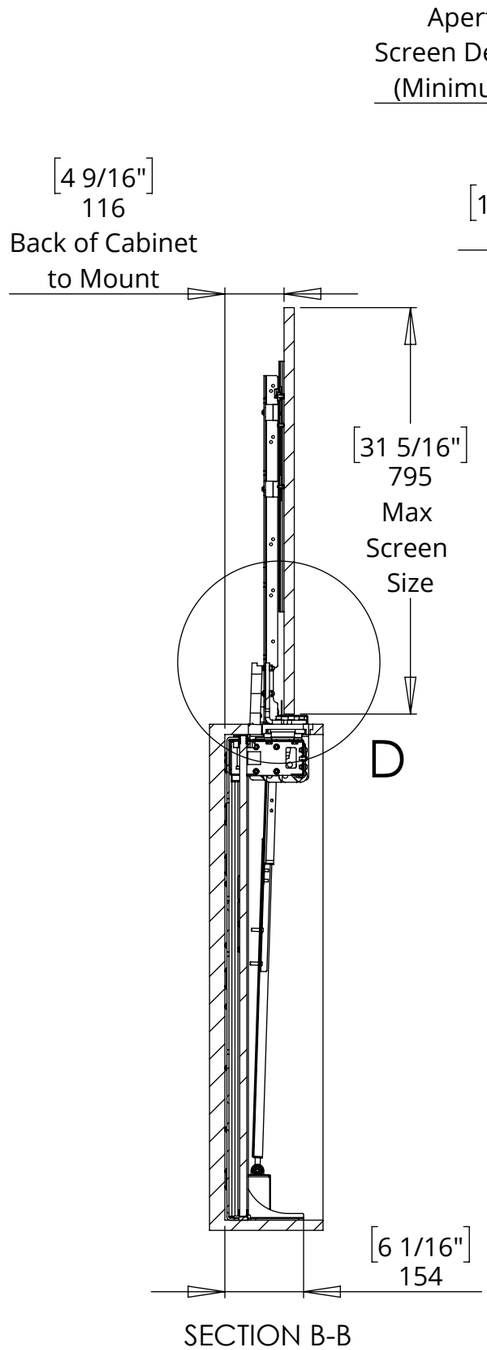

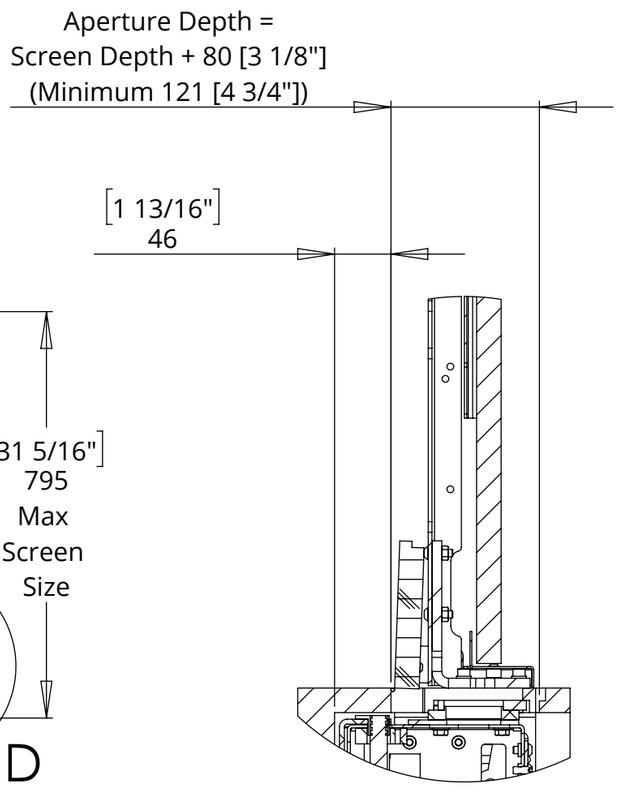



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 4


LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

MECHANISM DOWN - IN CABINET

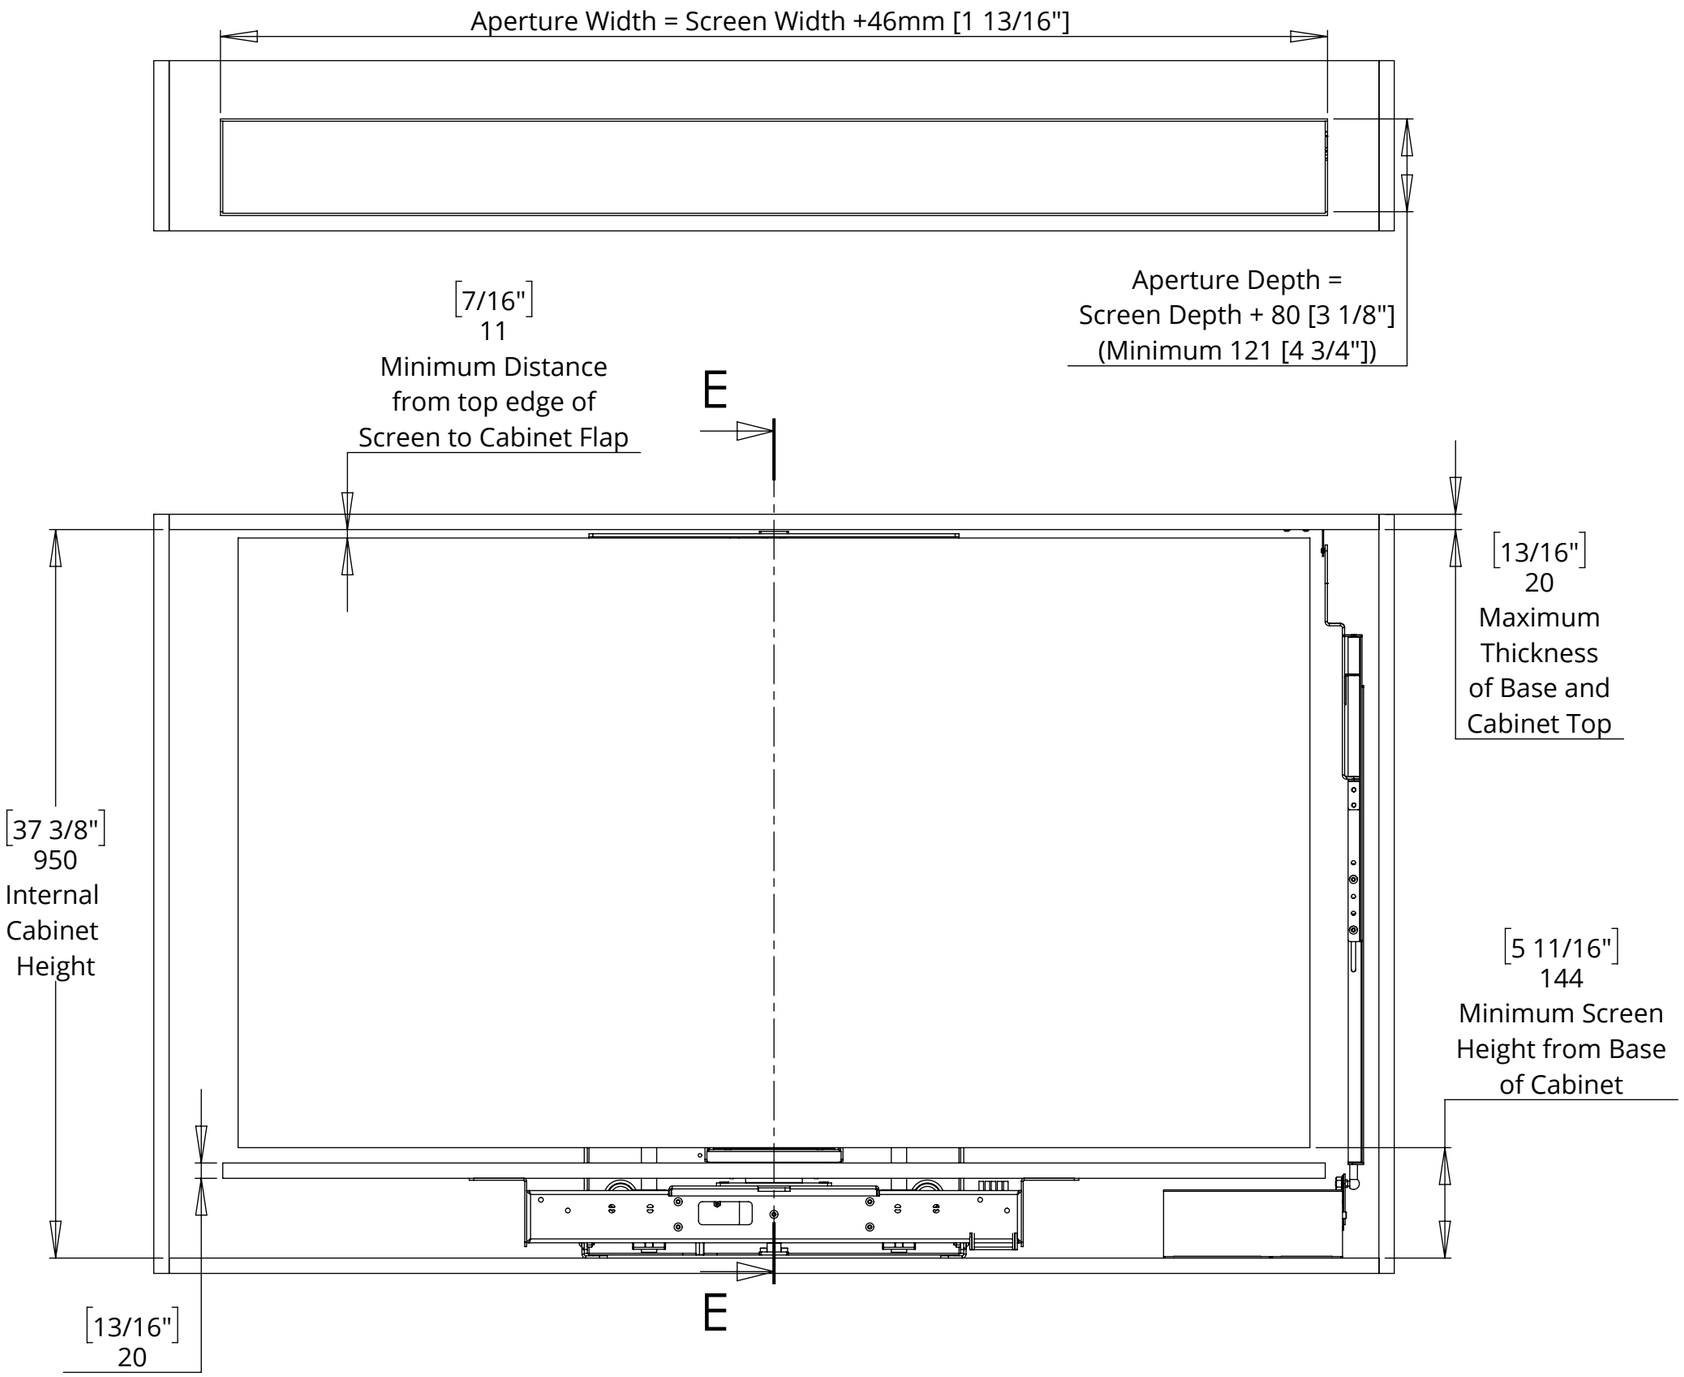

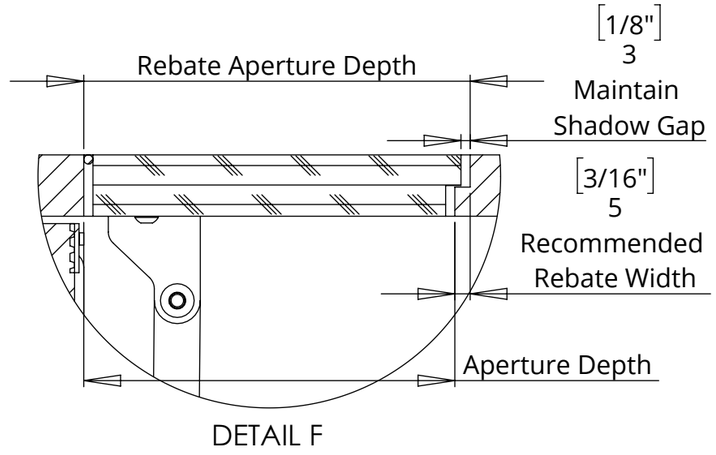

DETAIL F

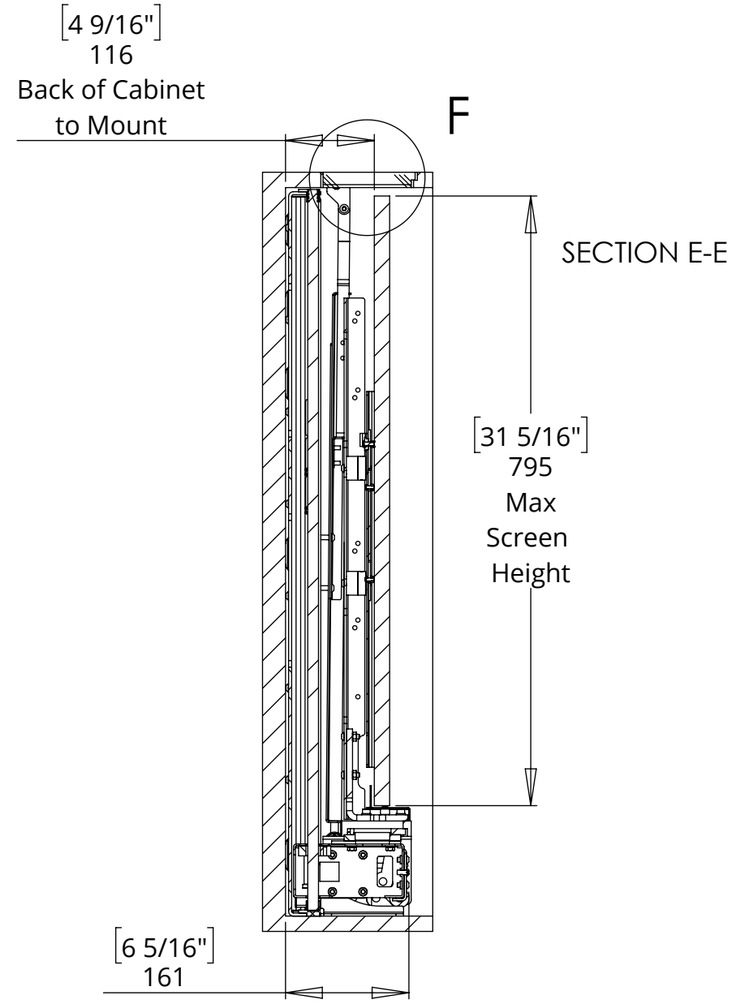

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 015
SHEET 5


LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

BASE PANEL AND FLAP DETAILS

Flap depth dimensions are based on a 3mm thick piano hinge
Required flap dimensions may vary dependant on the hinge used


FLAP PANEL - BOTTOM VIEW

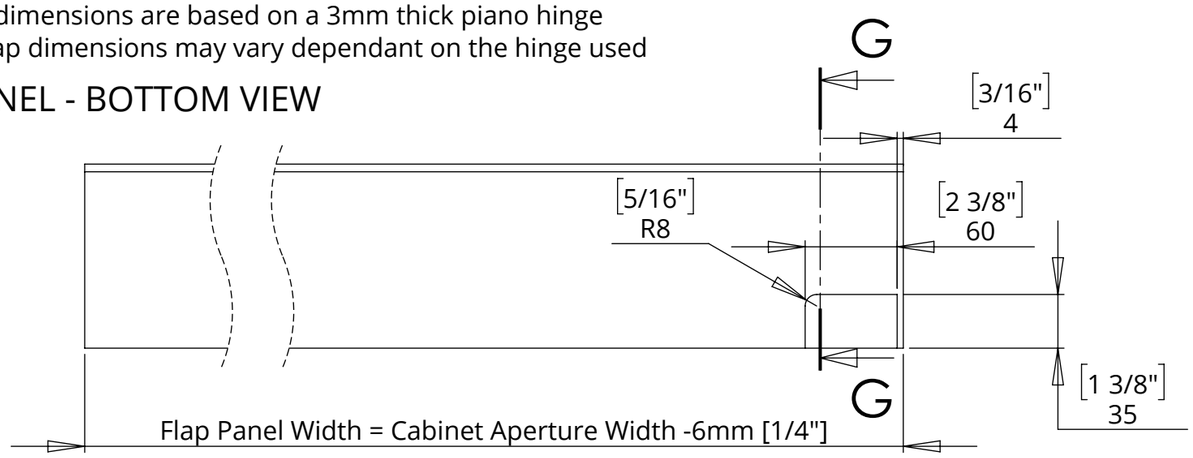


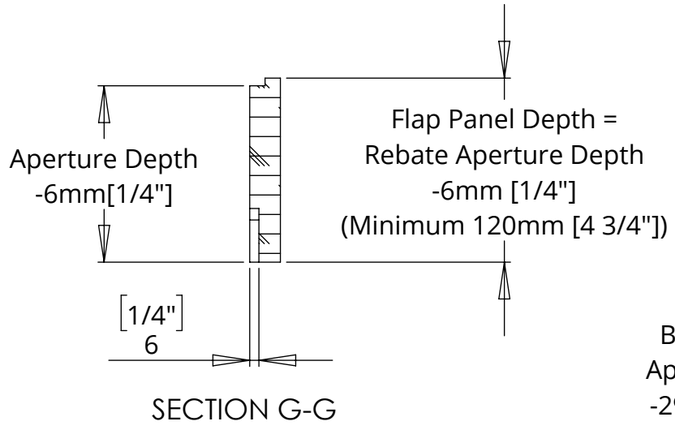


SECTION G-G


BASE PANEL - TOP VIEW

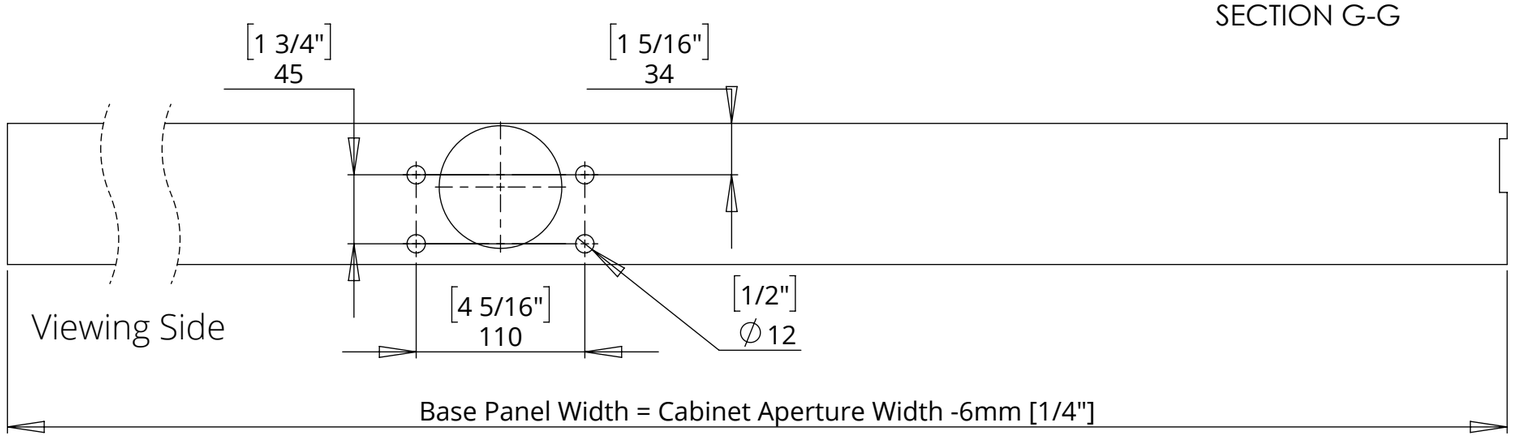

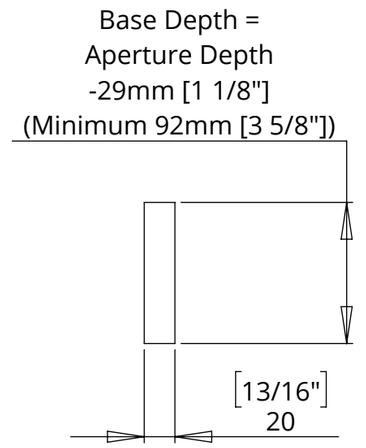

BASE PANEL - BOTTOM VIEW

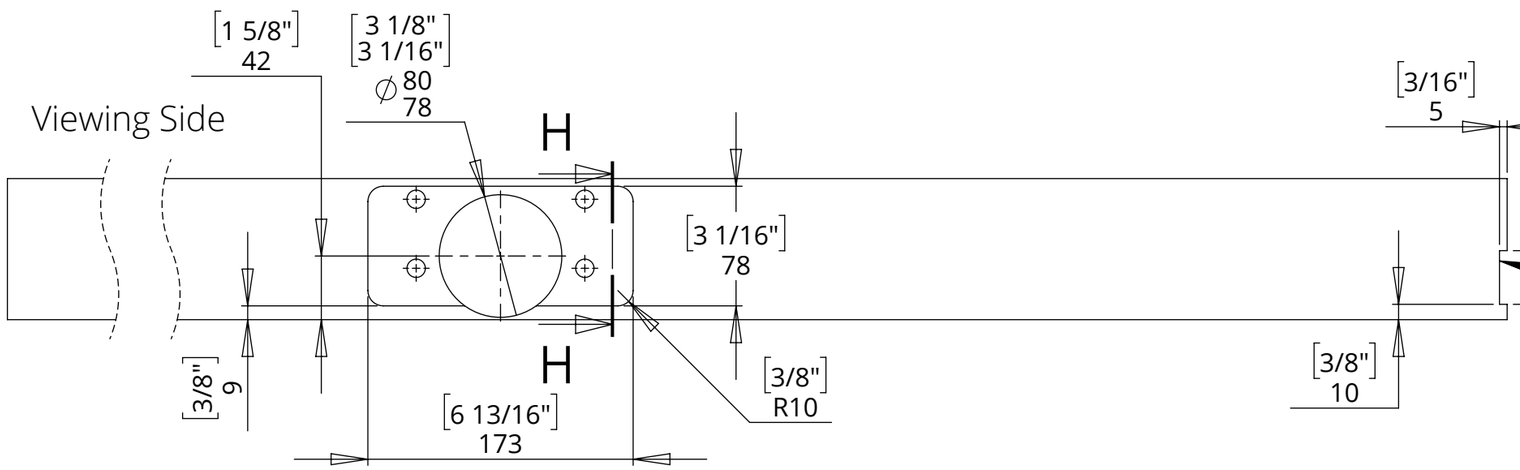

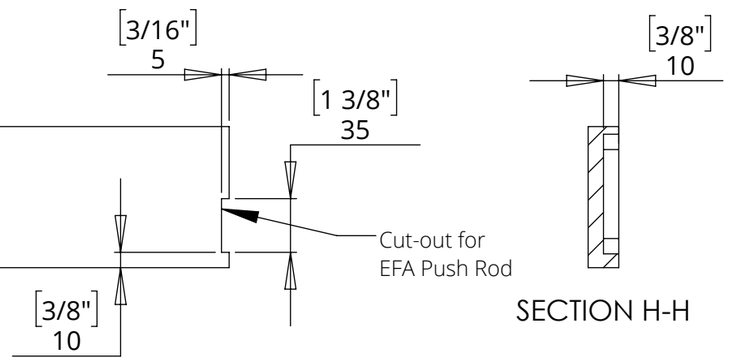

SECTION H-H


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 6

LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

POSITIONING THE EFA TO ACCOMMODATE SMALLER SCREENS

A Base Panel of less than 1170mm [46"] wide will cause the EFA to interfere with the LSM beam.
This can be avoided by orientating the EFA away from the LSM. It will however require more space for the EFA to be positioned to the side of the cabinet.

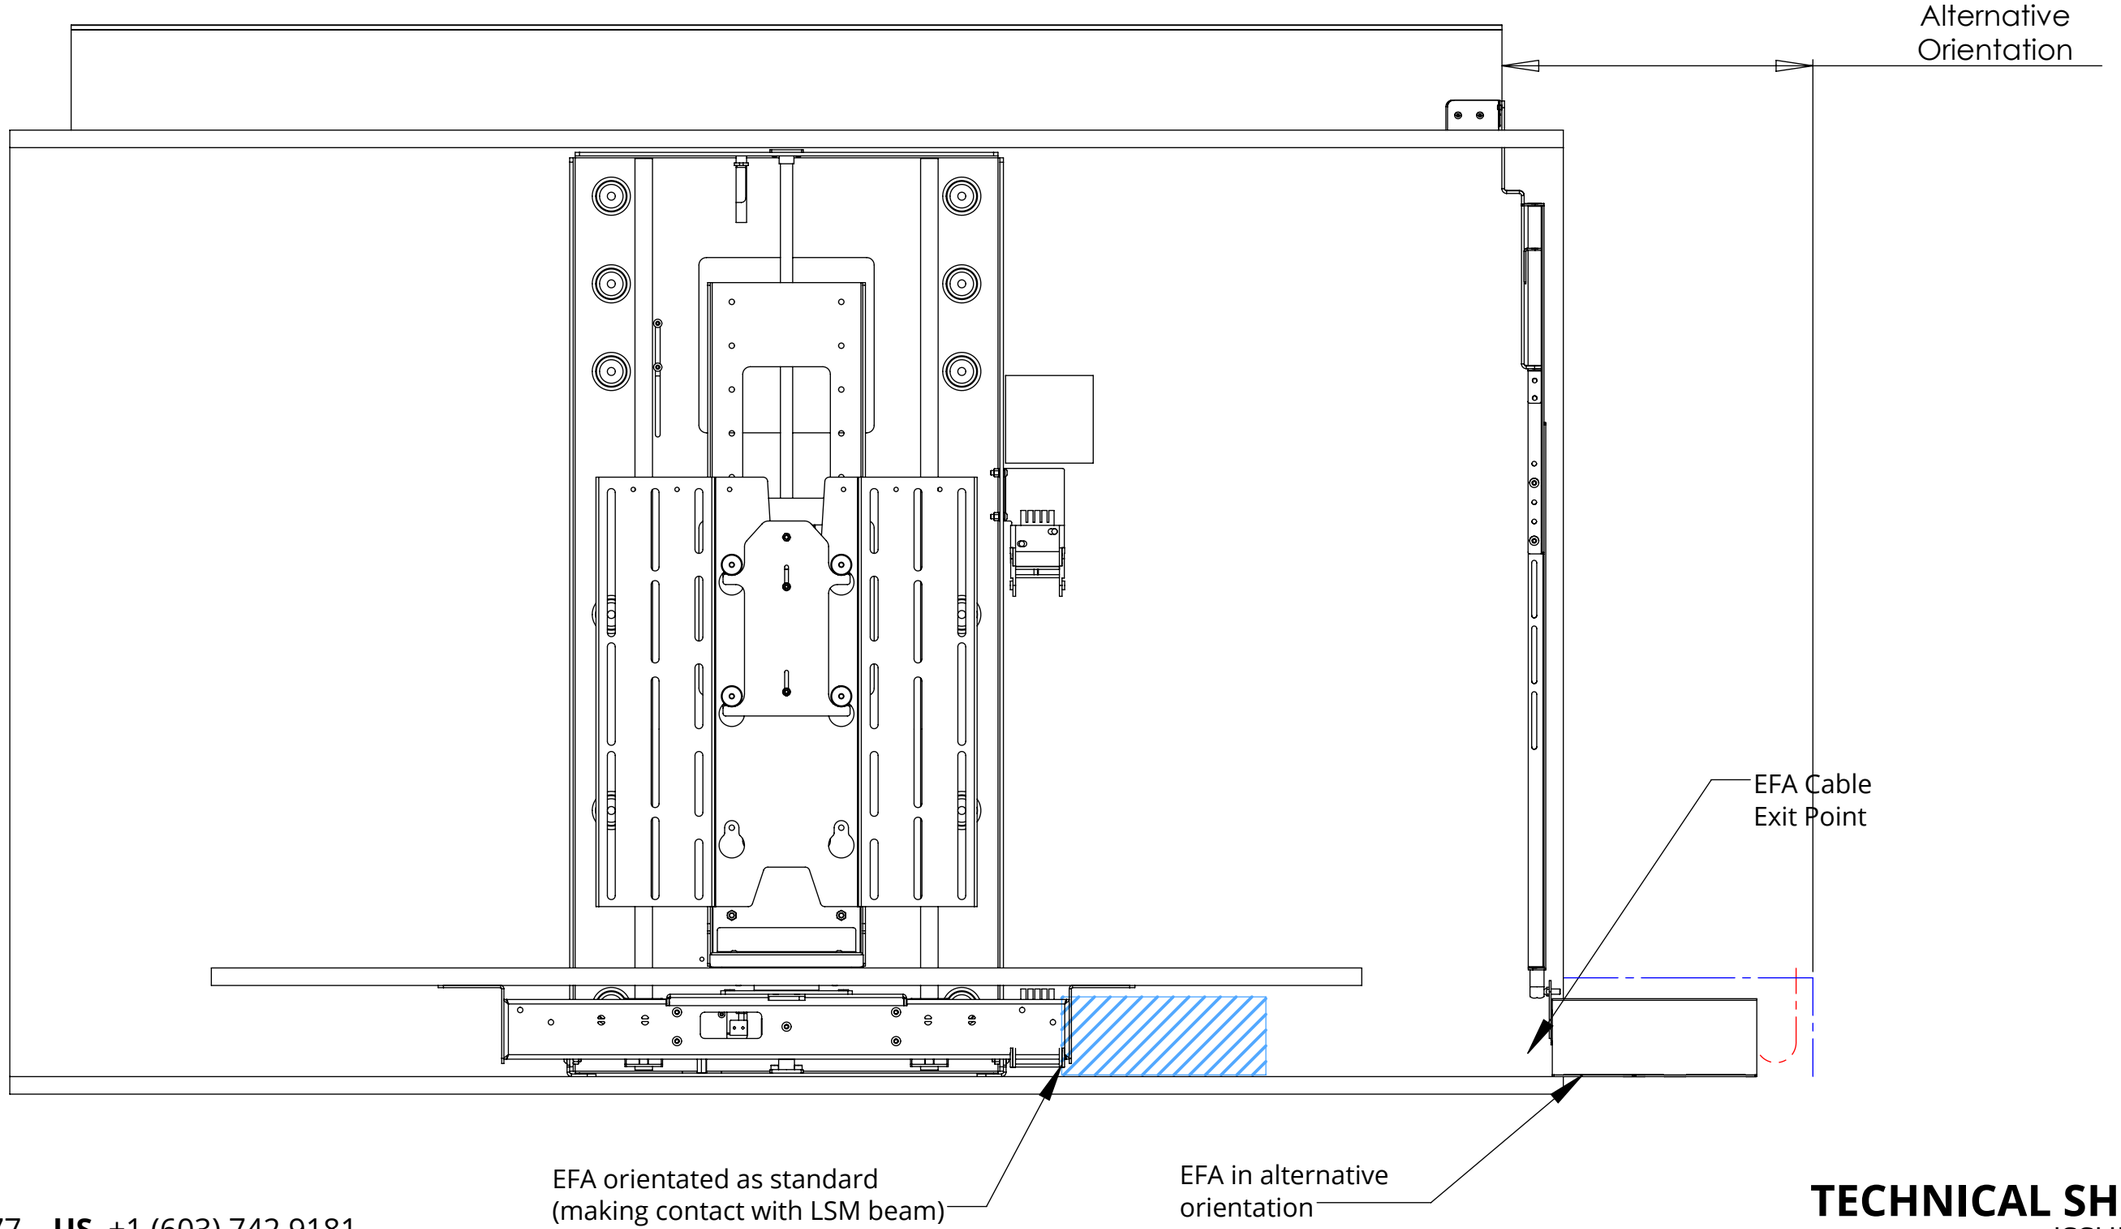

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 015
SHEET 7

LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP


SCREEN MOUNT ADJUSTABILITY

A standard adjustable height VESA 400 mount is included. This is also compatible with VESA 300 and 200 mounting patterns


Separate VESA 300 and 200 mounts are available.

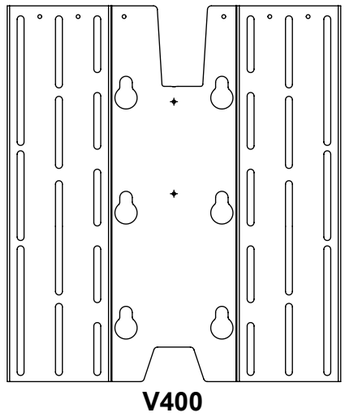


V400




V300



V200

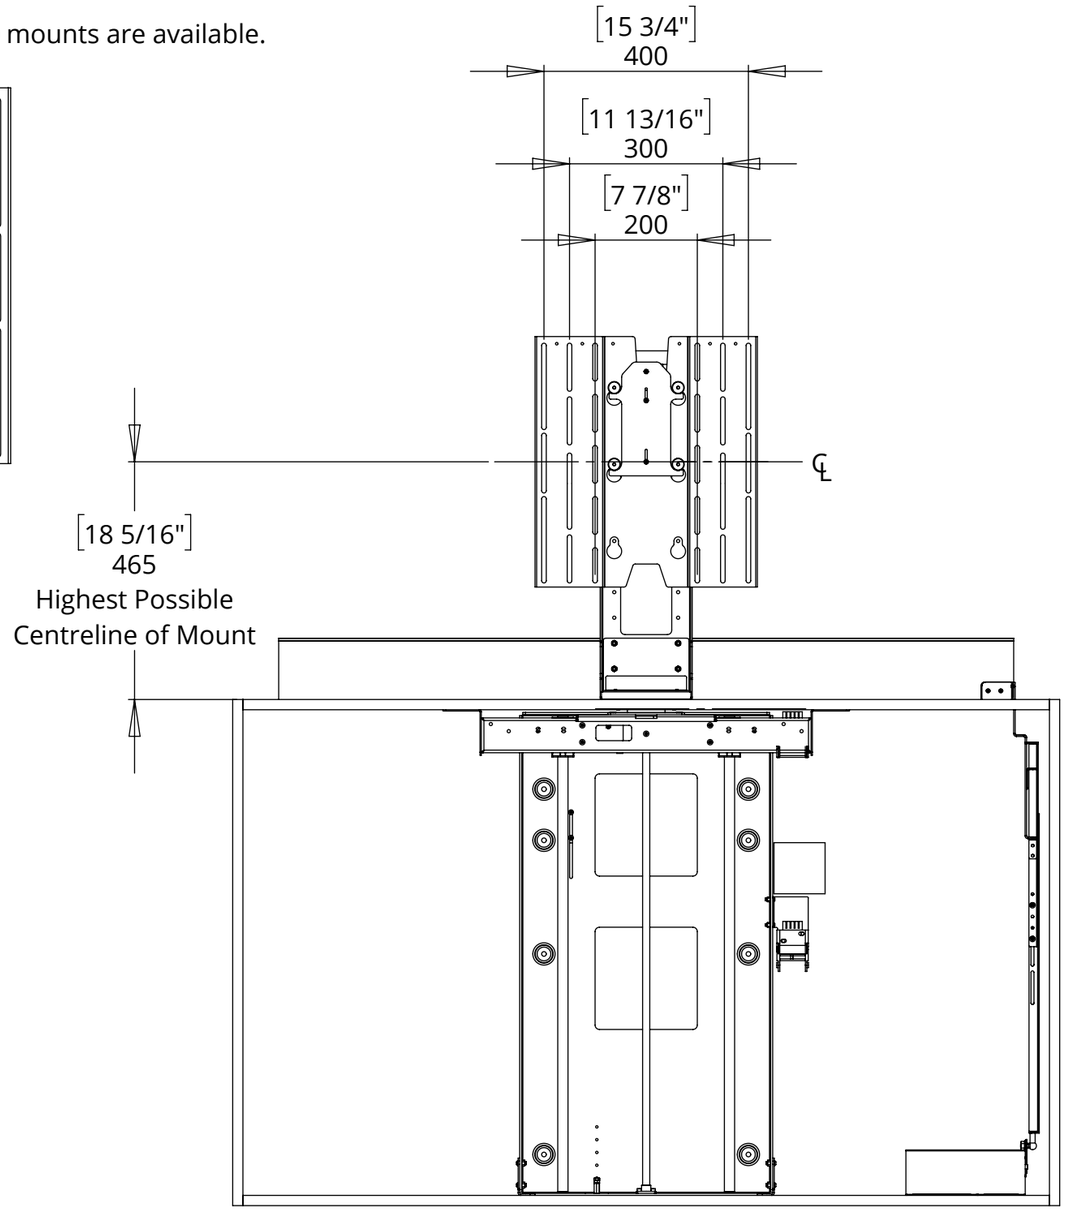

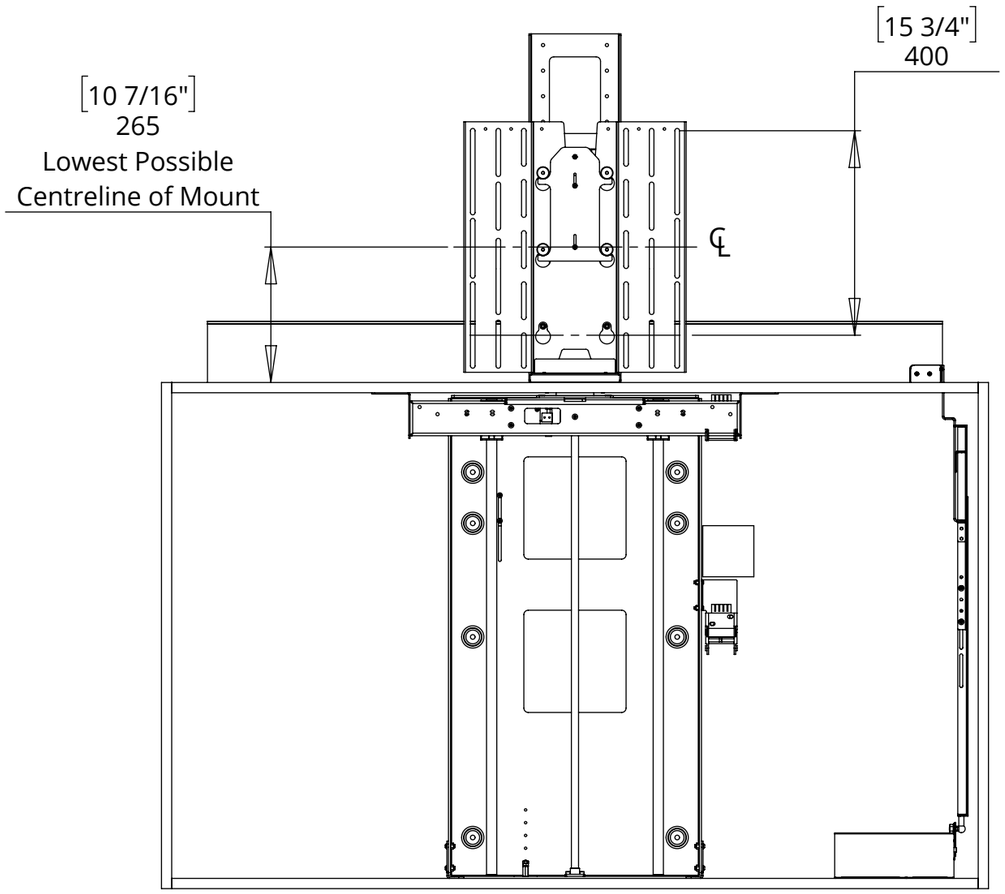


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 015
SHEET 8

LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP

MECHANISM INSTALLATION OVERVIEW



DETAIL I

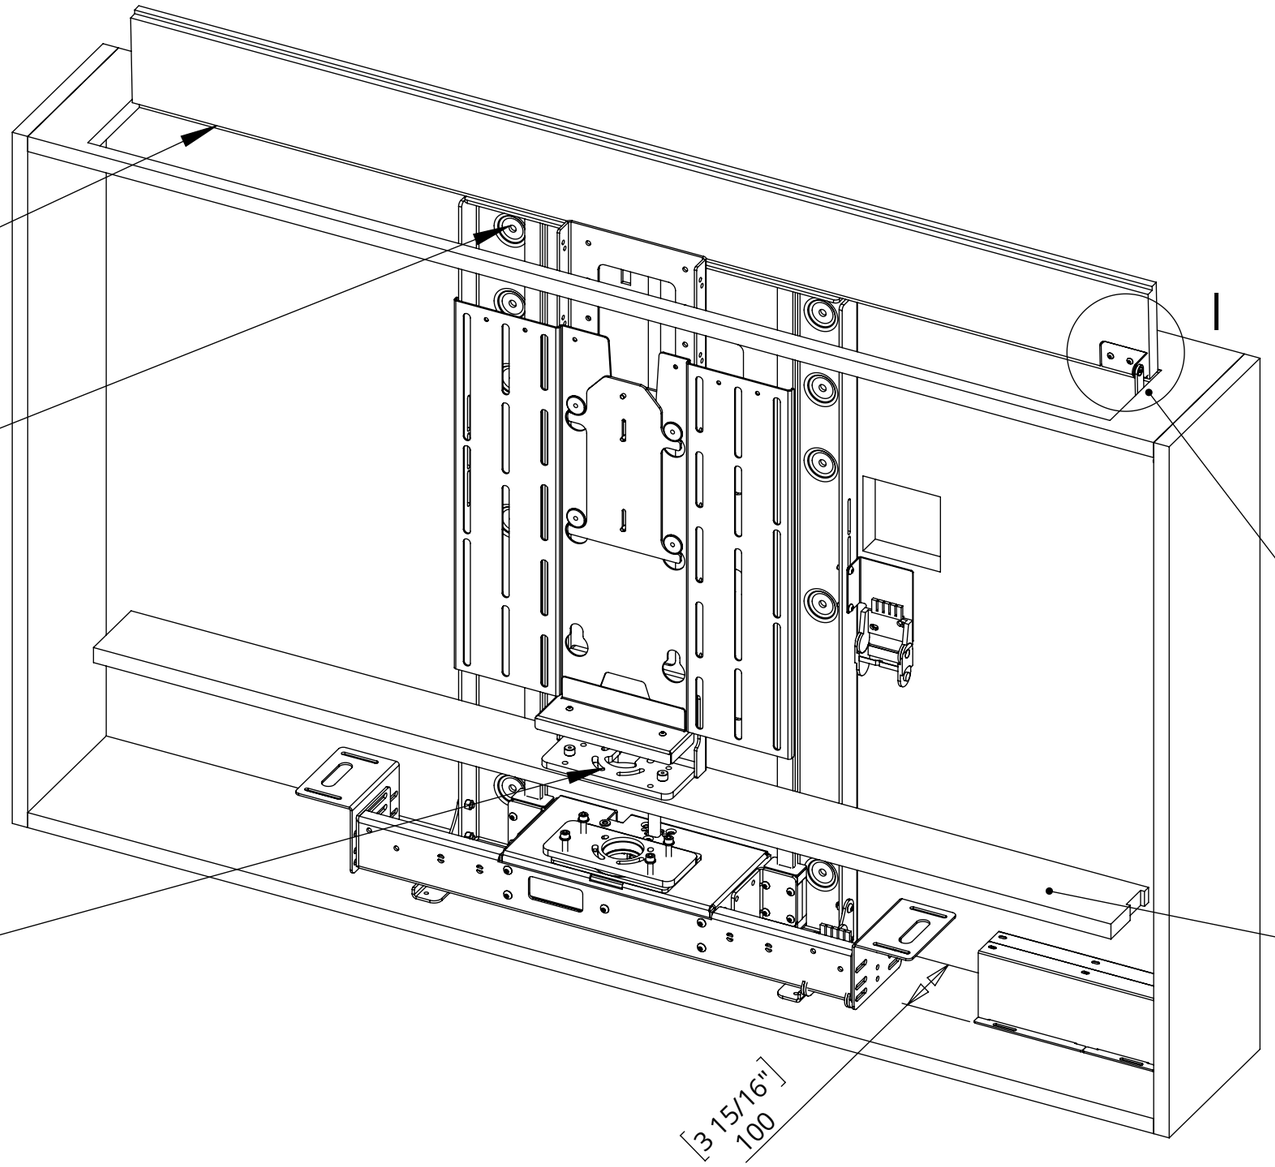

The Flap Panel is attached to a hinge at the back of the cabinet aperture.

The LSM is fixed to the back of the cabinet with wood screws.


Screen mount easily removed with concealed bolts

The EFA is fixed to the flap panel and secured to the base of the cabinet with wood screws.
The length of the push rod can be adjusted to alter the positions of the flap.


Screen mount must be removed for installation of Base Panel

LSM-EFA-6
LIFT SYSTEM MEDIUM WITH ELECTRIC FLAP


OVERALL MECHANISM DIMENSIONS

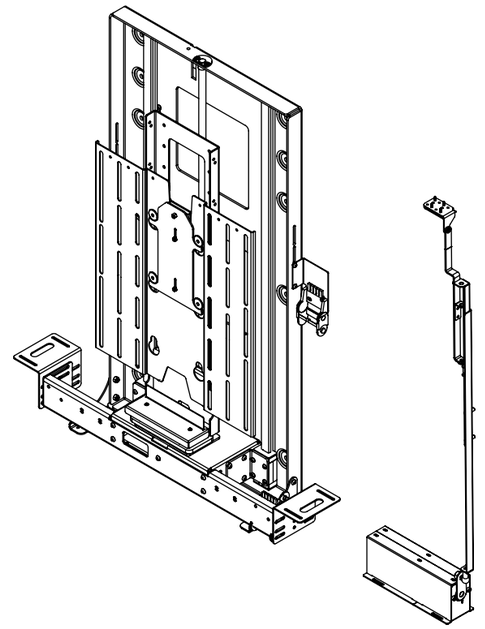

MECHANISM - UP POSITION

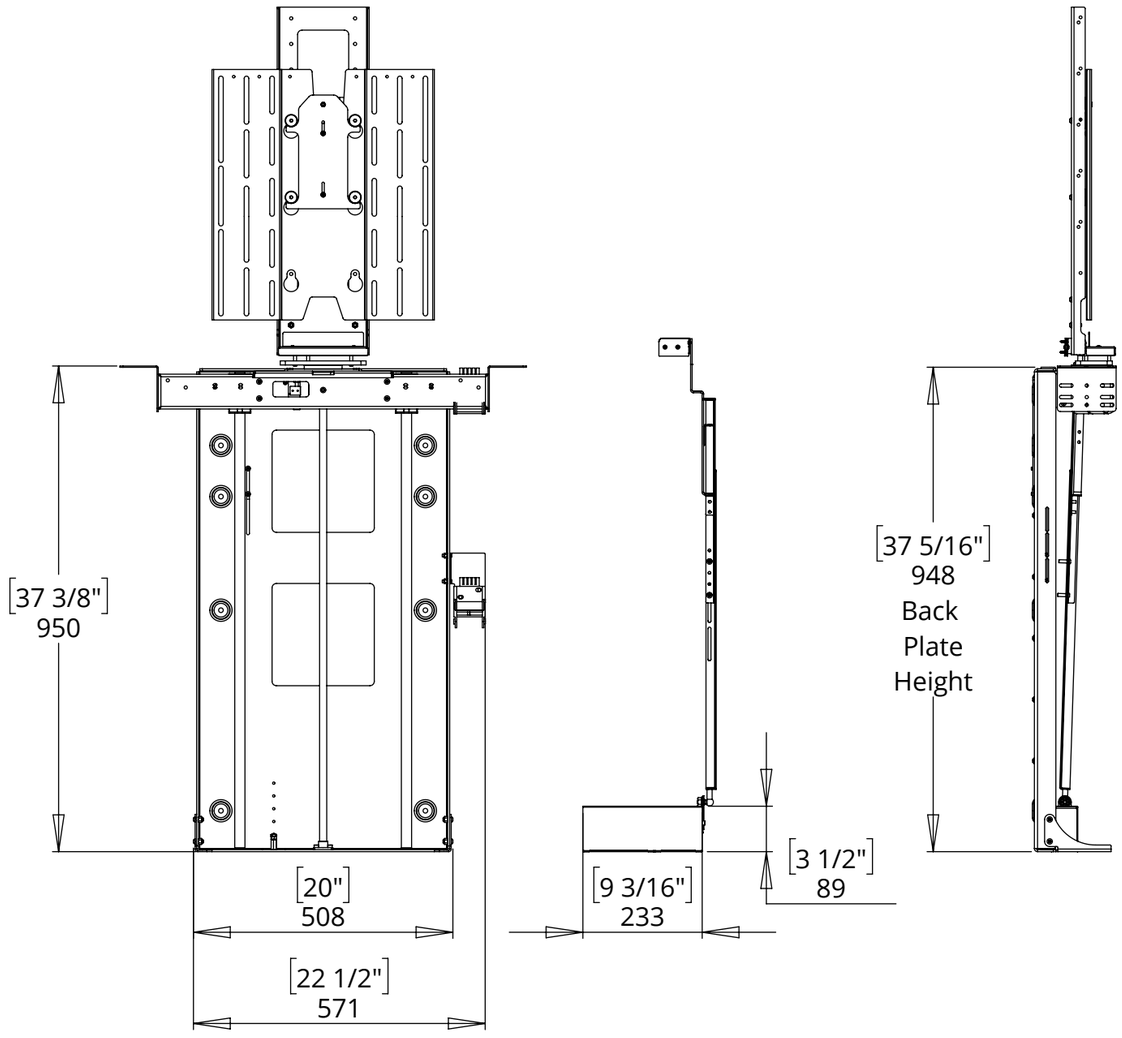

MECHANISM - DOWN POSITION

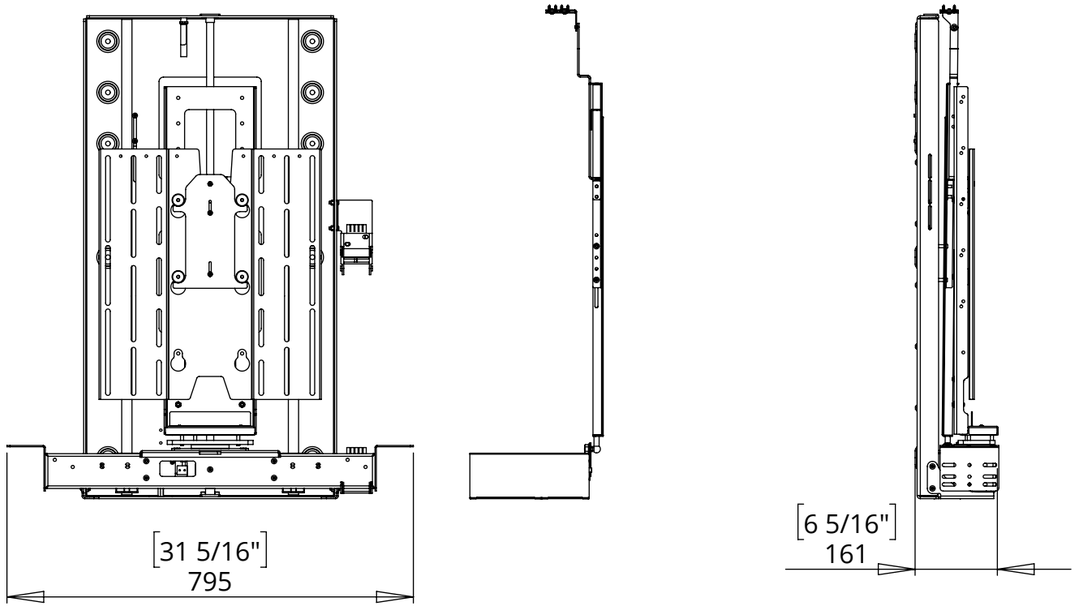

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 015
SHEET 10