

MDM-T940
MOVING DOOR MECHANISM

future automation

Closed Position

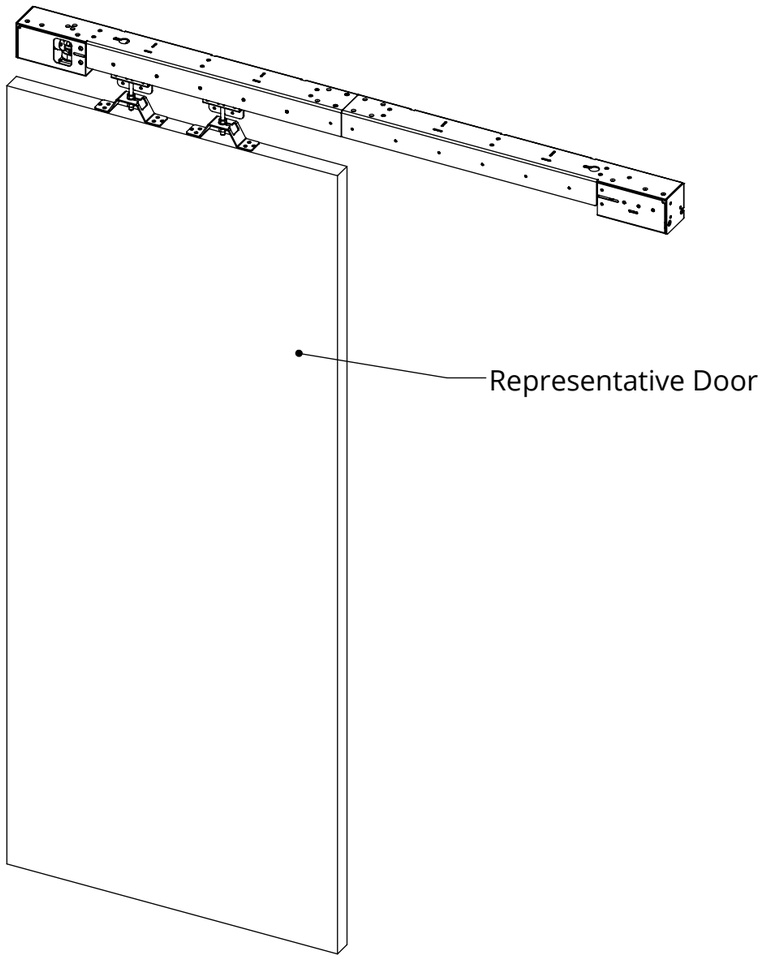

Open Position

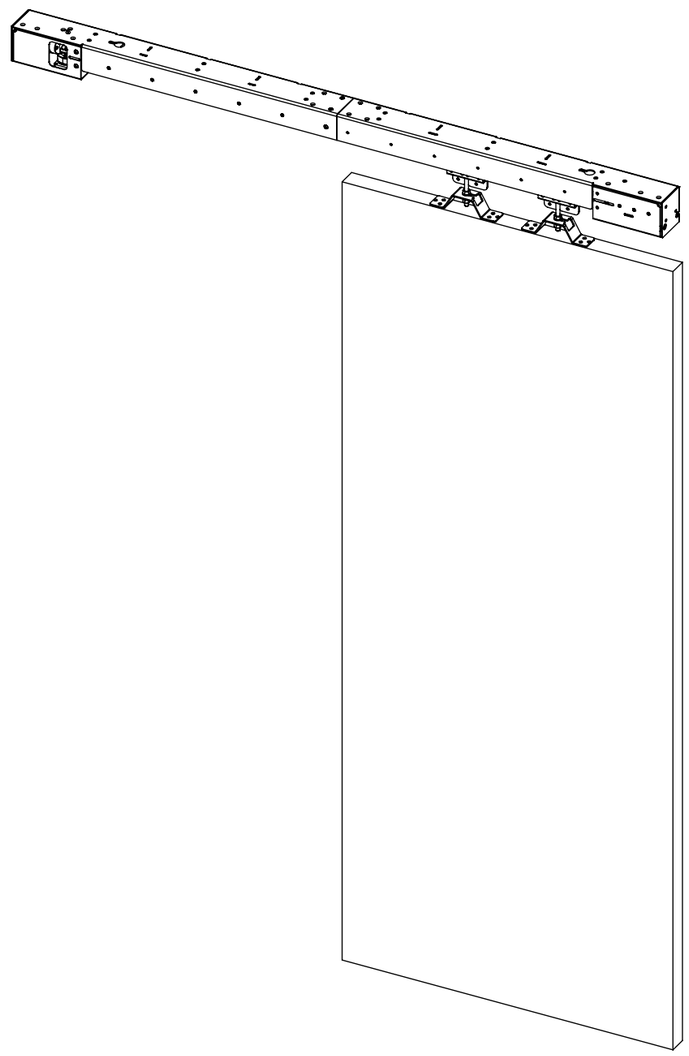


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 002
SHEET 1

MDM-T940
MOVING DOOR MECHANISM

future automation

PANEL CLOSED

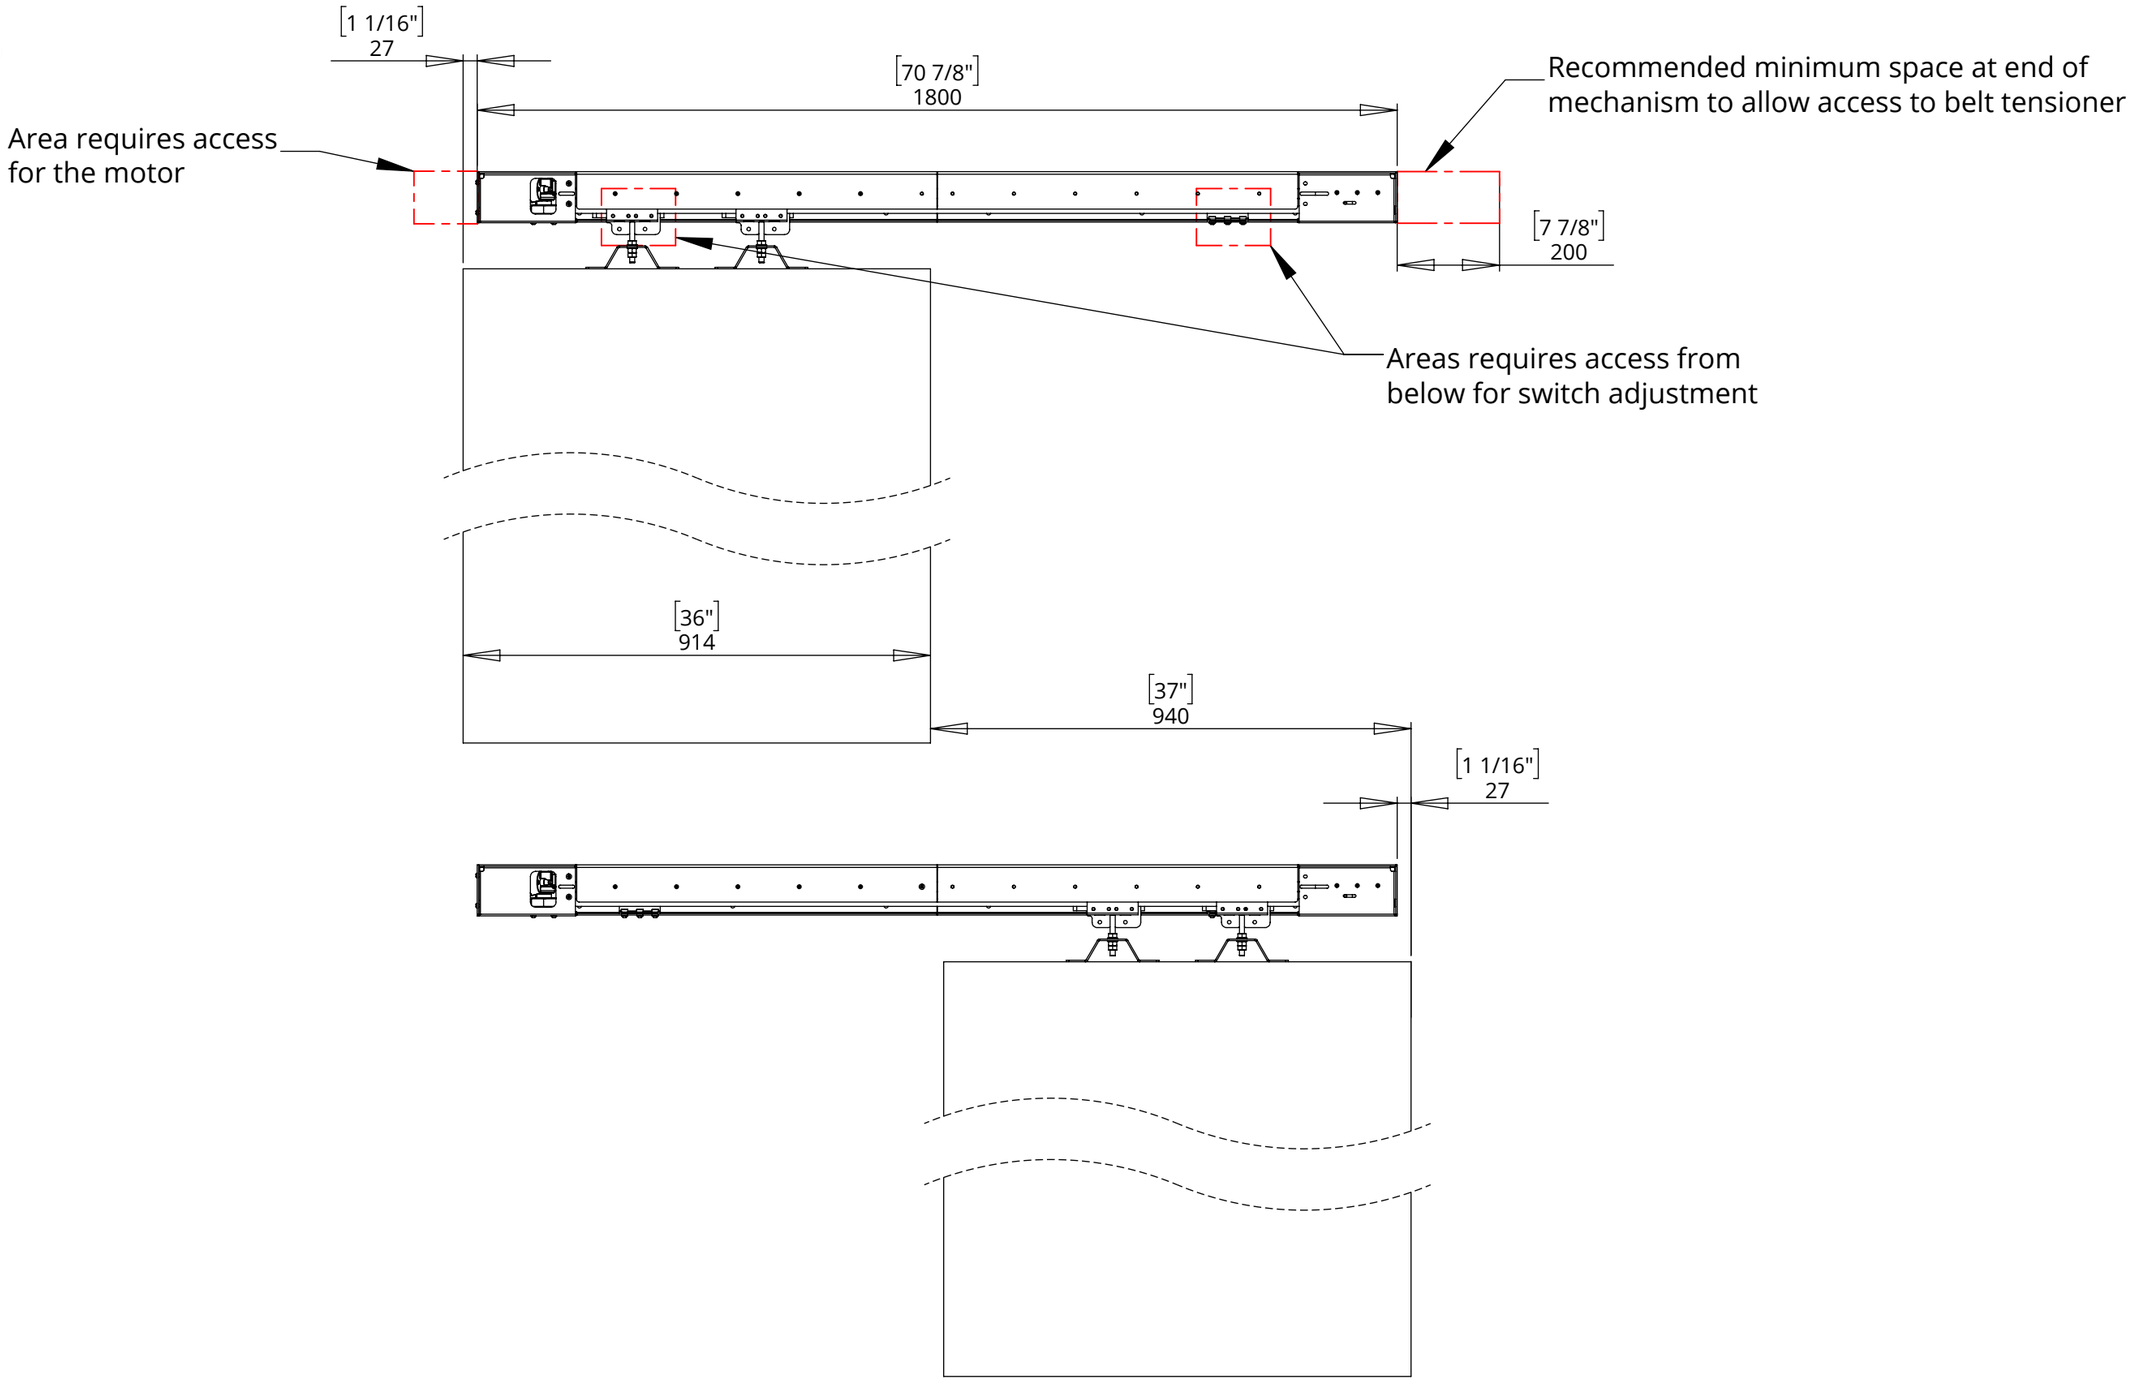


PANEL OPEN

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 002
SHEET 2


MDM-T940
MOVING DOOR MECHANISM

GENERAL DIMENSIONS

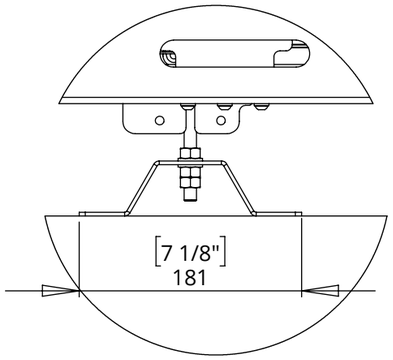

DETAIL B


Hanger Adjustment
Loosen the nuts and raise or lower to desired position

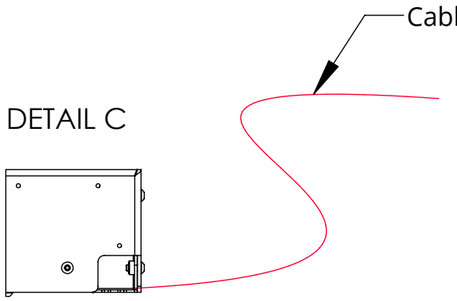


DETAIL C

Motors located at the end of the mechanism.
Recommended to allow access from below for servicing.

MDM is fixed from underneath through mounting holes in the column

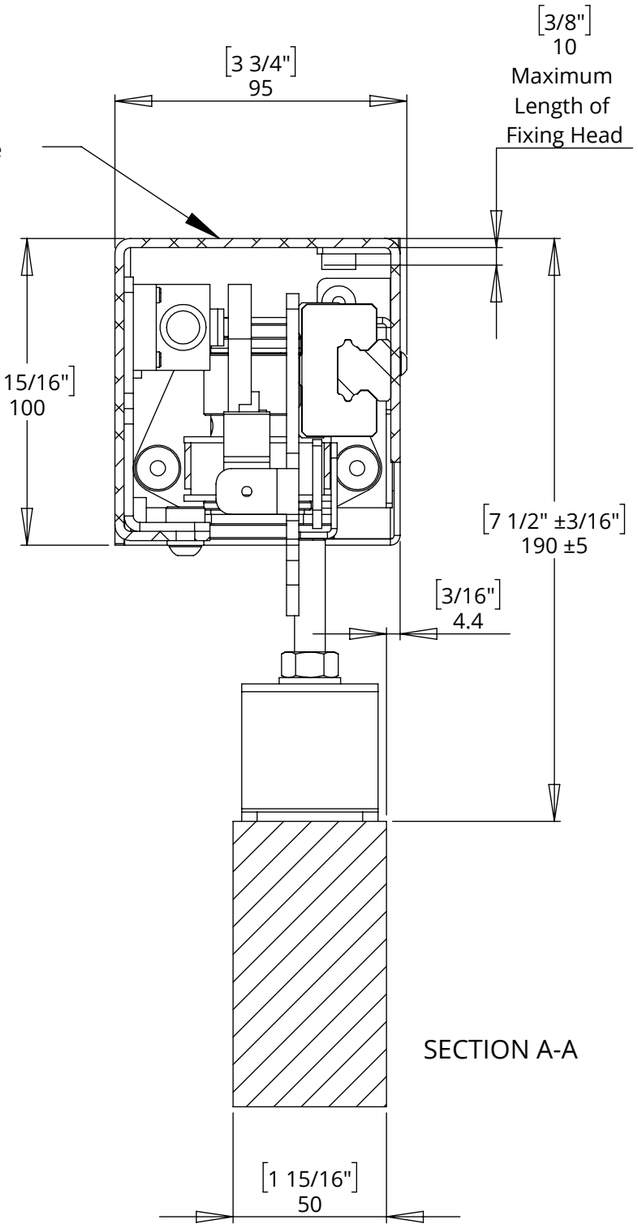

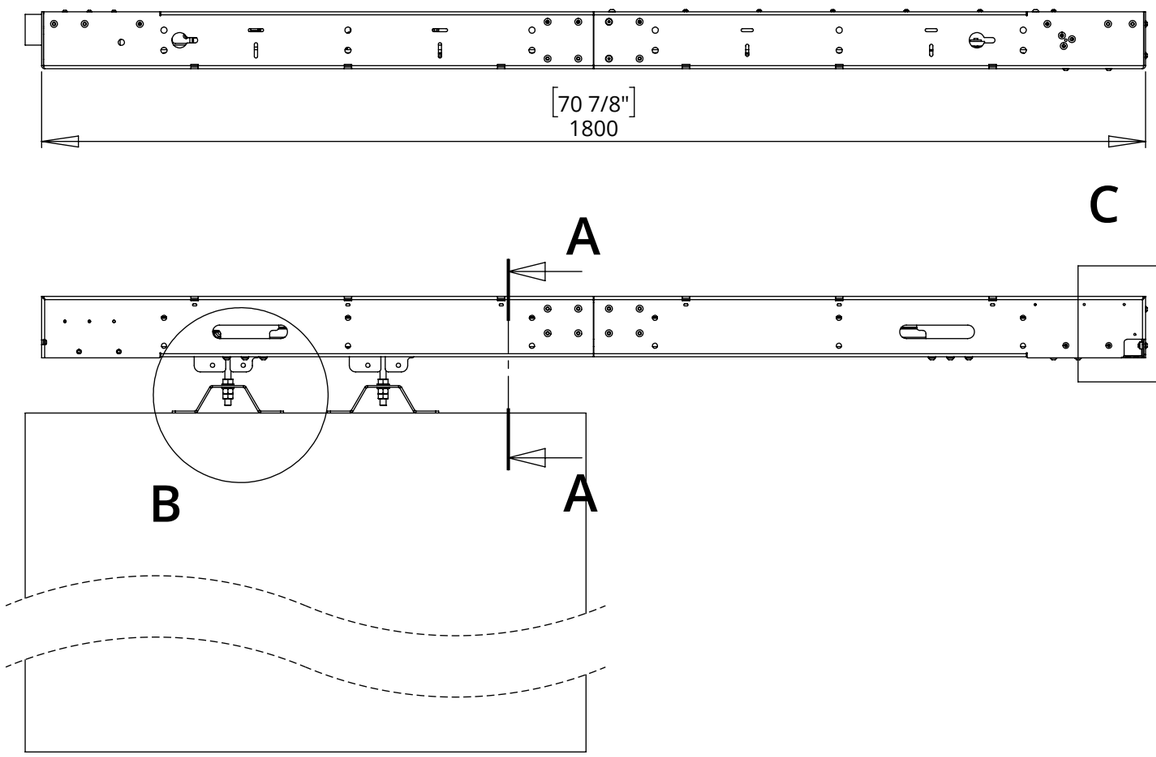


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 002
SHEET 3


MDM-T940
MOVING DOOR MECHANISM

SWITCH ADJUSTMENT

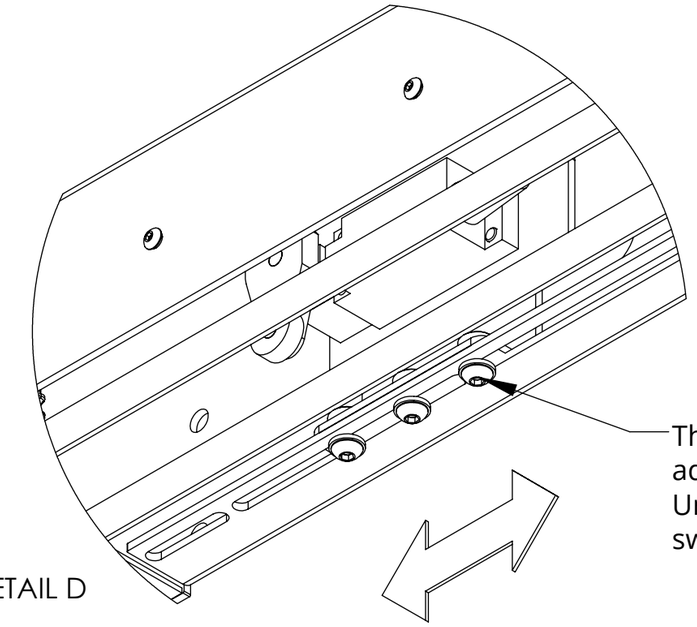

DETAIL D

The limit switches can be adjusted using an allen key. Undo the bolts and slide switch to desired position.

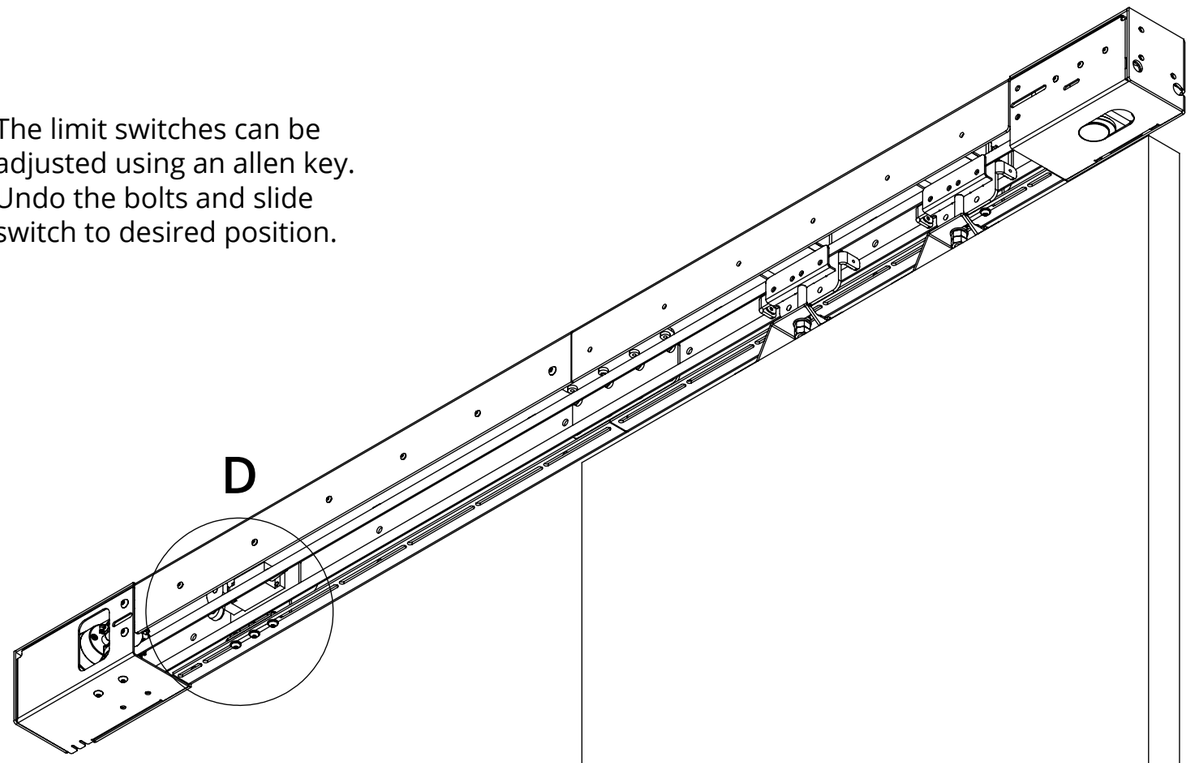



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 002
SHEET 4

MDM-T940
MOVING DOOR MECHANISM

future automation

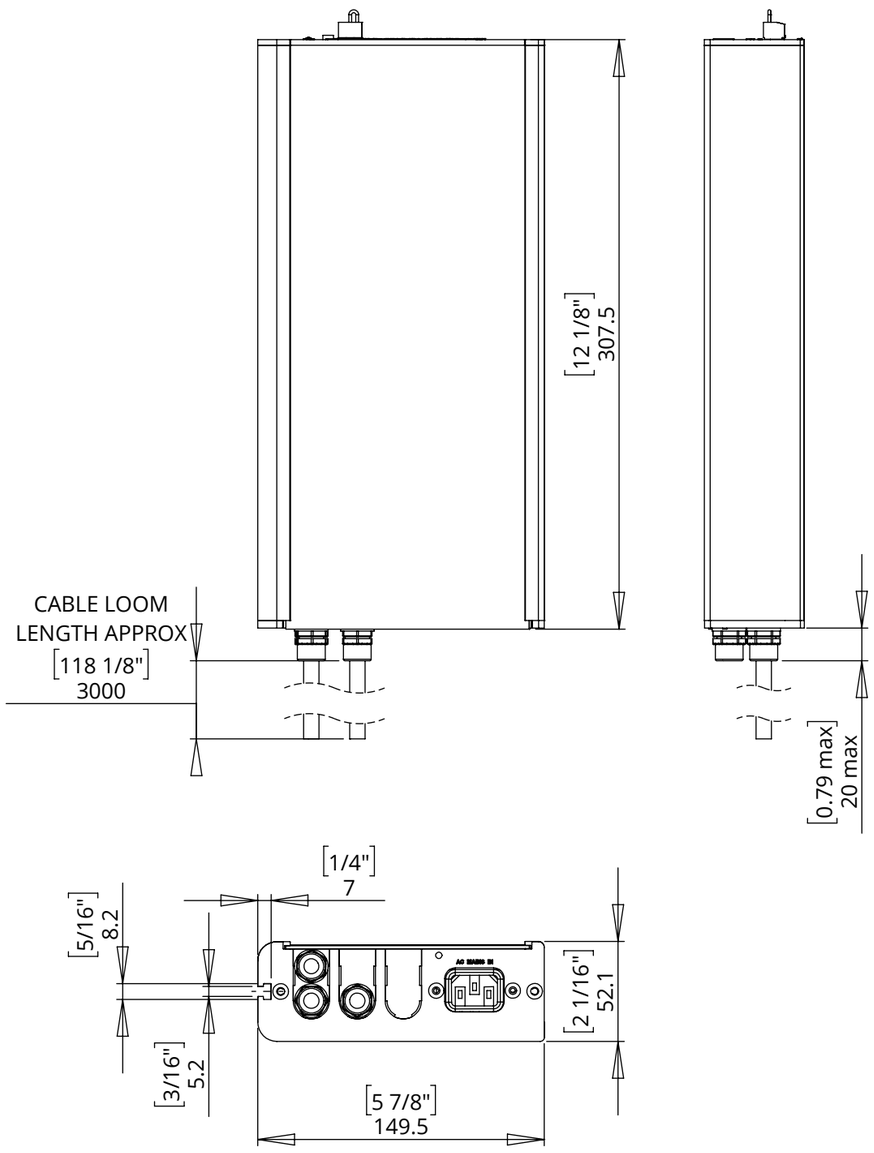

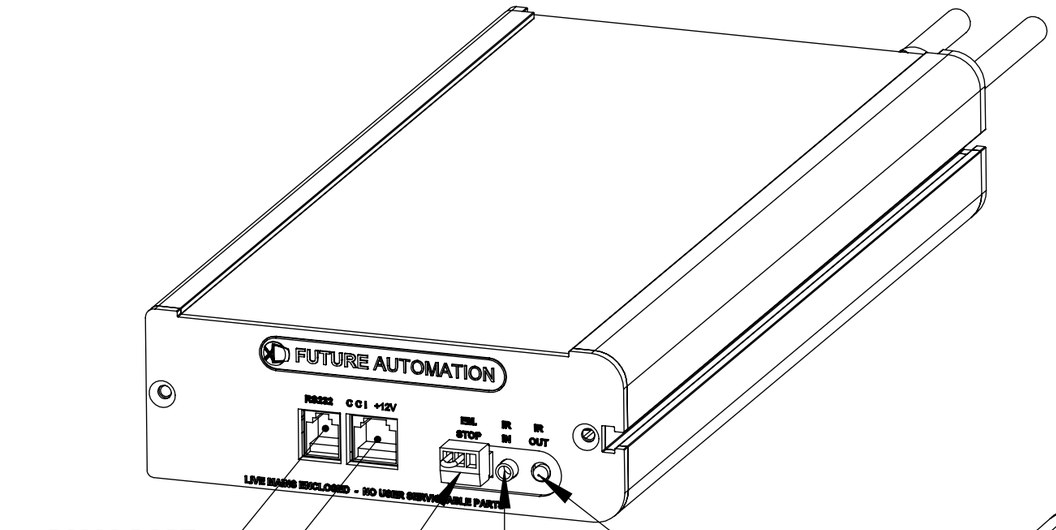

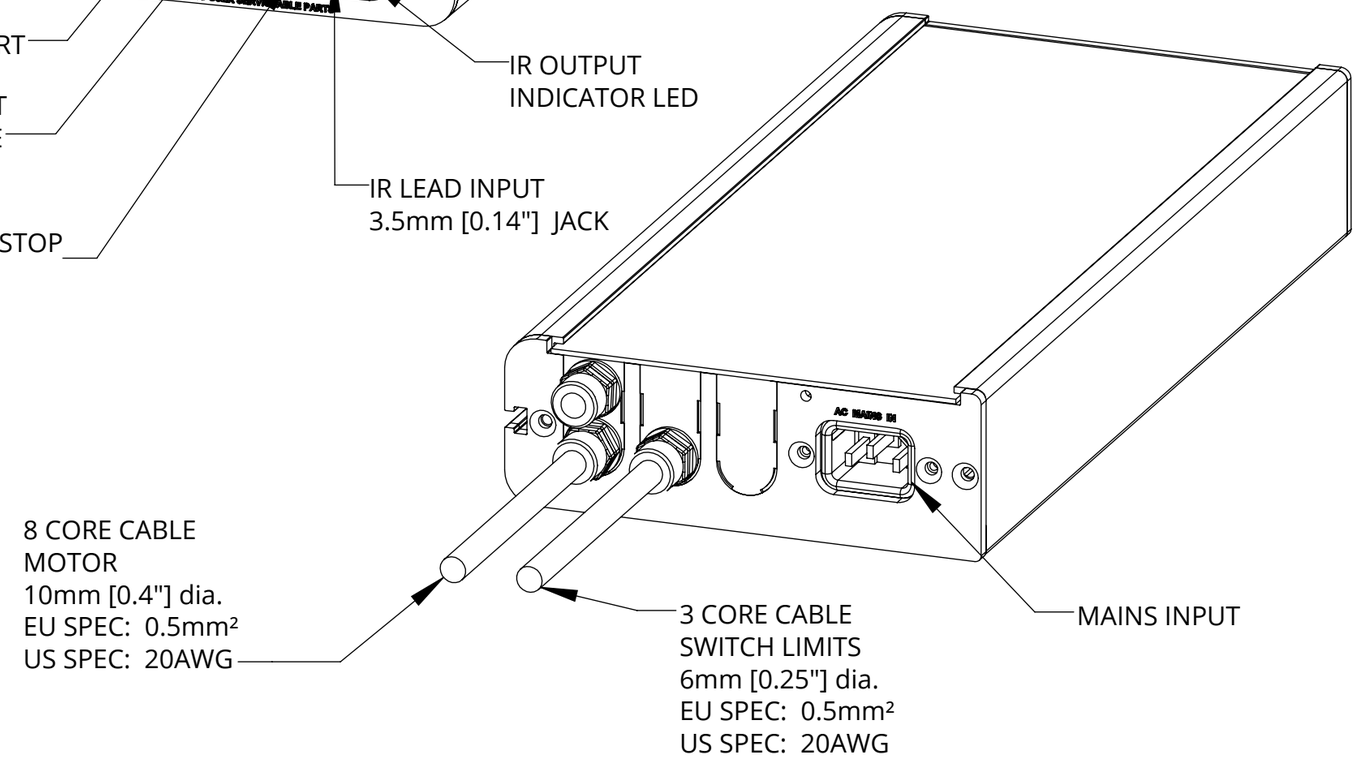

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 002
SHEET 5